


PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

SPECIFIER \_\_\_\_\_ MEMO \_\_\_\_\_

ORDERING CODE BREAKDOWN

## Lucie Linear

2 FT + 4 FT + 6 FT | TRACK MOUNT  
LED TRACK MOUNT LINEARS

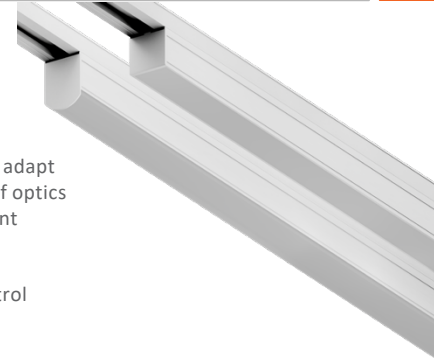

### MAIN FEATURES

- 95 CRI Standard
- Versatile linear luminaire designed to easily adapt into your current track layout with a variety of optics
- Effective heat emission for thermal management
- Integrated driver meets IEEE 1789-2015 Low Risk flicker category across dimming range
- Custom optic platform to ensure excellent light control
- 5-year warranty



FIXTURE	LENGTH	VOLTAGE	BEAM SPREAD	CRI	CCT	LUMENS	FINISH	MOUNTING
LCL		1 : 120V with 1% Phase-cut Dimming	DFL : Direct Flush Lambertian Distribution DFN : Direct Flush Narrow Distribution DFA : Direct Flush Asymmetric Distribution DFB : Direct Flush Batwing Distribution DRL : Direct Round Lambertian Distribution	9 : 95+ CRI	27 : 2700K 30 : 3000K 35 : 3500K 40 : 4000K 50 : 5000K		BK : Black PW : Perfect White SV : Silver	H : H-type (1/1) J : J-type (1/1) L : L-type (1/1)
	2F : 2' Length					1200 : 13W 1700 : 19W 2300 : 19W		
	4F : 4' Length					2600 : 27W 3600 : 40W 4600 : 40W		
	6F : 6' Length					3600 : 40W 5100 : 60W 6800 : 60W		

\*Consult factory for lead time and availability

**WARNING:** Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit [solais.com/dimming](http://solais.com/dimming) for up-to-date dimmer compatibility information.

**NOTES:** This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**

## Lucie Linear

2 FT + 4 FT + 6 FT | TRACK MOUNT  
LED TRACK MOUNT LINEARS

### OPTICS + PERFORMANCE

- 4 custom beam spreads available
  - Lambertian
  - Narrow
  - Asymmetric
  - Bat-wing
- 2 ft.: 2300 or 1700 lumens at 19W or 1200 lumens at 13W
- 4 ft.: 4600 or 3600 lumens at 40W or 2600 lumens at 27W
- 6 ft.: 6800 or 5100 lumens at 60W or 3600 lumens at 40W
- Color Temperatures
  - 95 CRI: 2700K, 3000K, 3500K, 4000K, 5000K
- Fixture life: 50,000 hours

### ELECTRICAL

- 120V with phase-cut TRIAC and ELV dimming to 1%

### CONSTRUCTION + FINISH

- Weight: 2 ft.: 1.5 lbs.; 4ft: 2.5 lbs.
- Rigid aluminum extruded body
- Standard finishes:
  - White: RAL 9003
  - Black: RAL 9005
  - Silver: RAL 7001

### MOUNTING

- J-type, L-type, H-type Track; 120V, 1-circuit/1-neutral


### LISTINGS

- IP20 and IK08 rated
- UL Listed for dry location (E487826)
- RoHS-compliant
- BAA compliant
- Designed and assembled in U.S.A.

### WARRANTY


- 5-year warranty

### DIMENSIONAL DETAILS

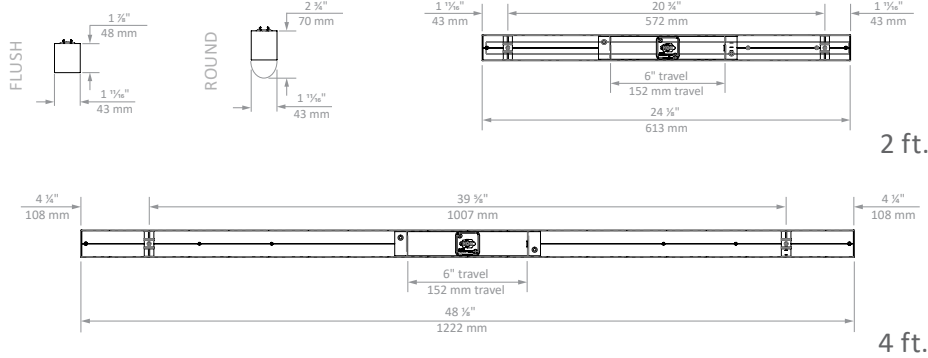


### OPTIC DISTRIBUTIONS


#### LAMBERTIAN




#### NARROW



#### ASYMMETRIC



#### BAT-WING



### TM30 COLOR REPORTS

- 3000K with 95 CRI
- $R_A = 95$ ;  $R_g = 62$
- $R_f = 92$ ;  $R_b = 101$

