



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424
E-mail: info@ledtronics.com
Website: http://www.ledtronics.com

LDLGX24QU-12WF-XxW-101A (SERIES)

LED CFL-Replacement Omnidirectional Lamps; Frosted
100~277Vac; 11W; 4 Pin GX24Q Base
Warm White (3000K) & Natural White (4000K)



DWG BY:
SRL / GP / HF
08-15-17

R&D:
UF
06-12-24

MFG:
PP
06-14-24

QA:
LUV
06-14-24

REVISION LTR: C
ECR#: 061224-HF01
06-12-24

○ Features

Operating Temperature	-40°C to +50°C
Heatsink Temperature	30°C~40°C
Heatsink Material / Color	Aluminum / Silver
Lens Material / Color	Polycarbonate / Frosted White
Body Material	Polycarbonate / White
UL / cUL Listed	E474634 (CH-CORN-12W)
LED LM80 Report	Yes
LM79 Report	-
Protection Rating	IP64
LED Type	Epistar SMD 2835
Dimmable	No
Life Span	50,000 hrs.
Warranty	5 Years
Weight	0.31 lbs.




○ Electro-Optical Characteristics

Part Number	LDLGX24QU-12WF-XIW-101A	LDLGX24QU-12WF-XNW-101A
Input Voltage (typ)	100~277Vac	100~277Vac
Tested @ (Voltage)	120Vac	120Vac
Power Consumption	10 W	11.2 W
Current Consumption	0.085 A	0.145 A
Efficacy: (Lm/W)	85	101
Lumens	885 lm	1,127 lm
Maximum Candela	100 cd	119 cd
Power Factor	0.98	0.65
CRI (Ra)	≥80	
CCT	3000K	4000K
Color	Warm White	Natural White
Angle of illumination	360° Omnidirectional	

○ **Dimensions**



SIDE VIEW

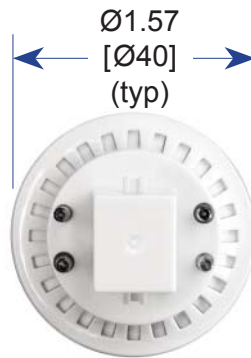

REAR VIEW

Tolerance:

XXX +/- .010
XX +/- .025

Notes:

1. All Dimensions are in Inches [Millimeters].

**Caution: Only installations where lamp is oriented vertically,
with base inserted either up or down.**