




FEATURING FLEXCOLOR ALLOWING EASY IN-FIELD ADJUSTABILITY.

Perfect for PL applications for areas in offices, hotels, lobbies, schools, etc.

- Replaces up to 42W CFL including 26W and 32W
- Easily toggle between CCTs via switch on the lamp
- Up to 1460 lumen output
- Suitable for use in dry or damp environments
- Not approved for use in enclosed fixtures

FLEXCOLOR
SWITCH BETWEEN 3 CCTs

OPTIONAL EMERGENCY BATTERY BACKUP




LED-EMG-05WCP
(SEE EMERGENCY DRIVER SPEC SHEET FOR ORDERING AND MORE INFO)




7320




7324

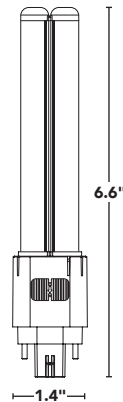


LED-7320-G4



G24q/GX24q

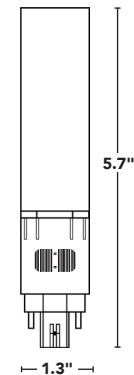

LED-7324-G4



G24q/GX24q



G24Q BASE TYPE



OPEN FIXTURES



CRI



LED-7320



LED-7324



OPERATING TEMP



50,000hrs
RATED LIFE

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT	MOUNTING	BASE
LED-7320-FC1-G4	197810000419	42W 4 Pin	10W	1350-1460	FLEXCOLOR 3000K/3500K/4000K		G24q/GX24q
LED-7320-FC2-G4	197810004080			1320-1460	FLEXCOLOR 2700K/4000K/5000K		
LED-7324-FC1-G4	197810004073		9W	1270-1360	FLEXCOLOR 3000K/3500K/4000K		
LED-7324-FC2-G4	197810004097			1230-1360	FLEXCOLOR 2700K/4000K/5000K		

RECOMMENDED MOUNTING ORIENTATION ↗ BASE UP ↘ BASE DOWN ↔ HORIZONTAL




BALLAST COMPATIBILITY LIST

	COMPATIBLE BALLASTS	1 LAMP / 120V	1 LAMP / 277V	2 LAMP / 120V	2 LAMP / 277V
PHILIPS ADVANCE	2S13-H1-LD	✓	✓	✓	✓
	2S18-H1-LD	✓	✓	✓	✓
	2S26-H1-LD	✓	✓	✓	✓
	2S42-M2-LD	✓	✓	✓	✓
UNIVERSAL TRIAD	C213UNVME	✓	✓	✓	✓
	C218UNVME	✓	✓	✓	✓
	C2642UNVME	✓	✓	✓	✓
OSRAM SYLVANIA	QTP1/2X18CF/UN DM	✓	✓	✓	✓
	QTP 2X26CF/UNV DM	✓	✓	✓	✓
KEYSTONE	KTEB-226-UV-TP-PIC-DW	✓	✓	✓	✓