






- Multi-directional mounting capability & 360° design. Use base down, base up or base sideways without affecting performance
- Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture
- Field adjustable light output via physical switch on the product

SUPERFLEX SWITCH BETWEEN
3 WATTAGES & 3 CCTS

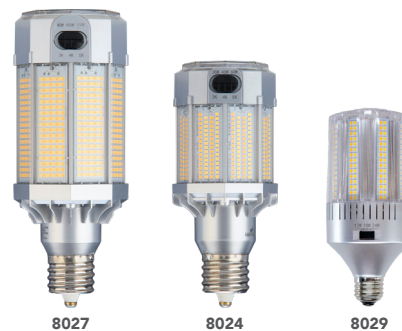

PART #	UPC	REPLACES	WATTAGE*	VOLTAGE	LUMENS	CCT*	BASE	DLC CODES
LED-8029E345-A-FW	84400606067	UP TO 150W	FLEXWATT 12W/18W/24W	120-277V	1550-3360	FLEXCOLOR 3000K/4000K/ 5000K	E26	N/A
LED-8029M345-A-FW	84400606068				EX39		PVPFGTKS	
LED-8024E345-G7-FW	844006060718	UP TO 320W	FLEXWATT 35W/45W/60W		5140-8870		E26	N/A
LED-8024M345-G7-FW	844006060725			EX39			PE8R4NVO	
LED-8024M345-G7-FW-HV	197810029977			277-480V	EX39		PENDING	
LED-8027M345-G7-FW	844006060756	UP TO 400W	FLEXWATT 80W/100W/110W	120-277V	11370-15730		EX39	PMXF5D5C
LED-8027M345-G7-FW-HV	844006077129			277-480V			EX39	S-IESFDP
LED-8075M345-FW	197810016526	UP TO 750W	FLEXWATT 150W/200W/270W	120-277V	21700-39000		EX39	S-5ZV7XV
LED-8075M345-FW-HV	197810016533			277-480V			EX39	S-NZM9KT
LED-8000M345-FW-MV	197810016540	UP TO 1000W	FLEXWATT 300W/360W/450W	208-347V	50100-73300		EX39	S-NTFFVQ
LED-8000M345-FW-HV	197810016557			277-480V			EX39	S-3DM41B

* FLEXWATT AND FLEXCOLOR VALUES — MIN/DEFAULT/MAX





🇨🇦 347 VOLT OPTIONS FOR CANADA 🇨🇦

PART #	UPC	REPLACES	FLEXWATTAGE*	LUMENS	FLEXCOLOR*	BASE	DLC CODES
LED-8029E345C-A-FW	84400606069	70W-100W-150W	12W/ 18W /24W	1550-3360	3000K/ 4000K / 5000K	E26	N/A
LED-8029M345C-A-FW	84400606070	70W-100W-150W	12W/ 18W /24W	1550-3360		EX39	P55Z8FTK
LED-8024E345C-G7-FW	844006060732	175W-250W-320W	35W/ 45W /60W	5140-8870		E26	N/A
LED-8024M345C-G7-FW	844006060749	175W-250W-320W	35W/ 45W /60W	5140-8870		EX39	P17WDCCW
LED-8027M345C-G7-FW	844006060763	320W-400W	80W/ 100W /110W	11370-15730		EX39	POIALL6T
LED-8000M345-FW-MV	197810016540	UP TO 1000W	300W/ 360W /450W	50100-73300		EX39	S-NTFFVQ

* FLEXWATT AND FLEXCOLOR VALUES — MIN/DEFAULT/MAX

LUMENS

LED-8029					LED-8024					LED-8027				
WATTAGE		CCT		LUMENS	WATTAGE		CCT		LUMENS	WATTAGE		CCT		LUMENS
MIN	12W	MIN	3000K	1550	MIN	35W	MIN	3000K	5140	MIN	80W	MIN	3000K	10780
	12W	DEFAULT	4000K	1610		35W	DEFAULT	4000K	5290		80W	DEFAULT	4000K	11290
	12W	MAX	5000K	1650		35W	MAX	5000K	5360		80W	MAX	5000K	11370
DEFAULT	18W	MIN	3000K	2450	DEFAULT	45W	MIN	3000K	6200	DEFAULT	100W	MIN	3000K	13800
	18W	DEFAULT	4000K	2560		45W	DEFAULT	4000K	6510		100W	DEFAULT	4000K	14270
	18W	MAX	5000K	2610		45W	MAX	5000K	6620		100W	MAX	5000K	14350
MAX	24W	MIN	3000K	3170	MAX	60W	MIN	3000K	8440	MAX	110W	MIN	3000K	15080
	24W	DEFAULT	4000K	3330		60W	DEFAULT	4000K	8790		110W	DEFAULT	4000K	15690
	24W	MAX	5000K	3360		60W	MAX	5000K	8870		110W	MAX	5000K	15730

LED-8075					LED-8000				
WATTAGE		CCT		LUMENS	WATTAGE		CCT		LUMENS
MIN	150W	MIN	3000K	21700	MIN	300W	MIN	3000K	50100
	150W	DEFAULT	4000K	22700		300W	DEFAULT	4000K	52200
	150W	MAX	5000K	22900		300W	MAX	5000K	52400
DEFAULT	200W	MIN	3000K	29300	DEFAULT	360W	MIN	3000K	57800
	200W	DEFAULT	4000K	30700		360W	DEFAULT	4000K	60100
	200W	MAX	5000K	30900		360W	MAX	5000K	60300
MAX	270W	MIN	3000K	36900	MAX	450W	MIN	3000K	69700
	270W	DEFAULT	4000K	38800		450W	DEFAULT	4000K	73100
	270W	MAX	5000K	39000		450W	MAX	5000K	73300

