



Turning Light into Savings ▶▶▶



Wide angle adjustable
Knuckle mount with
indication of 30°, 60° or 90°



FDL Floodlight 29W, 58W

naturaLED® outdoor lighting's classic floodlight provides energy efficient floodlighting solutions with a wide distribution. These powerful floodlights are available in two wattages, providing a versatile choice for applications such as facade, area and sign lighting.

Our FDL floodlights attach with knuckle mount providing a wide angle adjustable position from 30 to 90 degrees.

Key Features & Benefits

- ▶ Architectural & Spot Luminaires
- ▶ Long life LED chips
- ▶ Uniform and consistent color
- ▶ Excellent thermal design
- ▶ Power factor > 0.95
- ▶ CRI 70
- ▶ 120-277V
- ▶ 50,000 hrs rated average life
- ▶ Operating temp: -22°F~122°F
- ▶ 1/2" knuckle mount

Applications

- ▶ Area Lighting
- ▶ Spot Luminaires
- ▶ Architectural Lighting
- ▶ General Site Illumination
- ▶ Signage Lighting

Color Choices



Bronze

Qualifications




ORDERING INFORMATION





2

Item Code	Description	Color Temp	Wattage	Lumen Output	Equivalent Wattage	Voltage (V)	CRI	Rated Hours	Beam Angle	Color			
7179	LED-FXFDL29/40K/DB-KNC	4000K	29	3,336	175	120-277	70	50,000	Flood	Bronze	●	●	●
7180	LED-FXFDL29/50K/DB-KNC	5000K	29	3,336	175	120-277	70	50,000	Flood	Bronze	●	●	●
7181	LED-FXFDL58/40K/DB-KNC	4000K	58	6,735	250	120-277	70	50,000	Flood	Bronze		●	●
7182	LED-FXFDL58/50K/DB-KNC	5000K	58	6,735	250	120-277	70	50,000	Flood	Bronze		●	●

► Dimensions

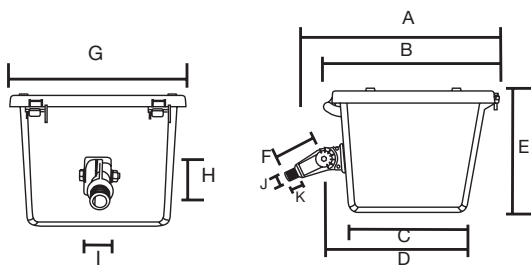	Wattage	A	B	C	D	E
	29 / 58	11.75-in	10.25-in	7.00-in	8.50-in	7.25-in
	F	G	H	I	J	K
	2.75-in	9.00-in	2.00-in	1.50-in	0.75-in	0.75-in

► Illuminance Distribution

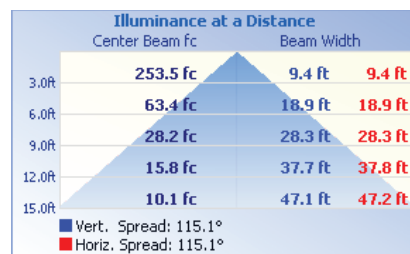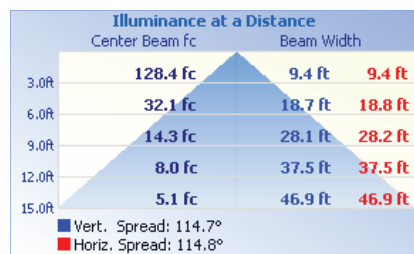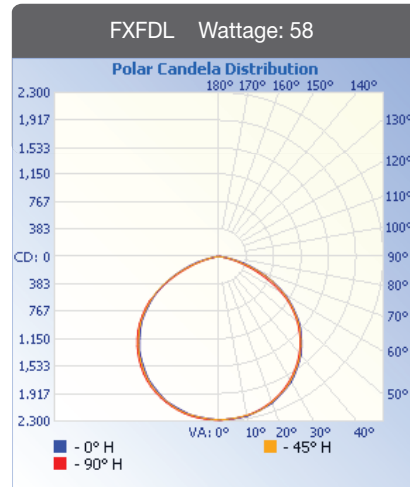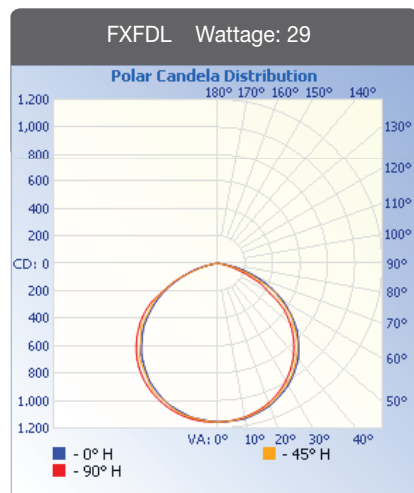

► Master Carton Package

