

natural^{led}

Turning Light into Savings ▶▶▶

LED TRADITIONAL (TWP)

28W, 40W,
60W, 90W



Key Features & Benefits

- ▶ DesignLights Consortium Certified
- ▶ Long Life LED Chips
- ▶ Uniform and consistent color
- ▶ Excellent thermal design
- ▶ 15-30 foot height performance
- ▶ Shatter-Resistant glass
- ▶ Universal Voltage 120-277V
- ▶ Operating Temp: -22°F~122°F
- ▶ 50,000 hrs rated average life
- ▶ Photocell sensor compatible

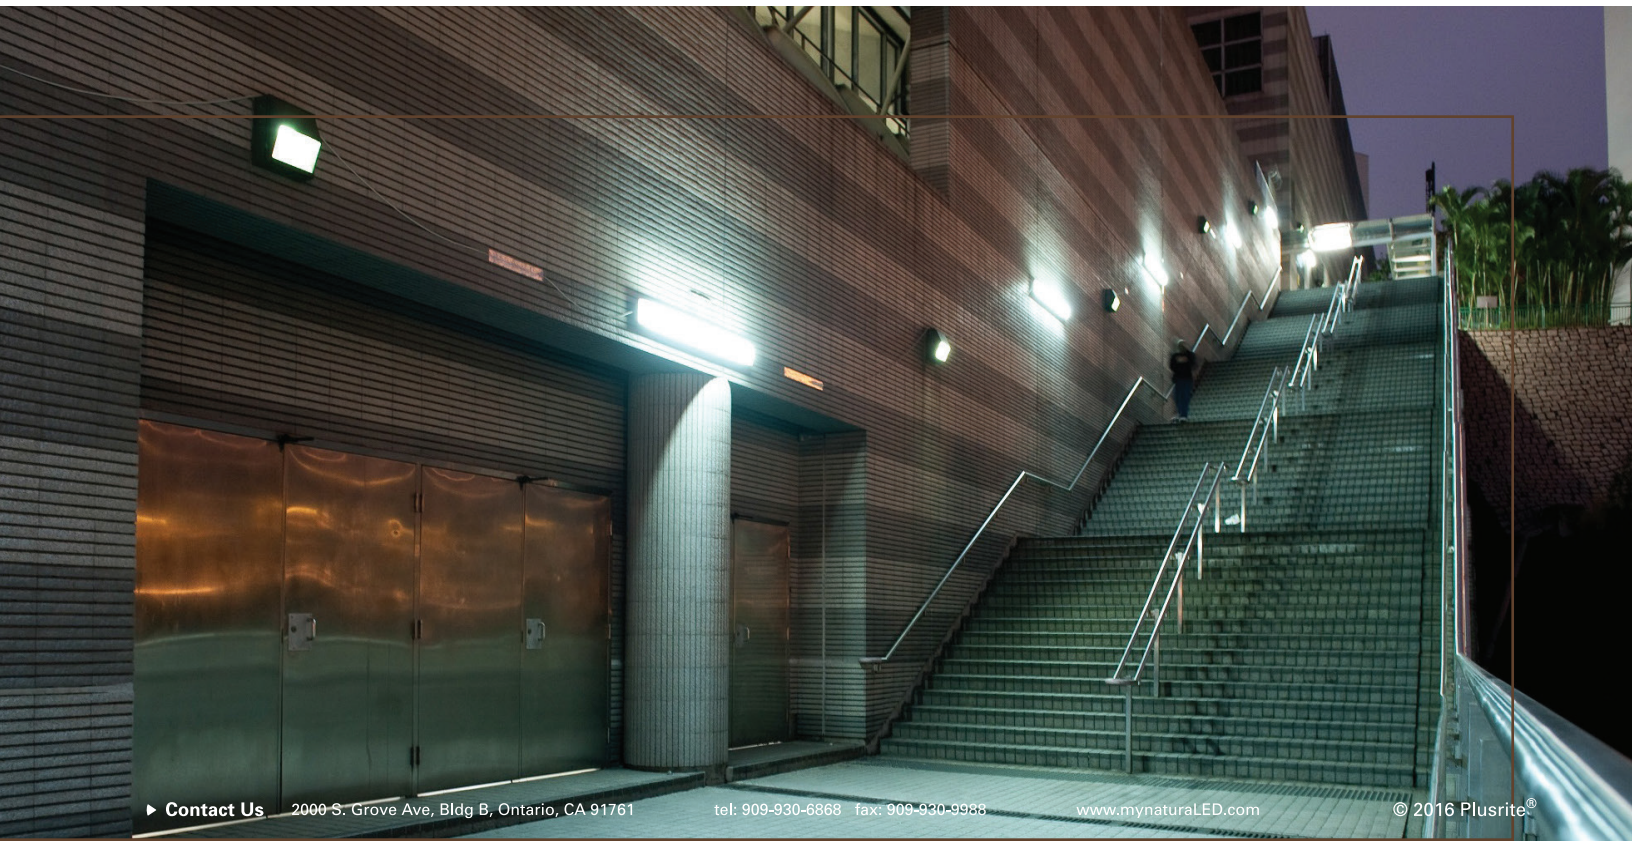

Applications

- ▶ Area Lighting
- ▶ Security Lighting
- ▶ Pathway Lighting
- ▶ Perimeter Lighting
- ▶ Entryway Lighting



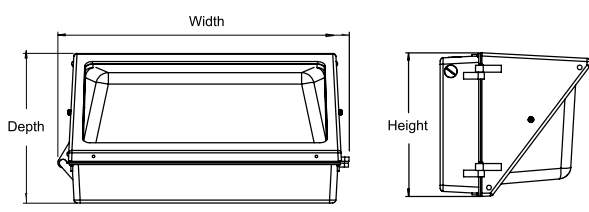
SHIELD INCLUDED

Requires shield for
DLC qualification





LED TRADITIONAL WALLPACK TWP

Dimensions

	LED	Width (in/mm)	Height (in/mm)	Depth (in/mm)	Weight (lbs)
	28W	8.75 / 220	7.25 / 185	9 / 230	5.75
	40W	14.5 / 363	9 / 230	7.5 / 188	9.5
	60W	18.5 / 463	9 / 230	9.25 / 239	16
	90W	18.5 / 463	9 / 230	9.25 / 239	18.60

Package

28W		Package (Master)	40W 60W 90W		Package (Master)
		1/2			1

Product Data

Item Code	Description	Wattage	CCT	Lumen Output	CRI	Equivalent Wattage	Finish	Beam Type	IP65 Rated	TITLE 24	DLC
7466	LED-FXTWP28/40K/DB	28W	4000K	3,000	70	100W	D.Bronze	F. Throw	●	●	●
7467	LED-FXTWP28/50K/DB	28W	5000K	3,000	70	100W	D.Bronze	F. Throw	●	●	●
7086	LED-FXTWP40/40K/DB	40W	4000K	3,025	80	100W	D.Bronze	F. Throw	●	●	●
7087	LED-FXTWP40/50K/DB	40W	5000K	3,043	80	100W	D.Bronze	F. Throw	●	●	●
7088	LED-FXTWP60/40K/DB	60W	4000K	4,593	80	150W	D.Bronze	F. Throw	●	●	●
7089	LED-FXTWP60/50K/DB	60W	5000K	4,596	80	150W	D.Bronze	F. Throw	●	●	●
7138	LED-FXTWP90/40K/DB	90W	4000K	6,125	80	250W	D.Bronze	F. Throw	●	●	●
7139	LED-FXTWP90/50K/DB	90W	5000K	6,550	80	250W	D.Bronze	F. Throw	●	●	●

*Please call the office for more details about our Photocell Sensor.



Visit www.mynaturalLED.com to download the installation guide or contact your sales rep for more information.