

120W LED

HID RETROFIT LAMP PROFESSIONAL

Equal to 400W HID

Life	50,000 hours
Energy rating	A+
Beam angle	360°
Supply volts	100-277V
Supply frequency	50/60Hz
CCT	2700-5700K
Power Factor	>0.9
CRI	>80
Lumen	14400lm
Dimming	Non dimmable
Dimensions	5.75" x 11.2"
Operational ambient	-40°C to 45°C



Samsung 5630



Rubycon




E39




JAE Connector

Type	Wattage	Voltage	Base Type	Driver	Color Temp
LED-HIDRL	120W=120W	UNV=120-277U	E39=E39	I=Internal R = Remote	2700K=2700K 3000K=3000K 3500K=3500K 4000K=4000K 4500K=4500K 5000K=5000K 5700K=5700K

Product Dimensions

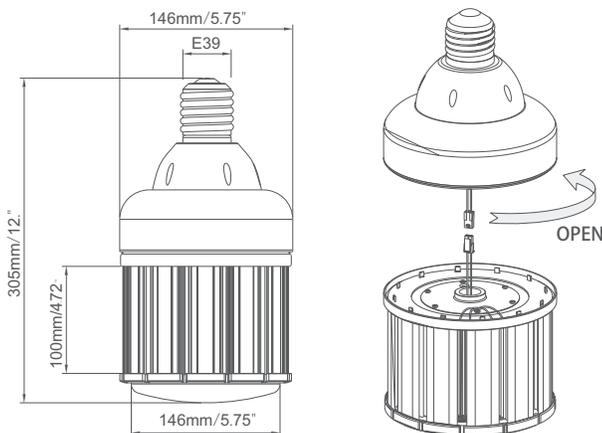


Light Distributions

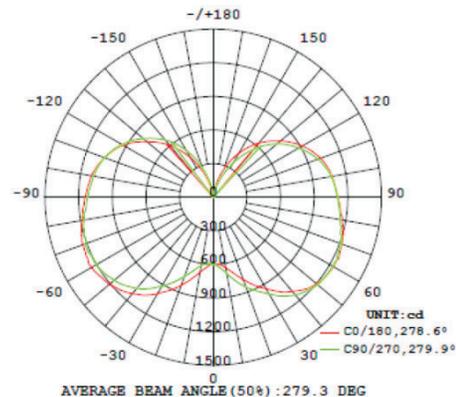


Wiring Diagrams

Replacing Self Ballasted CFL Lamp

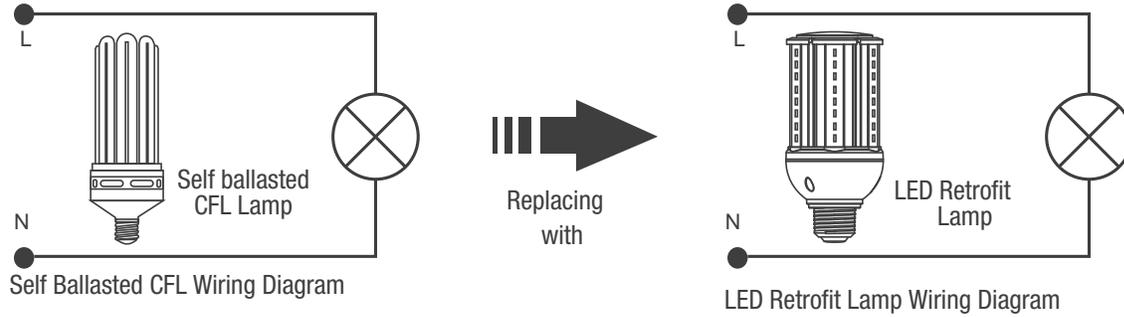

Replacing HPS/HID Lamp

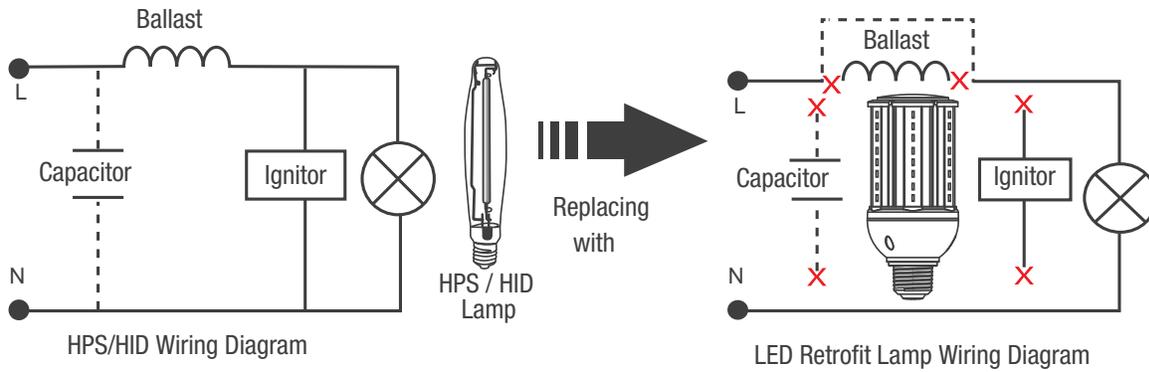

Cautions

- Mills HID retrofit lamps require 100V-277V input voltage.
- Mills HID retrofit lamps require all ballasts, capacitors, and starters to be bypassed/removed.
- Suitable for use in dry or damp locations only. Do not use where directly exposed to liquid, vapor, rain.
- This device is not intended for use with emergency exits.
- This device is not intended for use with dimmers or remote controls.
- This device is suitable for enclosed fixtures. MIN. lamp compartment dimensions (410)D X (390)H mm

Packings

Packing Details	
Pack Quantity	4pcs
Net Weight	4lbs/1828g
Gross Weight Per CTN	19.8lbs/9kg
Box Size	7.28*7.28*13.27"
CTN Size	15.16*15.16*14.06"

