



# LED Lamps - Plug-in



## SpectraChoice™ Type A 2-pin Plug-in

SpectraChoice™ Type A Plug-in lamps with Selectable CCT provide an easy solution to leverage the low energy and long life of LED. Simply plug the LED lamp into the existing fixture, no tools or re-wiring required.



**SpectraChoice™**

### PERFORMANCE HIGHLIGHTS:

SpectraChoice™ Type A 2-pin Plug-in Lamps	
<b>Light Output Range:</b>	1000-1100 Lumens
<b>CRI:</b>	80
<b>Selectable CCT:</b>	2700K, 3000K, 3500K & 4000K
<b>Efficiency:</b>	Up to 105 LPW
<b>Wattage:</b>	10.5W
<b>Life:</b>	50,000 hours L70
<b>Temperature Rating:</b>	-20°C to 40°C
<b>Location Rating:</b>	Damp

### FEATURES:

- Operates from magnetic ballasts
- Directional light output for improved fixture efficiency
- Lasts up to 4x longer than CFL
- These lamps are energy efficient, contain no lead or mercury and are compliant with material restriction requirements of RoHS


### BENEFITS:

#### Energy + Cost Savings

- For example, using only 10.5 watts of energy, save over \$40 in energy costs over the rated life of the lamp versus a standard 18-watt compact fluorescent lamp based on \$0.11 per kWh
- One lamp can replace many, greatly reducing inventory
- Use one lamp for applications requiring different CCTs, simplifying project management by streamlining BOMs
- Match color temperature across space with flip of a switch

### LIMITED WARRANTY

5 years



Select color temperature using built-in switch.

### LEARN MORE:

To learn more about saving money and energy, go to [www.LED.com](http://www.LED.com).



Selectable **LED Lamps**

### Do more with less.

- *Reduce Inventory*
- *Simplify Projects*
- *Optimize Solutions*



## SpectraChoice™ Type A 2-pin Plug-in

CUSTOMER NAME \_\_\_\_\_  
 PROJECT NAME \_\_\_\_\_  
 DATE \_\_\_\_\_ NOTES \_\_\_\_\_

### Selectable SpectraChoice™ Type A - 2-pin Plug-In Lamps

Bulb Shape	Base Type	Lamp Watts	Order Code	Description	Carton Qty <sup>2</sup>	MOL (In)	Lumens (Initial) <sup>5</sup>	Color Temp* (Initial)	CRI	Wattage Replacement	Rated Life L70 (Hrs) <sup>1</sup>	DLC <sup>4</sup>	Location Rating <sup>3</sup>	Additional Information <sup>^</sup>
<b>Vertical Type A G24d 2-pin</b>														
Plug-In	G24d	10.5	93300091	LED11G24d-V/8SC-4PK	24	6.2	1000	2700K	80	13/18/26	50,000	N/A	Damp	SpectraChoice™ Selectable Color Temperature (4000K Default), Requires Magnetic Ballast, Fully Enclosed, 4 pack
							1100	3000K						
							1100	3500K						
							1100	4000K						
<b>Horizontal Type A G24d 2-Pin</b>														
Plug-In	G24d	10.5	93300090	LED11G24d-H/8SC-4PK	24	6.6	1000	2700K	80	13/18/26	50,000	N/A	Damp	SpectraChoice™ Selectable Color Temperature (4000K Default), Requires Magnetic Ballast, Fully Enclosed, 4 pack
							1100	3000K						
							1100	3500K						
							1100	4000K						

Information provided is subject to change without notice. Please verify all details with Current. All values are design or typical values when measured under laboratory conditions, and Current makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

<sup>1</sup> The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)

<sup>2</sup> Minimum order quantity from Current - Carton Qty; Smaller unit of sale pack inside carton

<sup>3</sup> UL 1993 Environmental Requirements for LED LAMPS

Damp Location - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations


<sup>4</sup> DLC\* does not have a category for two-pin plug-in lamps.

<sup>5</sup> Lumen levels correspond with color temperature.


\* Default color temperature setting is 4000K.

<sup>^</sup> Check ballast compatibility at [LED.com/LED2pin-compatibility](http://LED.com/LED2pin-compatibility)

### LED G24d 2-pin Base

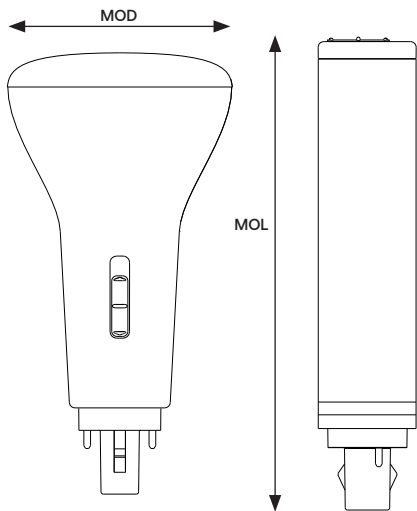


### Compact Fluorescent G24d 2-pin Bases

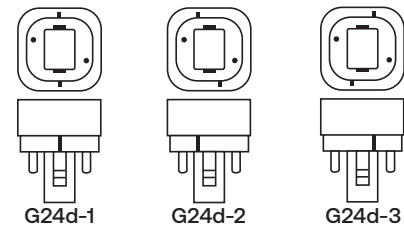

**Works in  
2-pin G24d  
Sockets**

### Vertical Configuration

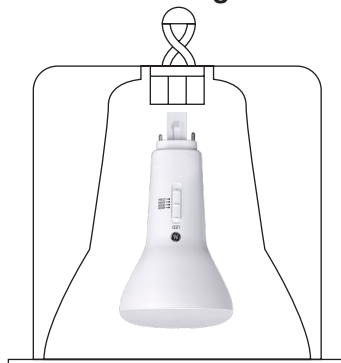

### Horizontal Configuration

