




Key Features & Benefits

- ▶ ENERGY STAR certified
- ▶ Direct replacement and instant on
- ▶ 80% energy savings compared to halogens
- ▶ Compatible with most dimmers*
- ▶ Contains no mercury or lead
- ▶ Rated 25,000 hours average life



Applications

- ▶ Museums
- ▶ Jewelry Stores
- ▶ Boutiques
- ▶ Restaurants
- ▶ Hotels

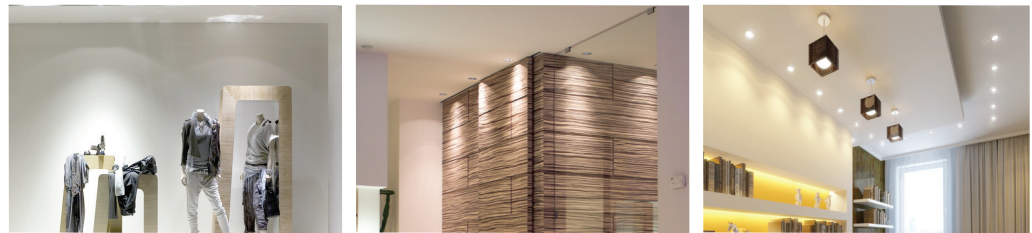


Energy Savings

LED Description	LED Life(hrs)	Equivalent Halogen	Halogen(hrs)	Savings in Energy Cost*
LED9.5PAR20	25,000	50 Watt	2,000	\$111
LED14PAR30	25,000	75 Watt	2,000	\$168
LED14PAR30L	25,000	75 Watt	2,000	\$168
LED20PAR38	25,000	100 Watt	2,000	\$220

Up to **80%**
Energy Savings

*Based on using LED bulb for 25,000 hrs at 11¢/kWh compared to equivalent lamp

Dimensions



LED	MOL (inch)	Diameter (inch)
PAR20	3.6	2.47
PAR30	3.62	3.74
PAR30L	4.49	3.74
PAR38	5.21	4.72

Beam Angle


25° / 40°



*Lamp may not be compatible with all dimmers. Please visit our website to find most up-to-date dimmer compatibility.





Item Code	Description	Color Temp	Lumen Output	Beam Angle	CBCP (cd)	Equiv. Wattage	CRI	Dimmable	
5754	LED9.5PAR20/50L/NFL/30K	3000K	500	25°	1748	50W	>80	Yes	●
5762	LED9.5PAR20/50L/FL/30K	3000K	500	40°	848	50W	>80	Yes	●
5755	LED9.5PAR20/50L/NFL/50K	5000K	500	25°	--	50W	>80	Yes	
5763	LED9.5PAR20/50L/FL/50K	5000K	500	40°	822	50W	>80	Yes	



5756	LED14PAR30/88L/NFL/30K	3000K	880	25°	3054	75W	>80	Yes	●
5764	LED14PAR30/80L/FL/30K	3000K	800	40°	1422	75W	>80	Yes	●
5757	LED14PAR30/90L/NFL/50K	5000K	900	25°	--	75W	>80	Yes	
5765	LED14PAR30/86L/FL/50K	5000K	860	40°	1845	75W	>80	Yes	




5758	LED14PAR30L/90L/NFL/30K	3000K	900	25°	3074	75W	>80	Yes	●
5766	LED14PAR30L/85L/FL/30K	3000K	850	40°	1414	75W	>80	Yes	●
5759	LED14PAR30L/90L/NFL/50K	5000K	900	25°	2939	75W	>80	Yes	
5767	LED14PAR30L/86L/FL/50K	5000K	860	40°	1735	75W	>80	Yes	



5760	LED20PAR38/116L/NFL/30K	3000K	1160	25°	4295	100W	>80	Yes	●
5768	LED20PAR38/111L/FL/30K	3000K	1110	40°	1948	75W	>80	Yes	●
5761	LED20PAR38/120L/NFL/50K	5000K	1200	25°	--	100W	>80	Yes	
5769	LED20PAR38/125L/FL/50K	5000K	1250	40°	--	75W	>80	Yes	

Package

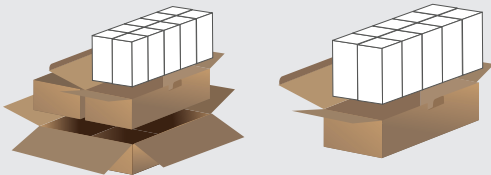

LED	Package (Inner/ Master)
PAR20	10 / 20
PAR30	10 / 20
PAR38	10

Warnings & Cautions

This device is not intended for use with emergency exit fixtures or emergency exit lights. Not for use where exposed to the weather or damp locations.

► Contact Us

2000 S. Grove Ave, Bldg B
Ontario, CA 91761

tel: 909-930-6868

fax: 909-930-9988

www.mynaturaLED.com