# LED T8 LINEAR TUBES — Plug-n-Play

- Direct replacement (Plug-n-Play)
- Full Glass Housing:
  No Aging/Yellowing, Bending
- Compatible with instant start, rapid start, programmed start and dimmable electronic ballasts
- Rated Life 50,000 hours
- By-Pass models also available
- Case Quantity: 25 pcs




| Ordering Code | Description | Watts (W) | MOL (in) | Lumens (lm) | Color Temp (K) | Beam Angle | CRI | Avg Life (hrs) |
|---|---|---|---|---|---|---|---|---|
| 64540-GEN | LED 9T8/24/830 DR | 9 | 24 | 1150 | 3000 | 220° | >80 | 50,000 |
| 64541-GEN | LED 9T8/24/835 DR | 9 | 24 | 1150 | 3500 | 220° | >80 | 50,000 |
| 64542-GEN | LED 9T8/24/840 DR | 9 | 24 | 1150 | 4000 | 220° | >80 | 50,000 |
| 64543-GEN | LED 9T8/24/850 DR | 9 | 24 | 1150 | 5000 | 220° | >80 | 50,000 |
| 64545-GEN | LED 11T8/36/830 DR | 11 | 36 | 1450 | 3000 | 220° | >80 | 50,000 |
| 64546-GEN | LED 11T8/36/835 DR | 11 | 36 | 1450 | 3500 | 220° | >80 | 50,000 |
| 64547-GEN | LED 11T8/36/840 DR | 11 | 36 | 1450 | 4000 | 220° | >80 | 50,000 |
| 64548-GEN | LED 11T8/36/850 DR | 11 | 36 | 1450 | 5000 | 220° | >80 | 50,000 |
| 64549-GEN | LED 12T8/48/830 DR | 12 | 48 | 1800 | 3000 | 220° | >80 | 50,000 |
| 64550-GEN | LED 12T8/48/835 DR | 12 | 48 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64551-GEN | LED 12T8/48/840 DR | 12 | 48 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64536-GEN | LED 12T8/48/850 DR | 12 | 48 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64553-GEN | LED 14T8/48/830 DR | 14 | 48 | 1800 | 3000 | 220° | >80 | 50,000 |
| 64552-GEN | LED 14T8/48/835 DR | 14 | 48 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64539-GEN | LED 14T8/48/840 DR | 14 | 48 | 1800 | 4000 | 220° | >80 | 50,000 |
| 64538-GEN | LED 14T8/48/850 DR | 14 | 48 | 1800 | 5000 | 220° | >80 | 50,000 |
| 64537-GEN | LED 17T8/48/830 DR | 17 | 48 | 2200 | 3000 | 220° | >80 | 50,000 |
| 64532-GEN | LED 17T8/48/835 DR | 17 | 48 | 2200 | 3500 | 220° | >80 | 50,000 |
| 64533-GEN | LED 17T8/48/840 DR | 17 | 48 | 2200 | 4000 | 220° | >80 | 50,000 |
| 64534-GEN | LED 17T8/48/850 DR | 17 | 48 | 2200 | 5000 | 220° | >80 | 50,000 |
| 64555-GEN | LED 24T8/96/830 DR | 24 | 96 | 3500 | 3000 | 220° | >80 | 50,000 |
| 64556-GEN | LED 24T8/96/835 DR | 24 | 96 | 3500 | 3500 | 220° | >80 | 50,000 |
| 64557-GEN | LED 24T8/96/840 DR | 24 | 96 | 3500 | 4000 | 220° | >80 | 50,000 |
| 64558-GEN | LED 24T8/96/850 DR | 24 | 96 | 3500 | 5000 | 220° | >80 | 50,000 |
| 64554-GEN | LED 35T8/96/830 DR | 33 | 96 | 4400 | 3000 | 220° | >80 | 50,000 |
| 64528-GEN | LED 35T8/96/835 DR | 33 | 96 | 4400 | 3500 | 220° | >80 | 50,000 |
| 64527-GEN | LED 35T8/96/840 DR | 33 | 96 | 4400 | 4000 | 220° | >80 | 50,000 |
| 64526-GEN | LED 35T8/96/850 DR | 33 | 96 | 4400 | 5000 | 220° | >80 | 50,000 |

Green Energy Lighting Corp

# LED T8 LINEAR TUBES — By-Pass

LISTED
E472081

CLASSIFIED
E472082

- Full Glass Housing:
  No Aging/Yellowing, Bending
- Voltage: 120-277V/347V
- Rated Life 50,000 hours
- Plug-n-Play models also available
- Case Quantity: 25 pcs




| Ordering Code | Description | Watts (W) | MOL (in) | Lumens (lm) | Color Temp (K) | Beam Angle | CRI | Avg Life (hrs) |
|---|---|---|---|---|---|---|---|---|
| 64496-GEN | LED 9T8/24/830 BP | 9 | 24 | 1150 | 3000 | 220° | >80 | 50,000 |
| 64497-GEN | LED 9T8/24/835 BP | 9 | 24 | 1150 | 3500 | 220° | >80 | 50,000 |
| 64498-GEN | LED 9T8/24/840 BP | 9 | 24 | 1150 | 4000 | 220° | >80 | 50,000 |
| 64499-GEN | LED 9T8/24/850 BP | 9 | 24 | 1150 | 5000 | 220° | >80 | 50,000 |
| 64500-GEN | LED 12T8/36/830 BP | 12 | 36 | 1450 | 3000 | 220° | >80 | 50,000 |
| 64501-GEN | LED 12T8/36/835 BP | 12 | 36 | 1450 | 3500 | 220° | >80 | 50,000 |
| 64502-GEN | LED 12T8/36/840 BP | 12 | 36 | 1450 | 4000 | 220° | >80 | 50,000 |
| 64503-GEN | LED 12T8/36/850 BP | 12 | 36 | 1450 | 5000 | 220° | >80 | 50,000 |
| 64504-GEN | LED 15T8/48/830 BP | 15 | 48 | 1800 | 3000 | 220° | >80 | 50,000 |
| 64505-GEN | LED 15T8/48/835 BP | 15 | 48 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64506-GEN | LED 15T8/48/840 BP | 15 | 48 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64507-GEN | LED 15T8/48/850 BP | 15 | 48 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64508-GEN | LED 18T8/48/830 BP | 18 | 48 | 2200 | 3000 | 220° | >80 | 50,000 |
| 64509-GEN | LED 18T8/48/835 BP | 18 | 48 | 2200 | 3500 | 220° | >80 | 50,000 |
| 64516-GEN | LED 18T8/48/840 BP | 18 | 48 | 2200 | 4000 | 220° | >80 | 50,000 |
| 64517-GEN | LED 18T8/48/850 BP | 18 | 48 | 2200 | 5000 | 220° | >80 | 50,000 |

Green Energy Lighting Corp

# LED T8 U-BEND — Plug-n-Play

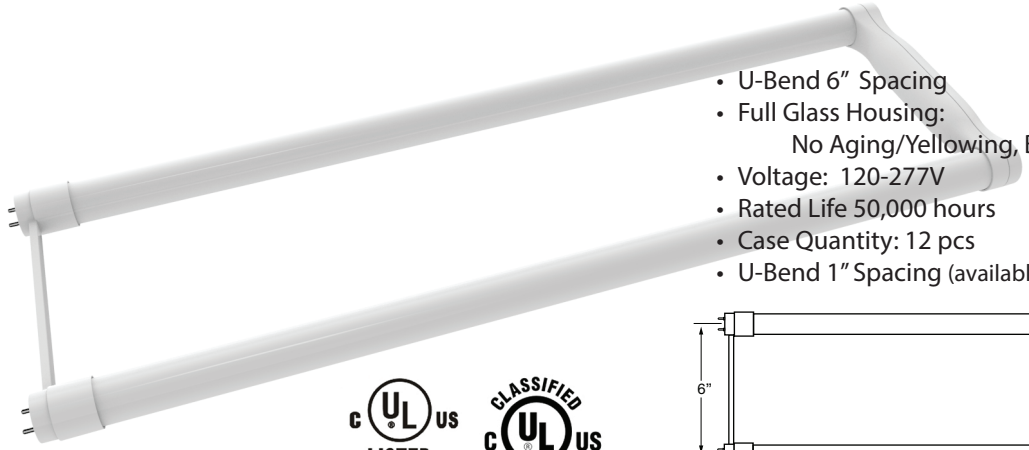

- U-Bend 6″ Spacing
- Full Glass Housing:
  No Aging/Yellowing, Bending
- Voltage: 120-277V
- Rated Life 50,000 hours
- Case Quantity: 12 pcs
- U-Bend 1″ Spacing (available Dec. 2015)

c UL us LISTED E472081

CLASSIFIED c UL us E472082

| Ordering Code | Description | Watts (W) | MOL (in) | Lumens (lm) | Color Temp (K) | Beam Angle | CRI | Avg Life (hrs) |
|---|---|---|---|---|---|---|---|---|
| 64568-GEN | LED 12T8/UBEND6/830 DR | 12 | 22.6 | 2200 | 3000 | 220° | >80 | 50,000 |
| 64567-GEN | LED 12T8/UBEND6/835 DR | 12 | 22.6 | 2200 | 3500 | 220° | >80 | 50,000 |
| 64566-GEN | LED 12T8/UBEND6/840 DR | 12 | 22.6 | 2200 | 4000 | 220° | >80 | 50,000 |
| 64565-GEN | LED 12T8/UBEND6/850 DR | 12 | 22.6 | 2200 | 5000 | 220° | >80 | 50,000 |
| 64564-GEN | LED 17T8/UBEND6/830 DR | 17 | 22.6 | 1800 | 3000 | 220° | >80 | 50,000 |
| 64563-GEN | LED 17T8/UBEND6/835 DR | 17 | 22.6 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64562-GEN | LED 17T8/UBEND6/840 DR | 17 | 22.6 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64561-GEN | LED 17T8/UBEND6/850 DR | 17 | 22.6 | 1800 | 3500 | 220° | >80 | 50,000 |
| 64576-GEN | *LED 12T8/UBEND1/830 DR | 12 | 22.6 | 1700 | 3000 | 220° | >80 | 50,000 |
| 64575-GEN | *LED 12T8/UBEND1/835 DR | 12 | 22.6 | 1700 | 3500 | 220° | >80 | 50,000 |
| 64574-GEN | *LED 12T8/UBEND1/840 DR | 12 | 22.6 | 1700 | 4000 | 220° | >80 | 50,000 |
| 64573-GEN | *LED 12T8/UBEND1/850 DR | 12 | 22.6 | 1700 | 5000 | 220° | >80 | 50,000 |
| 64572-GEN | *LED 17T8/UBEND1/830 DR | 17 | 22.6 | 2100 | 3000 | 220° | >80 | 50,000 |
| 64571-GEN | *LED 17T8/UBEND1/835 DR | 17 | 22.6 | 2100 | 3500 | 220° | >80 | 50,000 |
| 64570-GEN | *LED 17T8/UBEND1/840 DR | 17 | 22.6 | 2100 | 4000 | 220° | >80 | 50,000 |
| 64569-GEN | *LED 17T8/UBEND1/850 DR | 17 | 22.6 | 2100 | 5000 | 220° | >80 | 50,000 |

*Available December 2015

Green Energy Lighting Corp