

LED T8 LINEAR TUBES — Plug-n-Play



- Direct replacement (Plug-n-Play)
- Full Glass Housing:
No Aging/Yellowing, Bending
- Compatible with instant start, rapid start, programmed start and dimmable electronic ballasts
- Rated Life 50,000 hours
- By-Pass models also available
- Case Quantity: 25 pcs



Ordering Code	Description	Watts (W)	MOL (in)	Lumens (lm)	Color Temp (K)	Beam Angle	CRI	Avg Life (hrs)
64540-GEN	LED 9T8/24/830 DR	9	24	1150	3000	220°	>80	50,000
64541-GEN	LED 9T8/24/835 DR	9	24	1150	3500	220°	>80	50,000
64542-GEN	LED 9T8/24/840 DR	9	24	1150	4000	220°	>80	50,000
64543-GEN	LED 9T8/24/850 DR	9	24	1150	5000	220°	>80	50,000
64545-GEN	LED 11T8/36/830 DR	11	36	1450	3000	220°	>80	50,000
64546-GEN	LED 11T8/36/835 DR	11	36	1450	3500	220°	>80	50,000
64547-GEN	LED 11T8/36/840 DR	11	36	1450	4000	220°	>80	50,000
64548-GEN	LED 11T8/36/850 DR	11	36	1450	5000	220°	>80	50,000
64549-GEN	LED 12T8/48/830 DR	12	48	1800	3000	220°	>80	50,000
64550-GEN	LED 12T8/48/835 DR	12	48	1800	3500	220°	>80	50,000
64551-GEN	LED 12T8/48/840 DR	12	48	1800	3500	220°	>80	50,000
64536-GEN	LED 12T8/48/850 DR	12	48	1800	3500	220°	>80	50,000
64553-GEN	LED 14T8/48/830 DR	14	48	1800	3000	220°	>80	50,000
64552-GEN	LED 14T8/48/835 DR	14	48	1800	3500	220°	>80	50,000
64539-GEN	LED 14T8/48/840 DR	14	48	1800	4000	220°	>80	50,000
64538-GEN	LED 14T8/48/850 DR	14	48	1800	5000	220°	>80	50,000
64537-GEN	LED 17T8/48/830 DR	17	48	2200	3000	220°	>80	50,000
64532-GEN	LED 17T8/48/835 DR	17	48	2200	3500	220°	>80	50,000
64533-GEN	LED 17T8/48/840 DR	17	48	2200	4000	220°	>80	50,000
64534-GEN	LED 17T8/48/850 DR	17	48	2200	5000	220°	>80	50,000
64555-GEN	LED 24T8/96/830 DR	24	96	3500	3000	220°	>80	50,000
64556-GEN	LED 24T8/96/835 DR	24	96	3500	3500	220°	>80	50,000
64557-GEN	LED 24T8/96/840 DR	24	96	3500	4000	220°	>80	50,000
64558-GEN	LED 24T8/96/850 DR	24	96	3500	5000	220°	>80	50,000
64554-GEN	LED 35T8/96/830 DR	33	96	4400	3000	220°	>80	50,000
64528-GEN	LED 35T8/96/835 DR	33	96	4400	3500	220°	>80	50,000
64527-GEN	LED 35T8/96/840 DR	33	96	4400	4000	220°	>80	50,000
64526-GEN	LED 35T8/96/850 DR	33	96	4400	5000	220°	>80	50,000

LED T8 LINEAR TUBES — By-Pass




- Full Glass Housing:
No Aging/Yellowing, Bending
- Voltage: 120-277V/347V
- Rated Life 50,000 hours
- Plug-n-Play models also available
- Case Quantity: 25 pcs



Ordering Code	Description	Watts (W)	MOL (in)	Lumens (lm)	Color Temp (K)	Beam Angle	CRI	Avg Life (hrs)
64496-GEN	LED 9T8/24/830 BP	9	24	1150	3000	220°	>80	50,000
64497-GEN	LED 9T8/24/835 BP	9	24	1150	3500	220°	>80	50,000
64498-GEN	LED 9T8/24/840 BP	9	24	1150	4000	220°	>80	50,000
64499-GEN	LED 9T8/24/850 BP	9	24	1150	5000	220°	>80	50,000
64500-GEN	LED 12T8/36/830 BP	12	36	1450	3000	220°	>80	50,000
64501-GEN	LED 12T8/36/835 BP	12	36	1450	3500	220°	>80	50,000
64502-GEN	LED 12T8/36/840 BP	12	36	1450	4000	220°	>80	50,000
64503-GEN	LED 12T8/36/850 BP	12	36	1450	5000	220°	>80	50,000
64504-GEN	LED 15T8/48/830 BP	15	48	1800	3000	220°	>80	50,000
64505-GEN	LED 15T8/48/835 BP	15	48	1800	3500	220°	>80	50,000
64506-GEN	LED 15T8/48/840 BP	15	48	1800	4000	220°	>80	50,000
64507-GEN	LED 15T8/48/850 BP	15	48	1800	5000	220°	>80	50,000
64508-GEN	LED 18T8/48/830 BP	18	48	2200	3000	220°	>80	50,000
64509-GEN	LED 18T8/48/835 BP	18	48	2200	3500	220°	>80	50,000
64516-GEN	LED 18T8/48/840 BP	18	48	2200	4000	220°	>80	50,000
64517-GEN	LED 18T8/48/850 BP	18	48	2200	5000	220°	>80	50,000

LED T8 U-BEND — Plug-n-Play

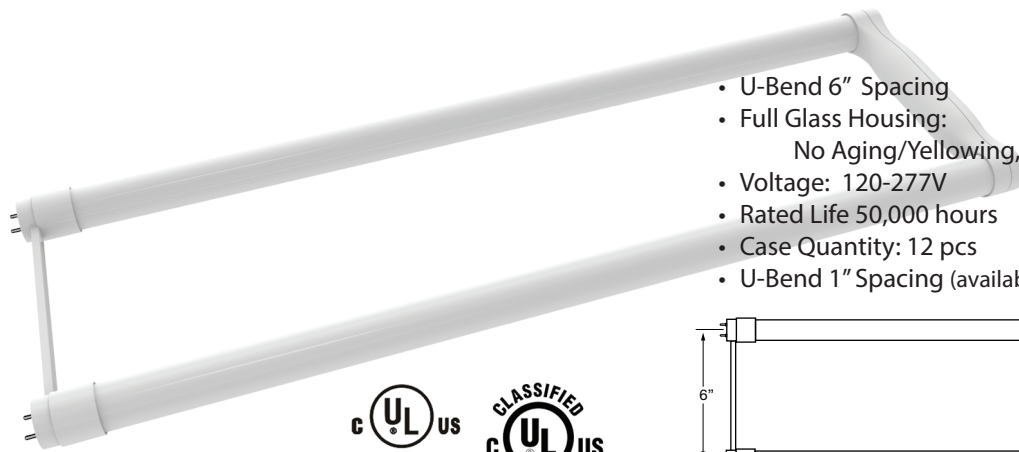

- U-Bend 6" Spacing
- Full Glass Housing:
No Aging/Yellowing, Bending
- Voltage: 120-277V
- Rated Life 50,000 hours
- Case Quantity: 12 pcs
- U-Bend 1" Spacing (available Dec. 2015)



Ordering Code	Description	Watts (W)	MOL (in)	Lumens (lm)	Color Temp (K)	Beam Angle	CRI	Avg Life (hrs)
64568-GEN	LED 12T8/UBEND6/830 DR	12	22.6	2200	3000	220°	>80	50,000
64567-GEN	LED 12T8/UBEND6/835 DR	12	22.6	2200	3500	220°	>80	50,000
64566-GEN	LED 12T8/UBEND6/840 DR	12	22.6	2200	4000	220°	>80	50,000
64565-GEN	LED 12T8/UBEND6/850 DR	12	22.6	2200	5000	220°	>80	50,000
64564-GEN	LED 17T8/UBEND6/830 DR	17	22.6	1800	3000	220°	>80	50,000
64563-GEN	LED 17T8/UBEND6/835 DR	17	22.6	1800	3500	220°	>80	50,000
64562-GEN	LED 17T8/UBEND6/840 DR	17	22.6	1800	3500	220°	>80	50,000
64561-GEN	LED 17T8/UBEND6/850 DR	17	22.6	1800	3500	220°	>80	50,000
64576-GEN	*LED 12T8/UBEND1/830 DR	12	22.6	1700	3000	220°	>80	50,000
64575-GEN	*LED 12T8/UBEND1/835 DR	12	22.6	1700	3500	220°	>80	50,000
64574-GEN	*LED 12T8/UBEND1/840 DR	12	22.6	1700	4000	220°	>80	50,000
64573-GEN	*LED 12T8/UBEND1/850 DR	12	22.6	1700	5000	220°	>80	50,000
64572-GEN	*LED 17T8/UBEND1/830 DR	17	22.6	2100	3000	220°	>80	50,000
64571-GEN	*LED 17T8/UBEND1/835 DR	17	22.6	2100	3500	220°	>80	50,000
64570-GEN	*LED 17T8/UBEND1/840 DR	17	22.6	2100	4000	220°	>80	50,000
64569-GEN	*LED 17T8/UBEND1/850 DR	17	22.6	2100	5000	220°	>80	50,000

*Available December 2015

