


brighten

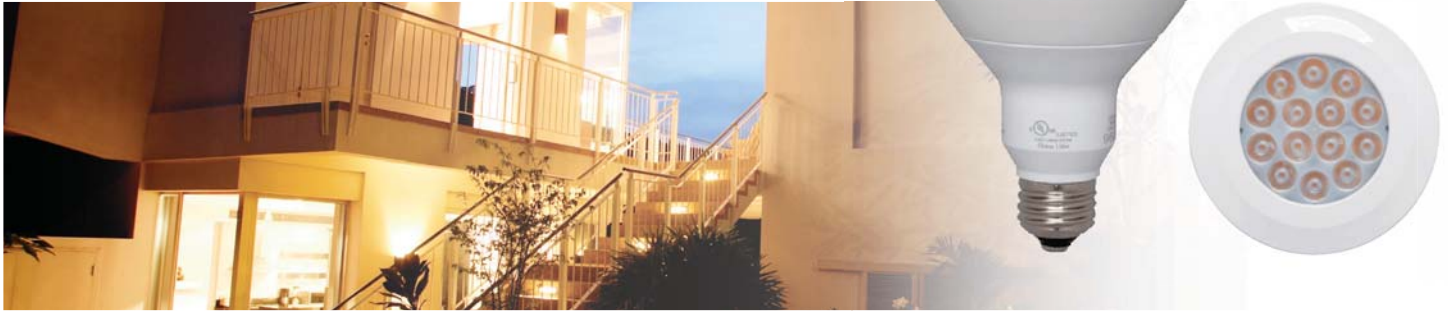

The bright white radiance of GE's LED commercial indoor/outdoor PAR38 lamps isn't just something you see, it's something you feel.

LED commercial indoor/outdoor PAR38 lamps

For indoor and outdoor applications, GE offers a multitude of wattage options with a high light output.

LOW-COST OPERATION

- For example, using only 26 watts of energy, save over \$517 in energy costs over the rated life of the lamp versus a standard 120-watt halogen lamp based on \$0.11 per kWh
- Energy efficiency and long life mean fewer lamp replacements versus standard incandescent and halogen light sources
- Ideal for both indoor and outdoor applications
- UL wet rated for outdoor applications

EXCELLENT COLOR RENDERING

- Available with a CRI of 82 - 84

COLOR TEMPERATURE

- Halogen-like color
- Available in 2700K, 3000K and 4000K

LONG LIFE

- Up to 50,000 hours rated life (L70)

DIMMABLE

- Dims from 100% to 10%

BEAM PATTERNS

- Available in 12°, 15°, 25°, 35° and 40° beam patterns

ENVIRONMENTALLY CONSCIOUS

- These lamps are energy efficient and contain no lead or mercury

GE QUALITY AND RELIABILITY

- 3-year limited warranty

To learn more about saving money and energy, go to: gelighting.com/ThinkLED

When you Think LED lighting, Think GE.

ecomaginationSM



imagination at work

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

LED commercial indoor/outdoor PAR38 lamps

Directional Lamps (PAR)

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (In)	Lumens Initial	CBCP	Initial Color Temp	CRI	Wattage Equivalent	*Rated Life L70 (Hrs)	Dimmable	ENERGY STAR® Status	#Location Rating	Additional Information	
Commercial PAR38 (Indoor/Outdoor)																		
	MED	12	66111	LED12DP38S830/12	120	6	5.31	700	10000	3000	82	70W	25,000	Yes	★	Damp	Spot, 12° beam, Silver	
			66114	LED12DP38S827/12	120	6	5.31	660	10000	2700	82	70W	25,000	Yes	★	Damp	Spot, 12° beam, Silver	
			90150	LED12DP382W83025	120	6	5.12	950	4400	3000	84	85W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White	
			90151	LED12DP382W83035	120	6	5.12	950	2700	3000	84	85W	25,000	Yes	★	Wet	Flood, 35° beam, White	
			90132	LED12DP382W82725	120	6	5.12	850	4000	2700	84	85W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White	
			90133	LED12DP382W82735	120	6	5.12	850	2500	2700	84	85W	25,000	Yes	★	Wet	Flood, 35° beam, White	
		18	90159	LED18DP38W830/25	120	6	5.12	1300	7600	3000	84	100W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White	
			90160	LED18DP38W830/40	120	6	5.12	1300	2400	3000	84	100W	25,000	Yes	★	Wet	Flood, 40° beam, White	
			90154	LED18DP38W827/25	120	6	5.12	1200	7000	2700	84	100W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White	
			94453	LED18DP38W827/40	120	6	5.12	1200	2200	2700	84	100W	25,000	Yes	★	Wet	Flood, 40° beam, White	
		90162	LED18DP38W840/25	120	6	5.12	1400	8200	4000	84	100W	25,000	Yes	★	Wet	Narrow Flood, 25° beam, White		
		90163	LED18DP38W840/40	120	6	5.12	1400	2600	4000	84	100W	25,000	Yes	★	Wet	Flood, 40° beam, White		
		22235	LED18DP38FL5K/TP	120	3	5.12	1500	3200	5000	84	100W	25,000	Yes	★	Wet	Flood, 40° beam, White		
	20	68197	LED20DP38V827/12	120	6	5.1	1000	14000	2700	82	100W	25,000	Yes	★	Wet	Spot, 12° beam, Silver		
		68200	LED20DP38V840/12	120	6	5.1	1200	17000	4000	82	100W	25,000	Yes	★	Wet	Spot, 12° beam, Silver		
		MED	26	68183	LED26DP38S830/12	120	6	5.31	1500	24000	3000	82	130W	50,000	Yes	★	Wet	Spot, 12° beam, Silver
				68184	LED26DP38S830/25	120	6	5.31	1500	6800	3000	82	130W	50,000	Yes	★	Wet	Narrow Flood, 25° beam, Silver
68185				LED26DP38S830/40	120	6	5.31	1500	3100	3000	82	120W	50,000	Yes	★	Wet	Flood, 40° beam, Silver	
68182				LED26DP38S840/40	120	6	5.31	1650	3200	4000	82	120W	50,000	Yes	★	Wet	Flood, 40° beam, Silver	
33647				LED26DP38S835/12	120	6	5.31	1900	31,000	3500	82	160W	25,000	Yes		Wet	Spot, 12° beam, Silver	
70591				LED26DP38S835/40	120	6	5.31	1900	4,000	3500	82	160W	25,000	Yes		Wet	Flood, 40° beam, Silver	
15139	LED28P38S830/15			120	6	5.31	2400	20,000	3000	82	130W	25,000	-		Dry	Spot, 15° beam, Silver		

Get more information at
GELighting.com/ThinkLED

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

★ ENERGY STAR® status: Certified as meeting ENERGY STAR® guidelines.

UL 1993 Environmental Requirements for LED LAMPS

Location, damp – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.

Location, dry – Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet – Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.

^ Incandescent or Halogen wattage equivalencies based on ENERGY STAR® guidelines using lumens or CBCP according to lamp type



Product is compliant with material restriction requirements of RoHS

ENERGY STAR® and the ENERGY STAR® logo are registered U.S. marks

ecomaginationSM

