



23105 Kashiwa Court, Torrance, CA 90505  
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424  
E-mail: info@ledtronics.com  
Website: http://www.ledtronics.com

# LED20T6-4WDCB-XCW-1030V

Compact LED T6 Tube Bulb, Ba15D Base  
10~30Vdc, Cool White, 6000K  
Angle of illumination: 320°



DWG BY:  
SHE / GP  
06-02-21

R&D:  
UF  
06-02-21

MFG:  
LD  
06-02-21

QA:  
SB  
06-02-21

REVISION LTR: PRELIMINARY  
  
06-02-21



○ **Features**

Operating Temperature	-30°C to +50°C
Base Material	Nickel Plated Brass
LED Type / Qty.	SMD5050 / 27 pcs.
LED LM80 Report	-
LM79 Report	-
Lifespan	15,000 hrs.
Dimmable	No
Warranty	3 Years
Weight	0.025 lbs / 0.4 oz

 ○ **Electro-Optical Characteristics**

Part Number	LED20T6-4WDCB-XCW-1030V	
Input Voltage (typ)	10Vdc	30Vdc
Tested @ (Voltage)	10Vdc	30Vdc
Power Consumption	1.8W	1.9W
Current Consumption	0.165 A	0.063 A
Efficacy: (Lm/W)	-	-
Lumens	219 lm	234 lm
Luminous Intensity	22308mcd	21541mcd
SCP	17	19
Power Factor	-	-
CRI (Ra)	85	
CCT	6000K	
Color	Cool White	
Angle of illumination	320°	

○ **Dimensions**

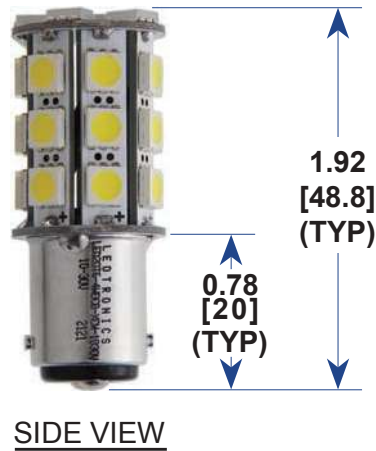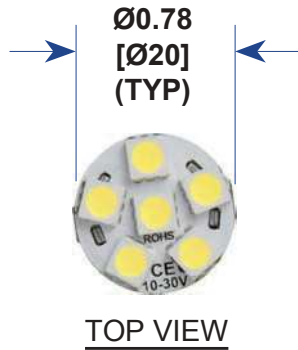

**Tolerance:**

XXX +/- .010

XX +/- .025

**Note:**

1. All Dimensions are in Inches [Millimeters].