

# LED Tubes

## Refit Solutions from GE



### Description

Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time. Each LED tube is outfitted with a GE Lightech™ driver. *See reverse for LED tubes and Lightech driver product details.*

### Features

- 4' tubes
- 2,100 to 2,200 lumen options available
- 100-105 total system lumens per watt (LPW)
- Choice of three color temperatures (3500°K, 4000°K, 5000°K)
- 50,000-hour rated life
- UL-approved technologies – in compliance with UL 1598 certification

### Savings Breakdown


Save 61% in energy costs compared to standard T8 (4-lamp) light fixtures.\*

*\*Two LED Tubes – 4,200 Lumens,  
Four-Lamp T12 System – 6,600 Lumens*

### LED Tubes Ranking among Complete Refit Solutions Portfolio

	GOOD	BETTER	BEST
Initial Acquisition Costs		✓	
Installation Time/Cost			✓
Energy Costs			✓
Total Life Cycle Costs			✓
Light Distribution/Aesthetics	✓		

### Cumulative Energy Costs

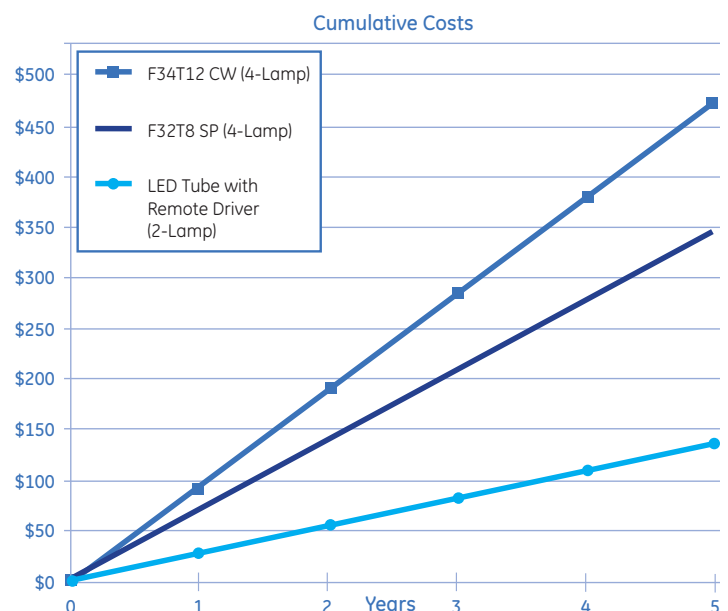

*Savings calculations are based on energy costs using \$0.11 per kWh and 16 hours of daily operation.*

## Product Specifications

### Refit LED Tubes

Product Code	Description	Bulb Shape	Base	Watts	Case Qty	Length (in)	Initial Lumens	Color Temp (°K)	CRI	Rated Life (L70)
94381	LED21T8/4/835	T8	Medium Bi-Pin (G13)	18	10	48	2100	3500	80	50,000
94382	LED21T8/4/840	T8	Medium Bi-Pin (G13)	18	10	48	2100	4000	80	50,000
94383	LED21T8/4/850	T8	Medium Bi-Pin (G13)	18	10	48	2100	5000	80	50,000

### Lichtech Drivers

Product Code	Description	Number of Lamps
94384	LED21T8/DR/1L	1
94385	LED21T8/DR/2L	2

### General Characteristics

Product Code	94384	94385
Output Current (A)	0.62	0.62*2
Input Wattage Range (W)	21	42
Input Voltage (V)	120-277V	
Input Frequency (Hz)	50/60Hz	
Efficiency (%)	85	
Output Type	DC	
Output Voltage Range	27-33V	
Dimmability	No	
Ambient Temperature Min	-4°F	
Ambient Temperature Max	104°F	
Case Temperature	158°F	

### Dimensions

Product Code	94384	94385
Weight	1.01	1.08
Casing Length (in)	9.5	
Casing Width (in)	1.3	
Casing Height (in)	1	
Lead Exit Length (in)	26	
Input Wire Length (in)	36	
Output Wire Length (in)	38	



imagination at work