



LED PAR30 CFL Replacement Lamp, UL Listed

Only 12 Watts, Replaces CFL up to 32W – 90 to 290VAC – 3000K or 4000K White



FEATURES

- 3 Year LEDtronics Warranty
- Direct Replacement with Simple Ballast Bypass
- 4 Pin / G24Q Universal Base for Ceiling Canister Lighting with G24Q1, G24Q2, G24Q3 Sockets
- Energy Savings of up to 70% over CFLs
- Lumen Maintenance over 70% @ 50,000+ Hrs
- No Mercury, No Lead – ROHS Compliant
- No UV, No IR / No RF Interference / No Heat
- High 82 CRI
- Solid-State: High Shock & High Vibration Resistant
- UL/cUL Listed: E358356
- Option: Other Color Temps. Available for Volume Quantities

APPLICATIONS

- Ceiling Can Lights in Commercial Buildings
- Down Lights in Offices, Shops, Stores & Homes
- Wall Sconces & Lanterns
- Floodlight / Security Light / Step Lighting
- Accent & Display Lighting
- Museum, Theater Effect Lighting

30 Years of LEDtronics Design, Engineering & Manufacturing Experience



4 Pin G24QU Base



Not for Use with Dimmers

CFL Replacement up to 32 Watts

LED30G24QU-12W-XIW-001M (Warm White)
LED30G24QU-12W-XWW-001M (Natural White)

	WARM WHITE	NATURAL WHITE
Color Temperature	3000K~3200K	4000K~4300K
Input Voltage	90~290 VAC (Tested @ 120VAC)	
Input Power	12 Watts	
Total Lumens	495 lm	525 lm
Efficacy	40 lm/W	45 lm/W
Max. Candela	850 cd	900 cd
Power Factor	0.71	0.63
Beam Angle	40°	
CRI	82	
Heatsink	Aluminum / White	
Lens	UV-Stabilized Plastic	
Base Style	G24Q 4-Pin Universal	
Body Color	White	
Operating Temp.	-22°F ~+122°F / -30°C ~+50°C	
Dimensions	L3.7 x WØ3.75 in. / L94 x WØ95 mm	
Weight	0.5625 lbs / 283.5 g	



LEDTRONICS®

Creating the Future of LED Light Since 1983™



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com

© 2014 LEDtronics, Inc.

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

LEDTRONICS.COM


WWW.LEDTRONICS.COM

LOG 393 / Rev 09-2014

Check LEDTRONICS.COM for latest data. Printed material may be outdated.

PHOTOMETRIC REPORT:

LED30G24QU-12W-XIW-001M

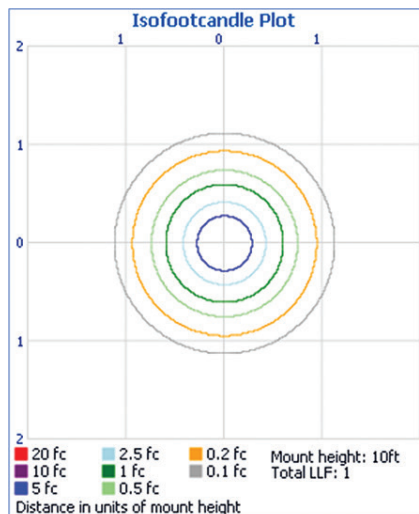


Filename: LED30G24QU-12W-XIW-001M
Manufacturer: LEDTRONICS
Luminaire: PRISMATIC LENS, 120VAC, 12.2W
Luminaire Cat: LED30G24QU-12W-XIW-001M
Lamp: LUMEN RATING: 495.2Lms.
Lamp Output: 1 lamp(s), rated Lumens/lamp: 495.2
Max Candela: 850.0 at Horizontal: 0°, Vertical: 0°
Luminous Opening: Point
Test: 5-23-11

Illuminance at a Distance


	Center Beam FC	Beam Width
1.7ft	306.00 fc	1.2ft
3.3ft	76.50 fc	2.4ft
5.0ft	34.00 fc	3.5ft
6.7ft	19.13 fc	4.7ft
8.3ft	12.24 fc	5.9ft
10.0ft	8.50 fc	7.1ft

■ Beam Spread: 39.1°

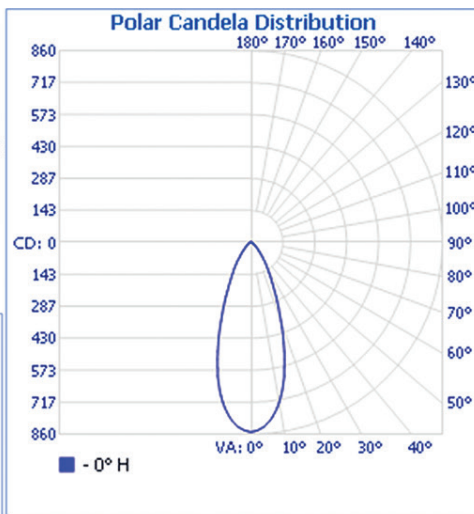

PHOTOMETRIC REPORT:

LED30G24QU-12W-XWW-001M

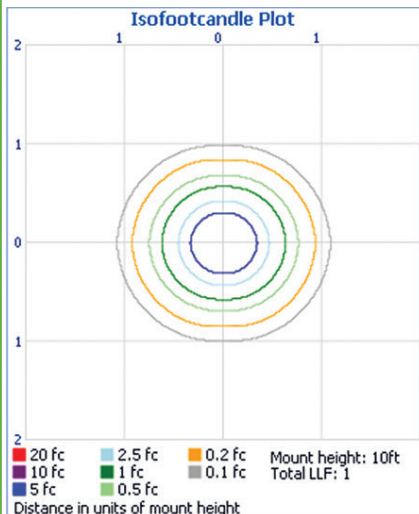

Filename: LED30G24QU-12W-XWW-001M
Manufacturer: LEDTRONICS
Luminaire: CLEAR LENS, 120VAC, 12.0W
Luminaire Cat: LED30G24QU-12W-XWW-001M
Lamp: LUMEN RATING: 524.6Lms.
Lamp Output: 1 lamp(s), rated Lumens/lamp: 524.6
Max Candela: 899.0 at Horizontal: 0°, Vertical: 0°
Luminous Opening: Point
Test: 10-10-11

Illuminance at a Distance

	Center Beam FC	Beam Width
1.7ft	323.64 fc	1.2ft 1.3ft
3.3ft	80.91 fc	2.4ft 2.7ft
5.0ft	35.96 fc	3.6ft 4.0ft
6.7ft	20.23 fc	4.8ft 5.4ft
8.3ft	12.95 fc	6.0ft 6.7ft
10.0ft	8.99 fc	7.3ft 8.0ft

■ Vert. Spread: 39.9° ■ Horiz. Spread: 43.8°

