



23105 Kashiwa Court, Torrance, CA 90505  
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424  
E-mail: [webmaster@ledtronics.com](mailto:webmaster@ledtronics.com)  
Website: <http://www.ledtronics.com>

# LED40BU-60WE26-XxW-101 (SERIES)

LED Conical Acorn Lamp, Base Up, E26 Base  
100~277Vac, 320° Omnidirectional

Warm White(3000K), Natural White(4000K), Pure White(5000K)



DWG BY:  
BB / GP  
08-31-16

R&D:  
UF / KS  
10-31-18

MFG:  
LD  
10-31-18

QA:  
EE  
10-31-18

REVISION LTR: A  
ECR#: 102918-UF02  
10-30-18

### ○ Features



Operating Temperature	-40°C to +50°C
Heatsink Temperature	35°C
Heatsink Material / Color	Aluminum / Silver
Sleeve Material / Color	Polycarbonate / White - Lime Green
UL / cUL Listed	E322319 (LED40BU-60WE26)
LED LM80 Report	Yes
LM79 Report	Yes
LED type	Epistar SMD
Dimmable	No
Lifespan	50,000 hrs.
Warranty	5 Years
Weight	1.54 lbs.



### ○ Electro-Optical Characteristics

Part Number	LED40BU-60WE26-XIW-101	LED40BU-60WE26-XWW-101	LED40BU-60WE26-XPW-101
Input Voltage (typ)	100~277Vac	100~277Vac	100~277Vac
Tested @ (Voltage)	120Vac	120Vac	120Vac
Power Consumption	57.15W	57.09W	57.13W
Current Consumption	0.480 A	0.480 A	0.490 A
Efficacy: (Lm/W)	96.355	97.668	98.123
Lumens	5506.69 lm	5575.87 lm	5605.77 lm
Max Ft-Cd	1055 cd	1160 cd	1195 cd
Power Factor	0.92	0.99	1
CRI (Ra)	81.7	82.4	82.6
CCT	3000K	4000K	5000K
Color	Warm White	Natural White	Pure White
Angle of illumination	320° Omnidirectional		

○ **Dimensions**

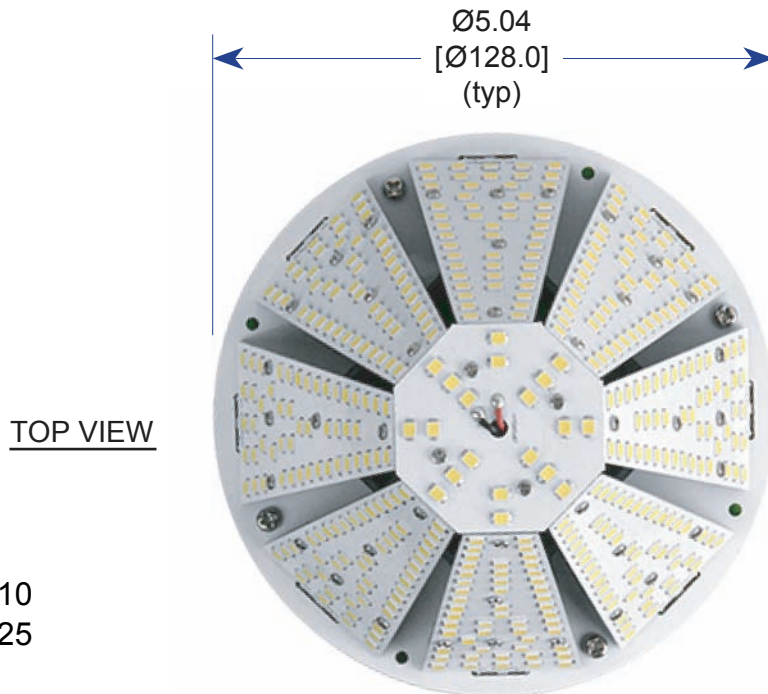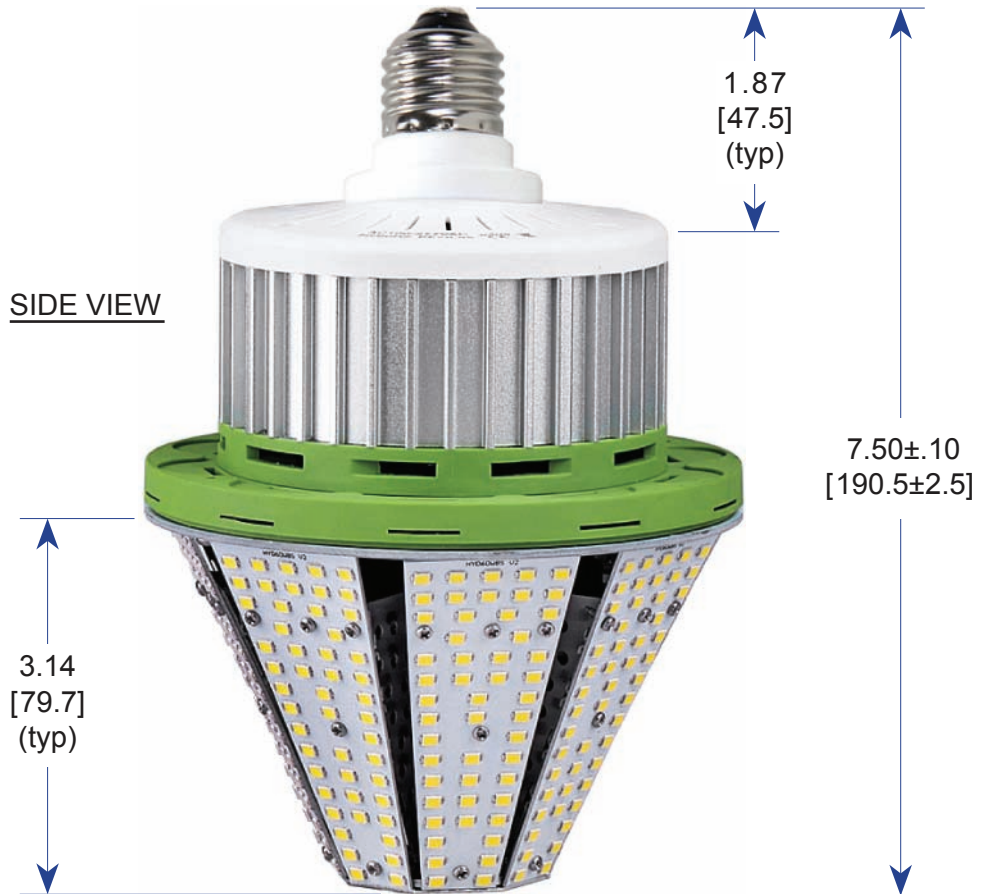

**Tolerance:**  
XXX +/- .010  
XX +/- .025

**Notes:**  
1. All Dimensions are in Inches [Millimeters].