



LED T8 Composite Tube Lights

UL – 2 ft/10 Watts or 4 ft/18 Watts – Clear or Frosted Lens – 100~277VAC – 2 Pin / G13 Base



FEATURES

- 5 Year LEDtronics Limited Warranty
- Direct Retrofit into Fluorescent T8/T12 Fixtures 2 or 4 Ft
- Energy Savings of up to 50%
- Lumen Maintenance over 70% @ 50,000+ Hours
- Even Lighting, No Buzzing, No Flickering
- No UV/IR Radiation, No RF Interference
- UL/cUL Classified (E335951 / T8-F06B-10W)
- No Toxic Mercury - RoHS Compliant
- LM79 & LM80 Reports Available

APPLICATIONS

- Office Lighting
- Production Area
- Warehouse Lighting
- Coolers, Freezers & Damp Locations
- Retail Store Display Lighting
- Transportation
- Undercabinet Lighting
- General & Street Sign Backlighting

AVAILABLE OPTIONS


- Other Tube Lengths
- Other Color Temperatures
- Other Voltages

**Over 30 Years of LEDtronics Design,
Engineering & Manufacturing Experience**

LED48T8CM-DLC-18W-XIW-101WF (Warm White)
 LED48T8CM-DLC-18W-XWW-101WF (Natural White)
 LED48T8CM-DLC-18W-XPW-101WF (Pure White)

	XIW	XWW	XPW
Input Power	18 Watts	18 Watts	18 Watts
Input Voltage	100~277VAC (Tested @120VAC)		
Input Current	0.145A	0.150A	0.155A
Total Lumens	1800 lm	1800 lm	1800 lm
Max. Candela	360 cd	400 cd	395 cd
Power Factor	0.9	0.9	0.9
Efficacy	100 lm/W	100 lm/W	100 lm/W
CRI	80	80	80
Color Temperature	2750K~3250K	3800K~4300K	5000K~5600K
Illumination Angle	110° x 175°	110° x 110°	110° x 175°
Oper. Temperature	-40°F to 122°F (-40°C to 50°C)		
Heatsink	Aluminum Alloy / Silver Color		
Lens	Polycarbonate / Frosted White		
Base	2-Pin G13		
UL/cUL	E335951 (T8-F12B-18W)		
Dimensions	47.78 x Ø1.02 inch / 1213.6 x Ø26 mm		
Net Weight	0.6 lb / 272.1g		

4 Ft
FROSTED

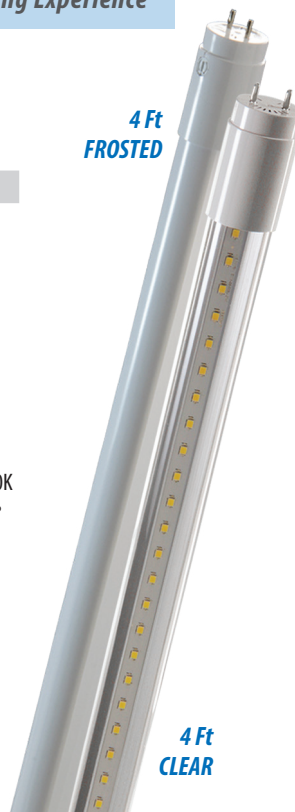


4 Ft
CLEAR

LED48T8CM-DLC-18W-XIW-101WC (Warm White)
 LED48T8CM-DLC-18W-XWW-101WC (Natural White)
 LED48T8CM-DLC-18W-XPW-101WC (Pure White)

	XIW	XWW	XPW
Input Power	18 Watts	18 Watts	18 Watts
Input Voltage	100~277VAC (Tested @120VAC)		
Input Current	0.145A	0.150A	0.155A
Total Lumens	1800 lm	1800 lm	1800 lm
Max. Candela	630 cd	740 cd	705 cd
Power Factor	0.9	0.9	0.9
Efficacy	100 lm/W	100 lm/W	100 lm/W
CRI	80	80	80
Color Temperature	2750K~3250K	3800K~4300K	5000K~5600K
Illumination Angle	120° x 130°	120° x 120°	115° x 125°
Oper. Temperature	-40°F to 122°F (-40°C to 50°C)		
Heatsink	Aluminum Alloy / Silver Color		
Lens	Polycarbonate / Clear		
Base	2-Pin G13		
UL/cUL	E335951 (T8-F12B-18W)		
Dimensions	47.78 x Ø1.02 inch / 1213.6 x Ø26 mm		
Net Weight	0.6 lb / 272.1 g		

Uses 18 Watts, Replaces Fluorescents up to 36W

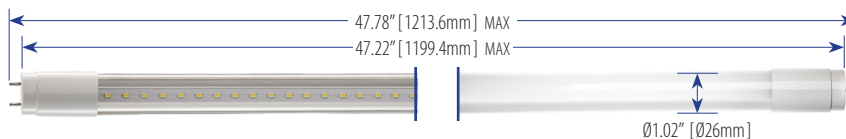

LEDTRONICS®

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505
 Phone: (800) 579.4875 / (310) 534.1505
 Fax: (310) 534.1424
 E-mail: info@ledtronics.com
 Website: ledtronics.com



© 2017 LEDtronics, Inc.

To order LEDtronics products,
contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:
LEDtronics.com

LED T8 Composite Housing Tube Lights – 2 ft / 10 Watts, DLC




2 Ft CLEAR

Uses 10 Watts,
Replaces
Fluorescents
up to 16W


- LED24T8CM-DLC-10W-XIW-101WC (Warm White)
- LED24T8CM-DLC-10W-XWW-101WC (Natural White)
- LED24T8CM-DLC-10W-XPW-101WC (Pure White)

	XIW	XWW	XPW
Input Power	10 Watts	10 Watts	10 Watts
Input Voltage	100~277VAC (Tested @120VAC)		
Input Current	0.085A	0.085A	0.090A
Total Lumens	1000 lm	1000 lm	1000 lm
Max. Candela	410 cd	420 cd	420 cd
Power Factor	0.9	0.9	0.9
Efficacy	100 lm/W	100 lm/W	100 lm/W
CRI	80	80	80
Color Temperature	2750K~3250K	3800K~4300K	5000K~5600K
Illumination Angle	100° x 125°	115° x 125°	110° x 125°
Oper. Temperature	-40°F to 122°F (-40°C to 50°C)		
Heatsink	Aluminum Alloy / Silver Color		
Lens	Polycarbonate / Clear		
Base	2-Pin G13		
UL/cUL	E335951 (T8-F06B-10W)		
DLC Product Code	PKQ3JPHK	PUG3Y2F4	P4ZR74U
Dimensions	23.78 x Ø1.02 inch / 604 x Ø26 mm		
Net Weight	0.325 lbs / 147.4 g		

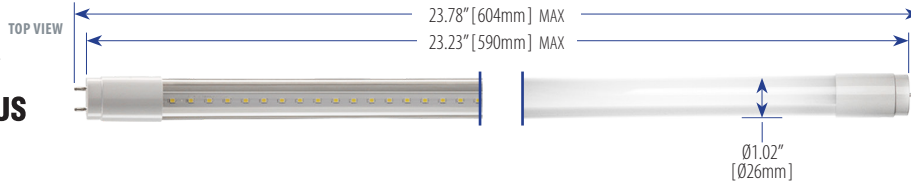

- LED24T8CM-DLC-10W-XIW-101WF (Warm White)
- LED24T8CM-DLC-10W-XWW-101WF (Natural White)
- LED24T8CM-DLC-10W-XPW-101WF (Pure White)

	XIW	XWW	XPW
Input Power	10 Watts	10 Watts	10 Watts
Input Voltage	100~277VAC (Tested @120VAC)		
Input Current	0.085A	0.085A	0.085A
Total Lumens	1000 lm	1000 lm	1000 lm
Max. Candela	240 cd	255 cd	270 cd
Power Factor	0.9	0.9	0.9
Efficacy	100 lm/W	100 lm/W	100 lm/W
CRI	80	80	80
Color Temperature	2750K~3250K	3800K~4300K	5000K~5600K
Illumination Angle	105° x 155°	105° x 160°	105° x 160°
Oper. Temperature	-40°F to 122°F (-40°C to 50°C)		
Heatsink	Aluminum Alloy / Silver Color		
Lens	Polycarbonate / Frosted White		
Base	2-Pin G13		
UL/cUL	E335951 (T8-F06B-10W)		
DLC Product Code	PT8SHGBB	P4J92GBD	PR3Q8A6U
Dimensions	23.78 x Ø1.02 inch / 604 x Ø26 mm		
Net Weight	0.325 lbs / 147.4 g		

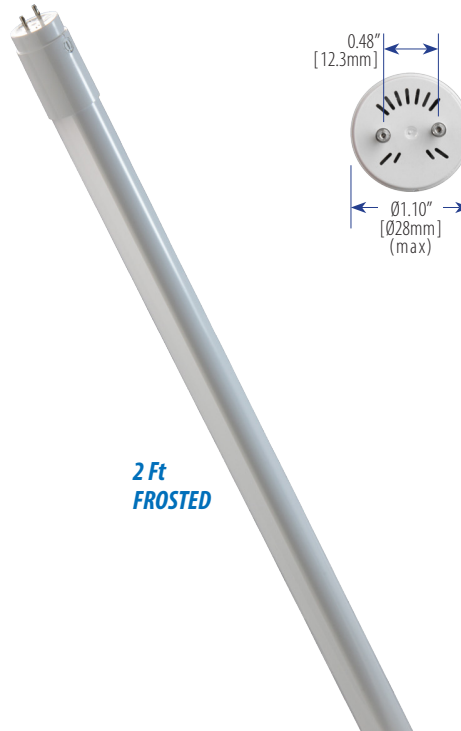

2 Ft FROSTED

