







The versatile radiance of the GE's dimmable candle lamps is not just something you see, it's something you feel.

## LED dimmable candle lamps

### PERFORMANCE DATA Decorative Lamps

Bulb Shape	Base Type	Watts	Order Code	Description	Volts	Case Qty**	MOL (in)	Lumens Initial	CBCP	Initial Color Temp	CRI	Wattage Replacement	*Rated Life L70 (Hrs)	Dimmable	ENERGY STAR® Status	#Location Rating	Additional Information	
<b>Candles</b>																		
	CA11	MED	3.5	68168	LED3DCAM-C/TP	120	3	4.2	170		2700	80	25W	15,000	Yes	★	Damp	Clear, Bent tip
			4	68167	LED4DCAM-F/TP	120	3	4.2	270		2700	82	25W	15,000	Yes	★	Damp	Frost, Bent tip
			65655	LED4DCAM-C/827	120	3	4.2	300		2700	80	40W	15,000	Yes	★	Damp	Clear, Bent tip	
			23707	LED4DCAM-C/5K/TP	120	3	4.2	350		5000	80	40W	15,000	Yes	★	Damp	Clear, Bent tip	
			21250	LED4DCAM-C3/827	120	6	4.2	300		2700	80	40W	15,000	Yes	★	Damp	Clear, Bent tip	
		75554	LED4DCAMCF/824	120	6	4.2	250		2400	80	25W	15,000	Yes		Damp	Clear, Bent tip		
		4.5	23706	LED4.5DCAM-F5KTP	120	3	4.2	350		5000	80	40W	15,000	Yes	★	Damp	Frost, Bent tip	
		89950	LED4.5DCAM-F/TP	120	3	4.2	300		2700	80	40W	15,000	Yes	★	Damp	Frost, Bent tip		
		7	21251	LED7DCAM-C3/827	120	6	4.8	500		2700	80	60W	15,000	Yes	★	Damp	Clear, Bent tip	
		CAND	3.5	68166	LED3DCAC-C/TP	120	3	4.3	170		2700	80	25W	15,000	Yes	★	Damp	Clear, Bent tip
4				68165	LED4DCAC-F/TP	120	3	4.3	270		2700	82	25W	15,000	Yes	★	Damp	Frost, Bent tip
				65654	LED4DCAC-C/827	120	3	4.2	300		2700	80	40W	15,000	Yes	★	Damp	Clear, Bent tip
				23691	LED4DCAC-C/5K/TP	120	3	4.2	350		5000	80	40W	15,000	Yes	★	Damp	Frost, Bent tip
				21231	LED4DCAC-C3/827	120	6	4.3	300		2700	80	40W	15,000	Yes	★	Damp	Clear, Bent tip
			75553	LED4DCACCF/824	120	6	4.3	250		2400	80	25W	15,000	Yes		Damp	Clear, Bent tip	
			4.5	89948	LED4.5DCAC-F/TP	120	3	4.2	300		2700	80	40W	15,000	Yes	★	Damp	Frost, Bent tip
			22239	LED4.5DCAC-F5KTP	120	3	4.2	350		5000	80	40W	15,000	Yes	★	Damp	Frost, Bent tip	
			7	21233	LED7DCAC-C3/827	120	6	4.8	500		2700	80	60W	15,000	Yes	★	Damp	Clear, Bent tip
<b>Globes</b>																		
	G16.5	CAND	4.5	68169	LED4DG16C-W/TP	120	3	3.0	270		2700	82	25W	15,000	Yes	★	Damp	White
				68170	LED4DG16C-C/TP	120	3	3.0	270		2700	82	25W	15,000	Yes		Damp	Clear
			5	89952	LED5DG16C-W/TP	120	3	3.0	350		2700	80	40W	15,000	Yes		Damp	White
	G25	MED	4.5	68171	LED4DG25M-W/TP	120	3	4.3	280		2700	82	25W	15,000	Yes	★	Damp	White
				68172	LED4DG25M-C/TP	120	3	4.3	280		2700	82	25W	15,000	Yes		Damp	Clear
			5	64678	LED5DG25M-W/827	120	6	4.3	350		2700	80	40W	15,000	Yes	★	Damp	White
				21253	LED5DG25-W3/827	120	6	4.3	350		2700	80	40W	15,000	Yes	★	Damp	White
	7	21255	LED7DG25-W3/827	120	6	4.3	500		2700	80	60W	15,000	Yes	★	Damp	White		

For additional product and application information, please consult GE's website: [gelighting.com/ThinkLED](http://gelighting.com/ThinkLED)

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

\* The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original rating (L70)

\*\* Minimum order quantity = 6

★ ENERGY STAR® status: ENERGY STAR® certified. Lamps without a ★ are not ENERGY STAR® certified.

# UL 1993 Environmental Requirements for LED LAMPS

Location, damp - Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to, electrical equipment, and includes partially protected locations.


Location, dry - Location not normally subject to dampness, may include a location subject to temporary dampness, i.e., building under construction, provided ventilation is adequate to prevent an accumulation of moisture.

Location, wet - Location in which water or other liquid can drip, splash, or flow on or against electrical equipment.


Notes:

- 1) Product descriptions ending in "/TP" indicate a carded blister or clamshell package nested in a tray for shelf display. Cards also designed for hook display.
- 2) LED A19 Locking device works on PC: 85791, 85792, 89898, 62182, 89899 and 89900


## CHROMATICITY DIAGRAM

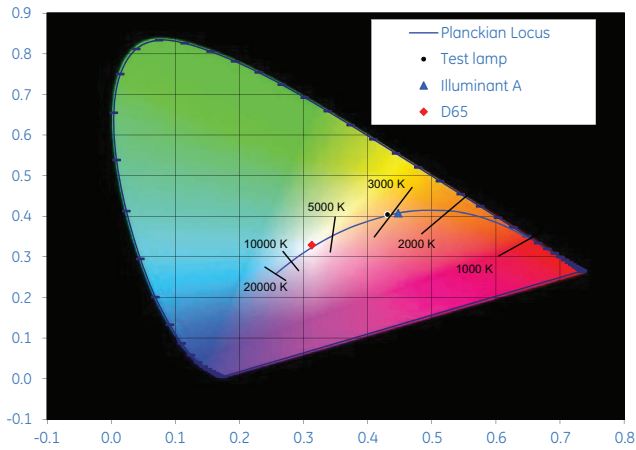


## SPECTRAL POWER DISTRIBUTION

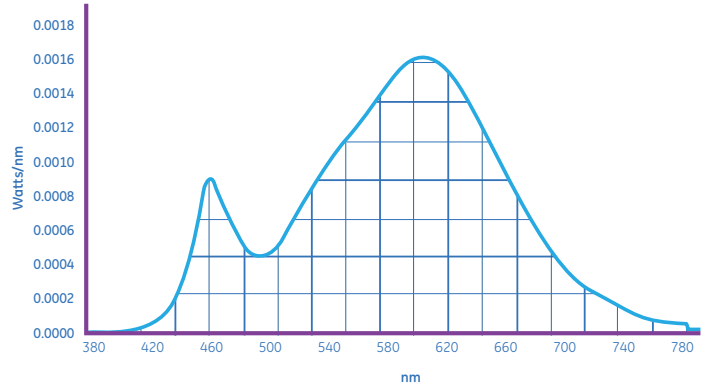

## POLAR PLOT—LIGHT DISTRIBUTION

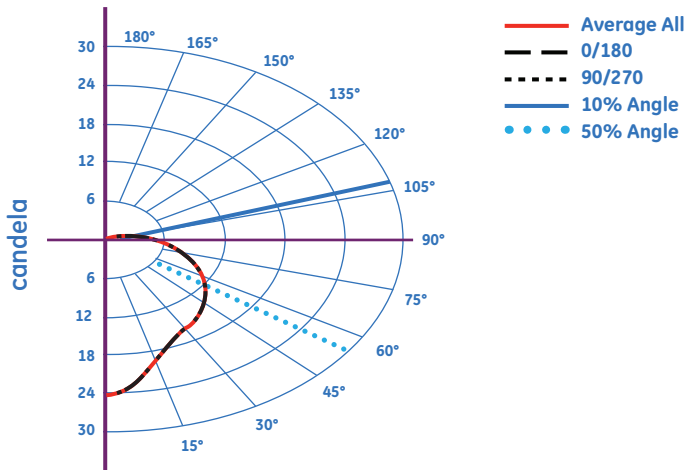

## CONE DIAGRAM

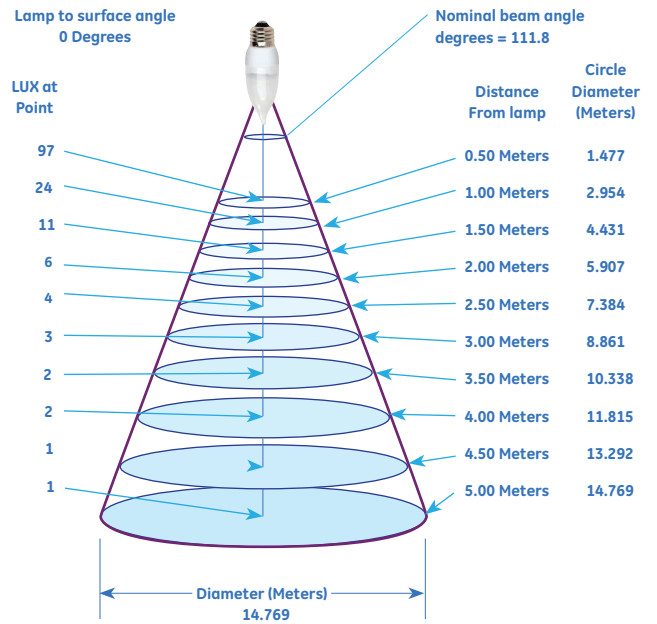

Product is compliant with material restriction requirements of RoHS

ENERGY STAR® is a registered U.S. mark



[www.gelighting.com](http://www.gelighting.com)

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2016 GE.

69172 (Rev 3/9/16)