

SYLVANIA Lamps

Natural™ Series A19/A21

TruWave Technology™

TruWave Technology offers the best alternative to natural light by mimicking the natural light spectrum, all while saving energy.

Benefits and Features

- Controls blue wavelengths for lower glare and reduced eye strain to improve readability and supports an improved sleep-wake cycle
- Perfect fit where clean light color rendering is needed for seeing realistic, vivid colors without sacrificing light output
- Properly saturates red to make building spaces and flesh tones accurate and vibrant, without oversaturating (which compromises energy efficiency)
- Exceptional color quality without the loss of efficacy typical of most 90+ CRI solutions
- Up to 123 LPW
- 2700K, 3000K, 4000K and 5000K color temperatures
- CRI 90+ for exceptional color quality

Electrical

- 120VAC
- Power factor >0.90
- Dimmable down to 10%

Rated Life

- 15,000 hours (L₇₀)

Warranty

- 5 year limited lamp warranty (3 hours per day operation)

Ambient Operating Range

- -4°F to 113°F (-20°C to 45°C)



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
Incandescent	40	5.5	\$57
Incandescent	60	8	\$86
Incandescent	75	11	\$106
Incandescent	100	15	\$140

Certifications and Listings

- cULus
- RoHS
- Lead Free
- FCC*
- ENERGY STAR®
- California Title 20

*FCC Title 47 CFR, Part 15 Subpart B Class B



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

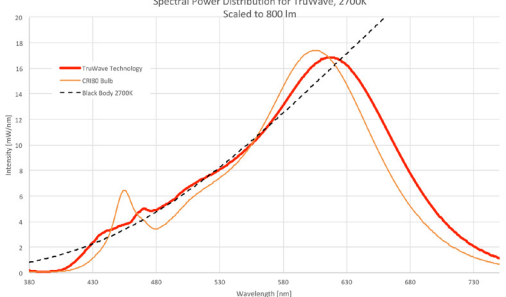
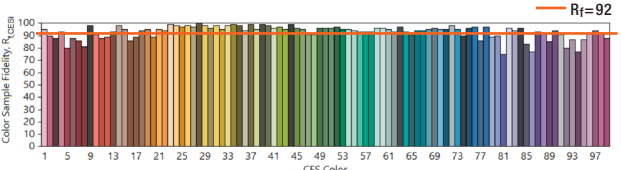
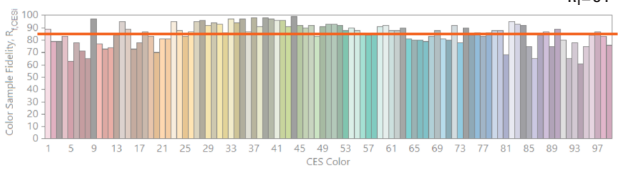
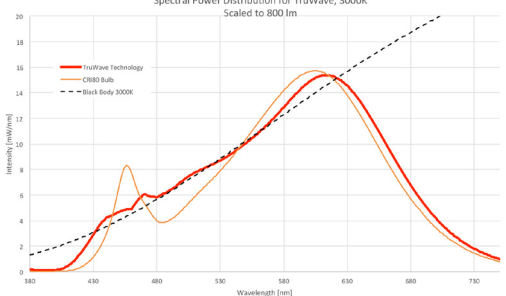
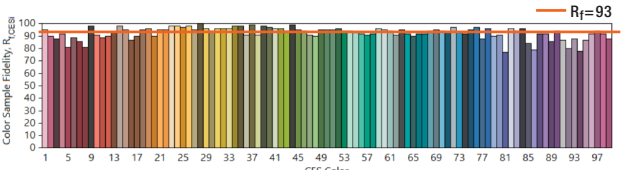
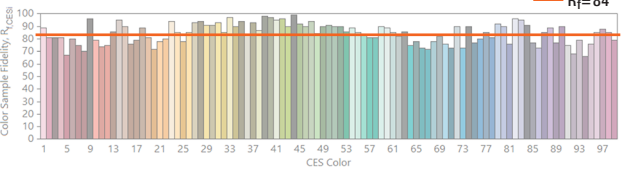
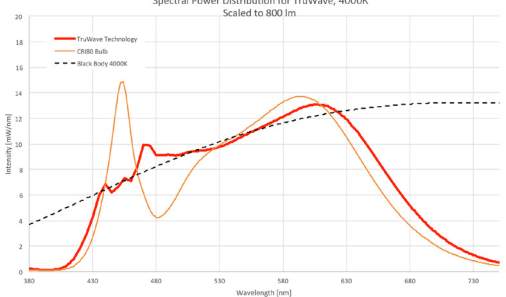
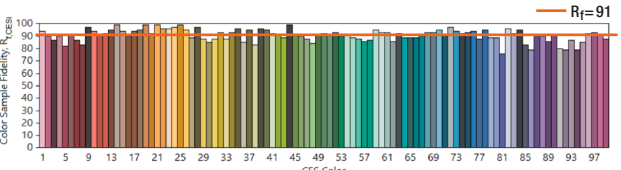
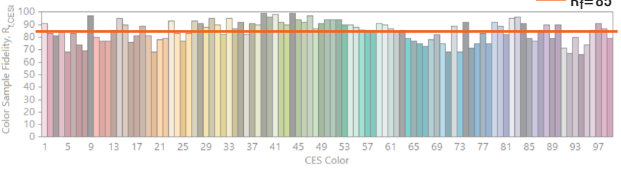
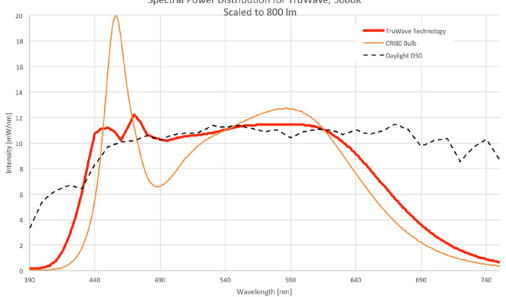
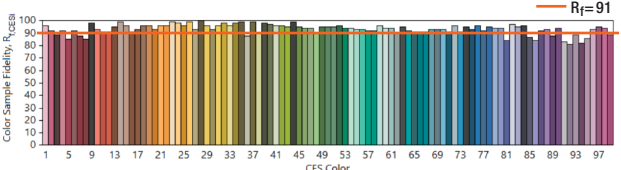
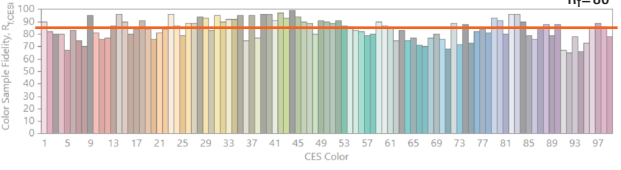
Ordering Guide

LED	XX	AXX	DIM	XX	9	XX	13Y	TL	RPX
LED	Wattage 5.5 = 5.5 Watts 8 = 8 Watts 11 = 11 Watts 15 = 15 Watts	Lamp Type A19, A21	DIM = Dimmable	Bulb Finish CL = Clear O = Omnidirectional	CRI 9 = 90+	Color Temperature 27 = 2700K 30 = 3000K 40 = 4000K 50 = 5000K	Lamp Life 13Y = 13 Year Life	TL = Natural with TruWave Technology™	RP = Retail Pack RP4 = 4PK Retail

Ordering Information

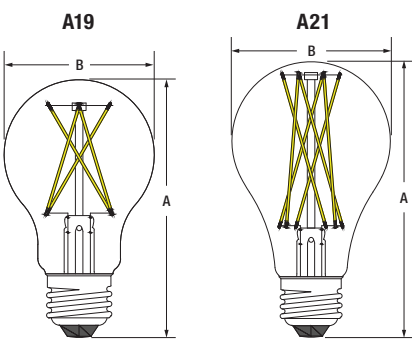
Item Number	Ordering Abbreviation	Finish	Power (W)	Base Type	Input Voltage	Average Life (hrs)	Typical Lumens (lm)	CCT	CRI	LPW
40686	LED5.5A19DIMCL92713YTLRP4 16/CS 4/SKU	Clear	5.5	E26	120V	15,000	450	2700K	90+	82
40699	LED5.5A19DIMCL92713YTLRP 6/CS 1/SKU	Clear	5.5	E26	120V	15,000	450	2700K	90+	82
40724	LED5.5A19DIM092713YTLRP 6/CS 1/SKU	Frosted	5.5	E26	120V	15,000	450	2700K	90+	82
40668	LED5.5A19DIM092713YTLRP4 16/CS 4/SKU	Frosted	5.5	E26	120V	15,000	450	2700K	90+	82
41150	LED5.5A19DIM093013YTLRP 6/CS 1/SKU	Frosted	5.5	E26	120V	15,000	450	3000K	90+	82
41212	LED5.5A19DIM093513YTLRP 6/CS 1/SKU	Frosted	5.5	E26	120V	15,000	450	3500K	90+	82
41296	LED5.5A19DIM093513YTLRP4 16/CS 4/SKU	Frosted	5.5	E26	120V	15,000	450	3500K	90+	82
41143	LED5.5A19DIM094013YTLRP4 16/CS 4/SKU	Frosted	5.5	E26	120V	15,000	450	4000K	90+	82
49826	LED5.5A19DIMCL95013YTLRP4 16/CS 4/SKU	Clear	5.5	E26	120V	15,000	450	5000K	90+	82
40725	LED5.5A19DIM095013YTLRP 6/CS 1/SKU	Frosted	5.5	E26	120V	15,000	450	5000K	90+	82
40669	LED5.5A19DIM095013YTLRP4 16/CS 4/SKU	Frosted	5.5	E26	120V	15,000	450	5000K	90+	82
40700	LED8A19DIMCL92713YTLRP 6/CS 1/SKU	Clear	8	E26	120V	15,000	800	2700K	90+	100
40687	LED8A19DIMCL92713YTLRP4 16/CS 4/SKU	Clear	8	E26	120V	15,000	800	2700K	90+	100
40671	LED8A19DIM092713YTLRP 6/CS 1/SKU	Frosted	8	E26	120V	15,000	800	2700K	90+	100
40670	LED8A19DIM092713YTLRP4 16/CS 4/SKU	Frosted	8	E26	120V	15,000	800	2700K	90+	100
40748	LED8A19DIM092713YTLRP6 18/CS 6/SKU	Frosted	8	E26	120V	15,000	800	2700K	90+	100
41151	LED8A19DIM093013YTLRP 6/CS 1/SKU	Frosted	8	E26	120V	15,000	800	3000K	90+	100
41211	LED8A19DIM093513YTLRP 6/CS 1/SKU	Frosted	8	E26	120V	15,000	800	3500K	90+	100
41295	LED8A19DIM093513YTLRP4 16/CS 4/SKU	Frosted	8	E26	120V	15,000	800	3500K	90+	100
41142	LED8A19DIM094013YTLRP 16/CS 4/SKU	Frosted	8	E26	120V	15,000	800	4000K	90+	100
49827	LED8A19DIMCL95013YTLRP4 16/CS 4/SKU	Clear	8	E26	120V	15,000	800	5000K	90+	100
40809	LED8A19DIMCL95013YTLRP16 WO 16/CS 16/SKU	Clear	8	E26	120V	15,000	800	5000K	90+	100
40673	LED8A19DIM095013YTLRP 6/CS 1/SKU	Frosted	8	E26	120V	15,000	800	5000K	90+	100
40672	LED8A19DIM095013YTLRP4 16/CS 4/SKU	Frosted	8	E26	120V	15,000	800	5000K	90+	100
49824	LED8A19DIM095013YTLRP6 18/CS 6/SKU	Frosted	8	E26	120V	15,000	800	5000K	90+	100
40701	LED11A19DIMCL92713YTLRP 6/CS 1/SKU	Clear	11	E26	120V	15,000	1100	2700K	90+	100
40688	LED11A19DIMCL92713YTLRP4 16/CS 4/SKU	Clear	11	E26	120V	15,000	1100	2700K	90+	100
40726	LED11A19DIM092713YTLRP 6/CS 1/SKU	Frosted	11	E26	120V	15,000	1100	2700K	90+	100
40662	LED11A19DIM092713YTLRP4 16/CS 4/SKU	Frosted	11	E26	120V	15,000	1100	2700K	90+	100
40750	LED11A19DIM092713YTLRP2 8/CS 2/SKU	Frosted	11	E26	120V	15,000	1100	2700K	90+	100
41152	LED11A19DIM093013YTLRP 6/CS 1/SKU	Frosted	11	E26	120V	15,000	1100	3000K	90+	100
41213	LED11A19DIM093513YTLRP 6/CS 1/SKU	Frosted	11	E26	120V	15,000	1100	3500K	90+	100
41297	LED11A19DIM093513YTLRP4 16/CS 4/SKU	Frosted	11	E26	120V	15,000	1100	3500K	90+	100
41144	LED11A19DIM094013YTLRP 16/CS 4/SKU	Frosted	11	E26	120V	15,000	1100	4000K	90+	100
40803	LED11A19DIMCL95013YTLRP4 16/CS 4/SKU	Clear	11	E26	120V	15,000	1100	5000K	90+	100
40727	LED11A19DIM095013YTLRP 6/CS 1/SKU	Frosted	11	E26	120V	15,000	1100	5000K	90+	100
40663	LED11A19DIM095013YTLRP4 16/CS 4/SKU	Frosted	11	E26	120V	15,000	1100	5000K	90+	100
40751	LED11A19DIM095013YTLRP2 8/CS 2/SKU	Frosted	11	E26	120V	15000	1100	5000K	90+	100
40702	LED15A21DIMCL92713YTLRP 6/CS 1/SKU	Clear	15	E26	120V	15,000	1600	2700K	90+	107
40754	LED15A21DIMCL92713YTLRP2 8/CS 2/SKU	Clear	15	E26	120V	15,000	1600	2700K	90+	107
40689	LED15A21DIMCL92713YTLRP4 16/CS 4/SKU	Clear	15	E26	120V	15,000	1600	2700K	90+	107
40665	LED15A21DIM092713YTLRP 6/CS 1/SKU	Frosted	15	E26	120V	15,000	1600	2700K	90+	107
40752	LED15A21DIM092713YTLRP2 8/CS 2/SKU	Frosted	15	E26	120V	15,000	1600	2700K	90+	107
40664	LED15A21DIM092713YTLRP4 16/CS 4/SKU	Frosted	15	E26	120V	15,000	1600	2700K	90+	107
41149	LED15A21DIM093013YTLRP 6/CS 1/SKU	Frosted	15	E26	120V	15,000	1600	3000K	90+	107
41187	LED15A21DIM093513YTLRP 6/CS 1/SKU	Frosted	15	E26	120V	15,000	1600	3500K	90+	107
41294	LED15A21DIM093513YTLRP4 16/CS 4/SKU	Frosted	15	E26	120V	15,000	1600	3500K	90+	107
41137	LED15A21DIM094013YTLRP 6/CS 1/SKU	Frosted	15	E26	120V	15,000	1600	4000K	90+	107
40875	LED15A21DIMCL95013YTLRP4 16/CS 4/SKU	Clear	15	E26	120V	15,000	1600	5000K	90+	107
49828	LED15A21DIMCL95013YTLRP2 8/CS 2/SKU	Clear	15	E26	120V	15000	1600	5000K	90+	107
40753	LED15A21DIM095013YTLRP2 8/CS 2/SKU	Frosted	15	E26	120V	15000	1600	5000K	90+	107
40667	LED15A21DIM095013YTLRP 6/CS 1/SKU	Frosted	15	E26	120V	15,000	1600	5000K	90+	107
40666	LED15A21DIM095013YTLRP4 16/CS 4/SKU	Frosted	15	E26	120V	15,000	1600	5000K	90+	107

Color Quality Comparison

CCT	Spectral Power Distribution	TM-30-18 Fidelity Index
2700K	Spectral Power Distribution for TruWave, 2700K Scaled to 800 lm 	TM-30-18 Fidelity Index  TruWave™ LED – Optimized Color Fidelity  80 CRI LED
3000K	Spectral Power Distribution for TruWave, 3000K Scaled to 800 lm 	TM-30-18 Fidelity Index  TruWave™ LED – Optimized Color Fidelity  80 CRI LED
4000K	Spectral Power Distribution for TruWave, 4000K Scaled to 800 lm 	TM-30-18 Fidelity Index  TruWave™ LED – Optimized Color Fidelity  80 CRI LED
5000K	Spectral Power Distribution for TruWave, 5000K Scaled to 800 lm 	TM-30-18 Fidelity Index  TruWave™ LED – Optimized Color Fidelity  80 CRI LED

Physical Information

	(A) Height inches (mm)	(B) Diameter inches (mm)
A19	4.05 (103)	2.36 (60)
A21	4.57 (116)	2.64 (67)



LEDVANCE LLC
200 Ballardvale Street
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

 /sylvania  /sylvania

