

DESCRIPTION

LED Filament Lamps replicate the traditional design of incandescent filament bulbs while providing significant energy savings. These lamps contain LED emitters in linear filament style rods that are powered by using a glass insulated circuit, similar to a vintage incandescent light bulbs. The perfect replacement for your existing incandescent light bulbs with 15,000 hours average rated life and energy savings of up to 70%. naturaLED® offers a full line in A19, G25, ST19, and Candelabra lamps that deliver a warm light in 2200K and tinted glass. Designed for decorative residential, retail, hotel boutiques, hospitality, restaurants, and many more applications.



FEATURES

- Energy star certified
- UL wet/UL damp locations
- Title20/JA8-2016
- Warm light 2200K
- Instant on / Uniform and consistent color
- Up to 70% energy savings
- Omni-directional
- Direct Replacement traditional incandescent design
- Suitable for outdoor usage
- Contains no mercury or lead
- Input line voltage: 120V
- CRI: 90
- Power Factor: >0.9
- Dimmable
- Operating temperature: -4°F - 104°F
- Finish: Tinted Glass
- 15,000 hrs rated average life

APPLICATIONS

- Residential Lighting
- Decorative Lighting
- Retail Lighting
- Restaurant Lighting
- Hospitality Lighting

WARRANTY

- 3 Year Warranty

Ordering Information

EXAMPLE: LED4.5CAF/FIL/E12/30L/922

LED	4.5	CAF	FIL	E12	30L	922
	Wattage	Category	Style	Base	Lumen	CRI/Color Temp
LED	4.5 4.5-Watts	CAF Candelabra	FIL Filament	E12 Candelabra	30L 300	9 CRI 90 22 2200K

ORDERING


W= Wet Location D=Damp Location

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Base	Equiv. Wattage (W)	Bulb Shape	Rated Hrs	Wet/Damp Location	Energy Star JA8 T20
4.5	5940	LED4.5CAF/FIL/E12/30L/922	2200K	300	E12	40	Candle	15,000	W	•
5	5941	LED5CAF/FIL/E26/32L/922	2200K	325	E26	40	Candle	15,000	W	-
5	5942	LED5G25/FIL/35L/922	2200K	350	E26	40	G25	15,000	W	•
6.5	5994	LED6.5A19/FIL/45L/922	2200K	455	E26	40	A19	15,000	D	•
6.5	5995	LED6.5ST19/FIL/45L/922	2200K	450	E26	40	ST19	15,000	D	•

PHOTOMETRICS CHART


CAF (4.5 Watt)

E12 Base




CAF (5 Watt)

E26 Base




G (5 Watt)

E26 Base




A19 (6.5 Watt)

E26 Base



ST19 (6.5 Watt)


E26 Base



SPECIFICATIONS


Candle E12

Weight: 1.57-oz

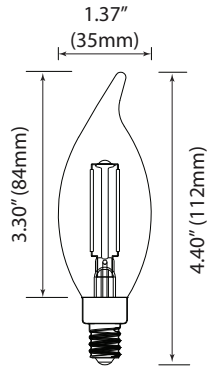


Candle E26

Weight: 1.90-oz

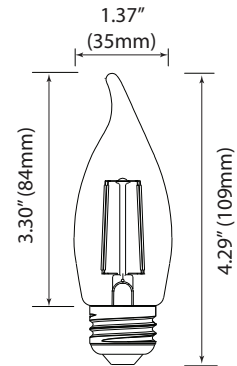


G25

Weight: 4.66-oz

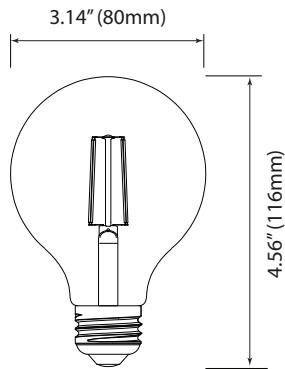


A19

Weight: 4.22-oz

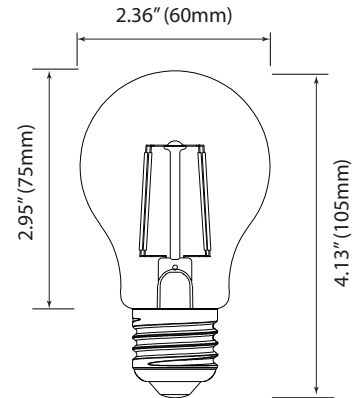


ST19

Weight: 4.30-oz

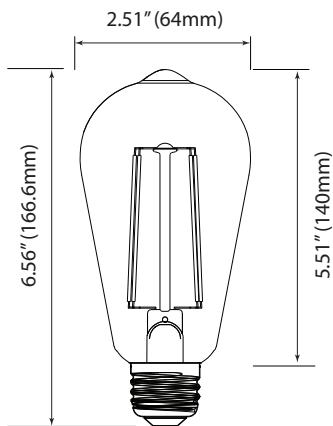

PACKAGE



Package
(Master)

10