

SubstiTUBE® DULUX® LED Pin Base Lamps



Key Features & Benefits

- Ballast compatible LED replacement lamps for traditional pin-base compact fluorescent lamps minimize labor cost by utilizing existing fluorescent ballasts.
- G24q/GX24q base lamps have four pins and operate on existing electronic ballasts directly replacing DULUX D/E traditional lamps.*
- GX23 base lamps have two pins, operate on magnetic ballasts and are for horizontal applications, directly replacing DULUX DS traditional lamps.
- High LPW of up to 122 provides a low wattage, energy saving replacement for traditional lamps.
- Horizontal and Vertical configurations available with G24q/GX24q to optimize different fixture optics.
- Horizontal lamps have rotating bases for ease of directing light.
- Over current protection provides consistent lumen output regardless of compatible ballast operation.
- Over temperature protection ensures that lamps will not overheat.
- Available in 2700K-4100K providing choices to harmonize colors with other technologies in the same application space.
- Long life of 50,000 hours, lasting up to three times as long as the lamps they replace, minimizes maintenance costs over the life of the lamp.
- 5-year warranty for worry-free installations.

*See chart below for replacement guide.

Product Offering

Ordering Abbreviation	Wattage	CCT	Typical Lumens
LED6PBGX23H	6	2700K, 3500K, 4100K	625
LED9PBGX24QHG2	9	2700K, 3000K, 3500K, 4100K	900, 950, 1000
LED9PBGX24QVG2	9	2700K, 3000K, 3500K, 4100K	900, 950, 1000

Application Information

Applications

- Commercial
- Healthcare facilities
- Hospitality
- Office
- Property management
- Residential
- Retail

Application Notes

1. Operating Temperature range between -20°C and 45°C.
2. Not for use in totally enclosed fixtures.
3. Suitable for damp locations.
4. Not for use with emergency light fixtures or exit lights.
5. Not suitable for use in dimming applications.
6. Check LED retrofit compatibility list and ballast compatibility list (www.sylvania.com) before installation.
7. Selected LED Retrofit models may produce less light output than corresponding original traditional CFL lamps.
8. DULUX LED GX24Q lamp works in a G24Q base and any base of the series. Verify MOL for compatibility.
9. DULUX LED GX23 is not a replacement for 7W & 5W traditional CFL lamps.
10. DULUX GX23 base is not compatible with traditional G23 base.
11. This DULUX LED family is not compatible with G24d-1 2-pin 13W, G24d-2 4-pin 18W and G24d-3 4-pin 26W.

Specifications and Certifications



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Specifications

EMI/RFI: FCC Title 47 CFR, Part 18, Non-Consumer (GX24q)
and Part 15, Class B (GX23)

Ordering Information

Item Number	Ordering Abbreviation	Configuration	Wattage	Lumens (lm)	CCT	CRI	DIM	DLC (Y/N)
40448	LED6PBGX23H827	Horizontal	6W	625	2700K	80	No	N/A
40449	LED6PBGX23H835	Horizontal	6W	625	3500K	80	No	N/A
40450	LED6PBGX23H841	Horizontal	6W	625	4100K	80	No	N/A
40019	LED9PBGX24QH827G2	Horizontal	9W	900	2700K	80	No	Y
40020	LED9PBGX24QH830G2	Horizontal	9W	950	3000K	80	No	Y
75036	LED9PBGX24QH835G2	Horizontal	9W	950	3500K	80	No	Y
75037	LED9PBGX24QH841G2	Horizontal	9W	1000	4100K	80	No	Y
40017	LED9PBGX24QV827G2	Vertical	9W	900	2700K	80	No	Y
40018	LED9PBGX24QV830G2	Vertical	9W	950	3000K	80	No	Y
75038	LED9PBGX24QV835G2	Vertical	9W	950	3500K	80	No	Y
75039	LED9PBGX24QV841G2	Vertical	9W	1000	4100K	80	No	Y

Ordering Guide

LED	9	/	PB	/	GX23	/	H	/	8	35	G2
LED Lamp	Wattage		Pin Base		Base Type		Orientation		CRI= 80+	Color Temperature	Generation

Lamp Dimensions

Ordering Abbreviation	GX23		GX24Q Horizontal		GX24Q Vertical	
	(A) Max. Overall Length	(B) Base Face to Top of Lamp	(A) Max. Overall Length	(B) Base Face to Top of Lamp	(C) Guide Post Length	(D) Max. Base Width
GX23	6.77" (172mm)	6.18" (157mm)	6.61" (168mm)	6.02" (153mm)	.59" (15mm)	1.06" (27mm)
GX24Q Horizontal	6.61" (168mm)	6.02" (153mm)	4.63" (117.5mm)	4.0" (101.5mm)	.59" (15mm)	1.06" (27mm)
GX24Q Vertical	4.63" (117.5mm)	4.0" (101.5mm)			.63" (16mm)	1.81" (46mm)


Replacement Chart

Traditional Family	Watts	Traditional Description	Traditional DULUX®			SubstiTUBE® DULUX LEDr Lamps				Comments About LEDr Replacement	
			Watts	Mean Lamp Lumens	Base	MOL Length	LEDr Base	MOL LEDr H	MOL LEDr V		Lumens
DULUX D/E Electronic	26	CF26DD/E/8XX/ECO	26	1470	G24q-3	6.5	G24q/ GX24q	6.61	4.63	900-1000	Direct Replacement
	18	CF18DD/E/8XX/ECO	18	989	G24q-2	5.8		6.61		900-1000	Check length and brightness
	13	CF13DD/E/8XX/ECO	13	774	G24q-1	5.2		6.61		900-1000	Check length and brightness
DULUX T/E Electronic	42	CF42DT/E/IN/8XX/ECO	42	2752	GX24q-4	6.5		6.61	4.63	900-1000	Lower Lumens
	32	CF32DT/E/IN/8XX/ECO	32	2064	GX24q-3	5.6		6.61			Lower Lumens
	26	CF26DT/E/IN/8XX/ECO	26	1548	GX24q-3	5		6.61	4.63		Might be too long for fixture
	18	CF18DT/E/IN/8XX/ECO	18	1032	GX24q-2	4.4	6.61	4.63	Check brightness		
13	CF13DT/E/ECO	13	774	GX24q-1	4.2	6.61	4.63	Check brightness			
DULUX S Magnetic	13	CF13DS/ECO	13	688	GX23	7.1	GX23	6.61	N/A	625	Direct Replacement

Note: Before replacing lamps with LED replacement lamps, check the lumens and overall length of the lamp to ensure a proper retrofit.

Key:
Direct Replacement
Likely fit, check fixture dimensions
Base fits, length or lumens may be prohibitive

Base Types

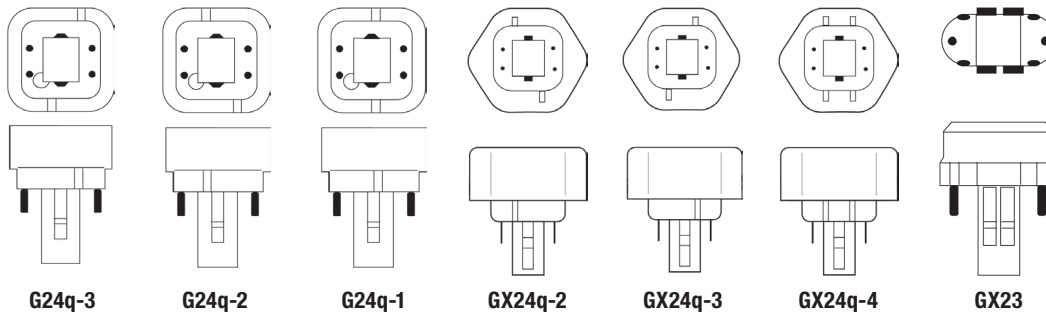

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
 www.sylvania.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

[/sylvania](#) [/sylvania](#)

