

# SYLVANIA Lamps

## Natural™ Series PAR Family

### TruWave Technology™

TruWave Technology offers the best alternative to natural light by mimicking the natural light spectrum, all while saving energy.

### Benefits and Features

- Controls blue wavelengths for lower glare and reduced eye strain to improve readability and supports an improved sleep-wake cycle
- Perfect fit where clean light color rendering is needed for seeing realistic, vivid colors without sacrificing light output
- Properly saturates red to make building spaces and flesh tones accurate and vibrant, without oversaturating (which compromises energy efficiency)
- Exceptional color quality without the loss of efficacy typical of most 90+ CRI solutions
- Up to 85 LPW
- 3000K and 5000K color temperatures
- CRI 90+
- Available beam angles: 25° and 40°

### Electrical

- 120VAC
- Power factor >0.90
- Dimmable down to 10%

### Rated Life

- 25,000 hours (L<sub>70</sub>)

### Warranty

- 5 year limited lamp warranty (3 hours per day operation)

### Ambient Operating Range

- -4°F to 113°F (-20°C to 45°C)



### Wattage Comparison

PAR Lamp	Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
PAR16	Halogen	50	6	\$121
PAR20	Halogen	50	6.5	\$119.63
PAR30	Halogen	75	10	\$181.50
PAR38	Halogen	100	13	\$211.75
PAR38	Halogen	120	15	\$291.50

### Certifications and Listings

- cETLus
- ENERGY STAR®
- RoHS
- CEC Title 20

### Installation

- Suitable for indoor and outdoor dry, damp and wet locations
- Not for use in totally enclosed fixtures, emergency light fixtures, or exit lights



## Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

## Ordering Guide


LED	XX	PARXX	XXXX	DIM	9	XX	TL	XXX	XX	GL	RP
LED	Wattage 6 = 6 Watts 6.5 = 6.5 Watts 10 = 10 Watts 13 = 13 Watts 15 = 15 Watts	Lamp Type PAR16, PAR20, PAR30, PAR30LN, PAR38	Base Blank = E26 GU10 = GU10	DIM = Dimmable	CRI 9 = 90+	Color Temperature 30 = 3000K 50 = 5000K	TL = Natural with TruWave Technology™	FL = Flood NFL = Narrow Flood	40 = 40° 25 = 25°	GL = Glass	RP = Retail Pack

## Ordering Information


Item Number	Ordering Abbreviation	Power (W)	Base Type	Replaces	Input Voltage	Average Life (hrs)	Typical Lumens (lm)	CCT	CRI
40930	LED6PAR16DIM930TLFL40GLRP 6/CS 1/SKU	6	E26	50W Halogen	120V	25,000	450	3000K	90+
40931	LED6PAR16DIM950TLFL40GLRP 6/CS 1/SKU	6	E26	50W Halogen	120V	25,000	450	5000K	90+
40932	LED6PAR16GU10DIM930TLFL40GLRP 6/CS 1/SKU	6	GU10	50W Halogen	120V	25,000	450	3000K	90+
40933	LED6PAR16GU10DIM950TLFL40GLRP 6/CS 1/SKU	6	GU10	50W Halogen	120V	25,000	450	5000K	90+
40920	LED6.5PAR20DIM930TLFL40GLRP 6/CS 1/SKU	6.5	E26	50W Halogen	120V	25,000	550	3000K	90+
40921	LED6.5PAR20DIM950TLFL40GLRP 6/CS 1/SKU	6.5	E26	50W Halogen	120V	25,000	550	5000K	90+
40914	LED10PAR30DIM930TLNFL25GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	3000K	90+
40915	LED10PAR30DIM950TLNFL25GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	5000K	90+
40916	LED10PAR30DIM930TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	3000K	90+
40917	LED10PAR30DIM950TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	5000K	90+
40910	LED10PAR30LNDIM930TLNFL25GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	3000K	90+
40911	LED10PAR30LNDIM950TLNFL25GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	5000K	90+
40912	LED10PAR30LNDIM930TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	3000K	90+
40913	LED10PAR30LNDIM950TLFL40GLRP 6/CS 1/SKU	10	E26	75W Halogen	120V	25,000	850	5000K	90+
40899	LED13PAR38DIM930TLNFL25GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	3000K	90+
40900	LED13PAR38DIM950TLNFL25GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	5000K	90+
40901	LED13PAR38DIM930TLFL40GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	3000K	90+
40902	LED13PAR38DIM950TLFL40GLRP 6/CS 1/SKU	13	E26	100W Halogen	120V	25,000	1100	5000K	90+
40903	LED15.5PAR38DIM930TLNFL25GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	3000K	90+
40904	LED15.5PAR38DIM950TLNFL25GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	5000K	90+
40905	LED15.5PAR38DIM930TLFL40GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	3000K	90+
40906	LED15.5PAR38DIM950TLFL40GLRP 6/CS 1/SKU	15.5	E26	120W Halogen	120V	25,000	1250	5000K	90+

## Physical Information

	(A) Height inches (mm)	(B) Diameter inches (mm)
PAR16 GU10	2.05 (52)	1.97 (50)
PAR16 E26	2.76 (70)	1.97 (50)
PAR20	3.19 (81)	2.48 (63)
PAR30	3.54 (90)	3.74 (95)
PAR30LN	4.41 (112)	3.74 (95)
PAR38	5.12 (130)	4.72 (120)

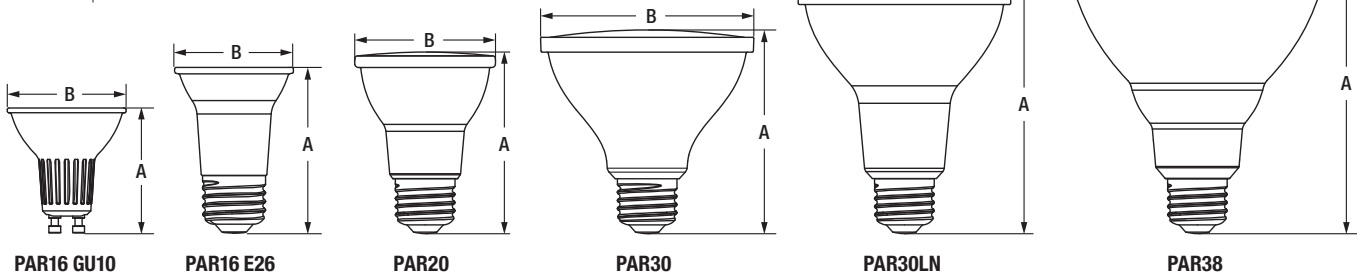

## Color Quality Comparison

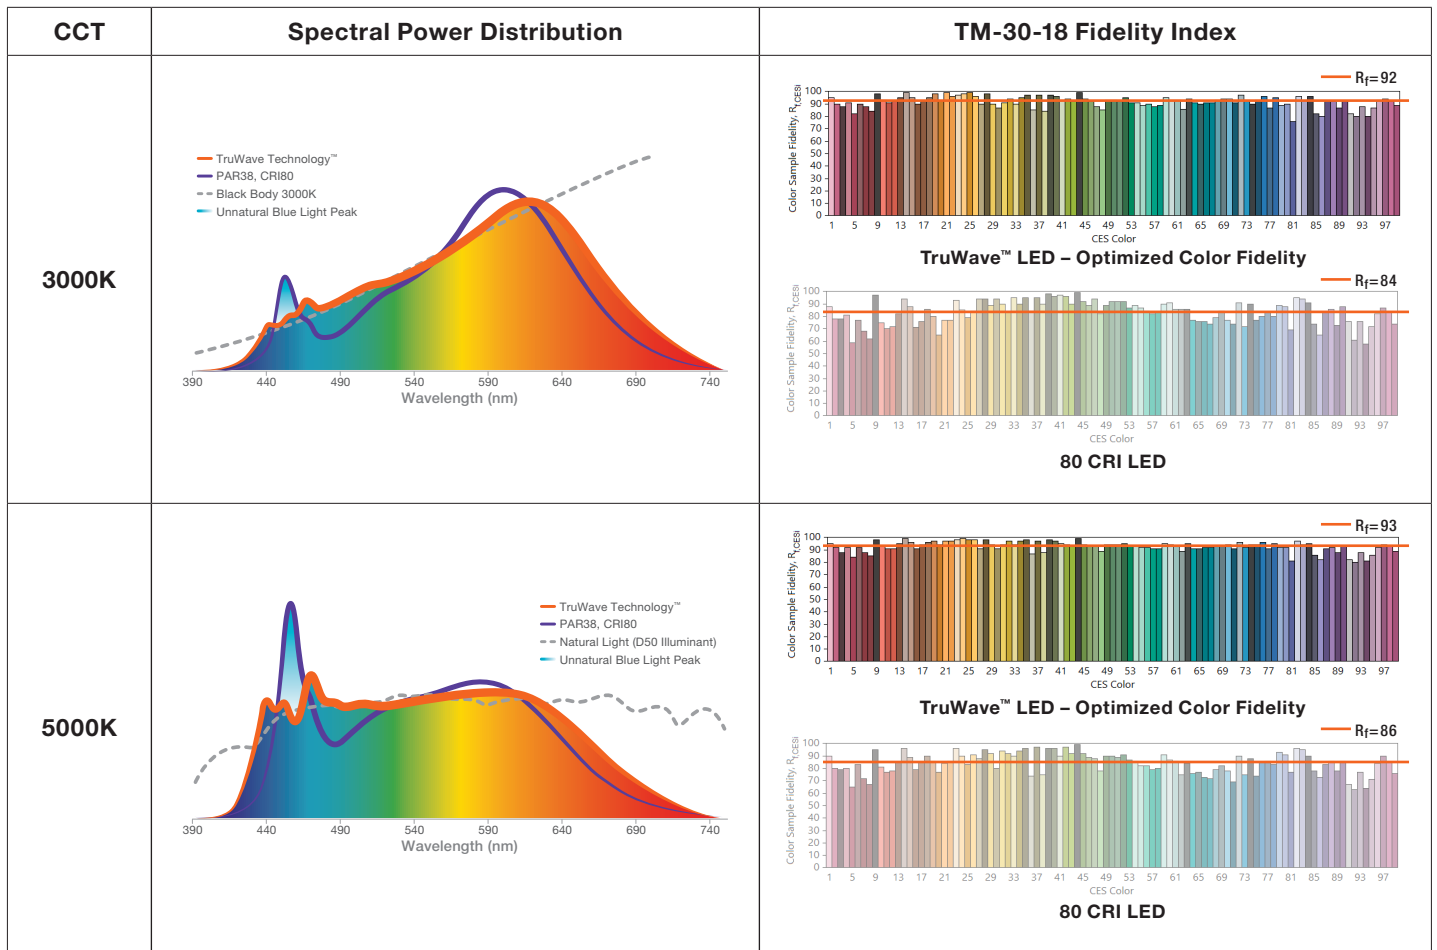

LEDVANCE LLC  
 200 Ballardvale Street  
 Wilmington, MA 01887 USA  
 Phone 1-800-LIGHTBULB (1-800-544-4828)  
[www.sylvania.com](http://www.sylvania.com)

SYLVANIA and LEDVANCE are registered trademarks.  
 All other trademarks are those of their respective owners.  
 Licensee of product trademark SYLVANIA in general lighting.  
 Specifications subject to change without notice.

/sylvania /sylvania

