

PROJECT:

DATE:

PART #:

REP:

NOTES:

T5 LED Tube

T5 LINEAR FLUORESCENT RETROFIT LAMP



FEATURES

- Exceptional lighting efficacy of 160lm/W, with low energy and maintenance costs
- Uniform light output
- A direct replacement for existing T5 fluorescent lighting systems
- Type B double-ended installation

WARRANTY

5-year standard warranty

(z details available at www.energyfocus.com)

IDEAL APPLICATIONS

- Auditoriums
- Warehouses
- Offices
- Retail Stores
- Industrial Sites
- Manufacturing Areas



SPECIFICATIONS

ITEM	SPECIFICATION	SPECIFICATION DETAILS
GENERAL PERFORMANCE	CRI	>80
	Beam Angle	140°
	Rated Life	≥ 50,000 hours
ELECTRICAL	Power Factor	>0.88
	Input Voltage	100-277vac, 50/60hz
	Dimming	Non-dimmable
PHYSICAL	Base Type	G5
	Body	Oval extruded aluminum
	Lens	Polycarbonate lens
	Driver	Double end (end-to-end) power; integrated LED driver
	Operating Temperature	-20°C to 52°C
	Storage Temperature	-30°C to 60°C
	Working Humidity	30% to 85%
	Storage Humidity	10% to 90%
QUALIFICATION	Warranty	5-year standard warranty
	IES File	IES file available upon request

ORDERING


PART #	LENGTH	WATTAGE	LUMENS	CCT	LENS
LEDFLT5-840-424-AL-BB	46"	24W	3900lm	4000K	Frosted
LEDFLT5-850-424-AL-BB	46"	24W	3900lm	5000K	Frosted

*Special order product, please call us at 1-800-327-7877 to order

To view our DLC Qualified products, please consult the DLC Qualified products list at www.designlights.org/qpl

WIRING DIAGRAM

Type B (Double-Ended Power Input)

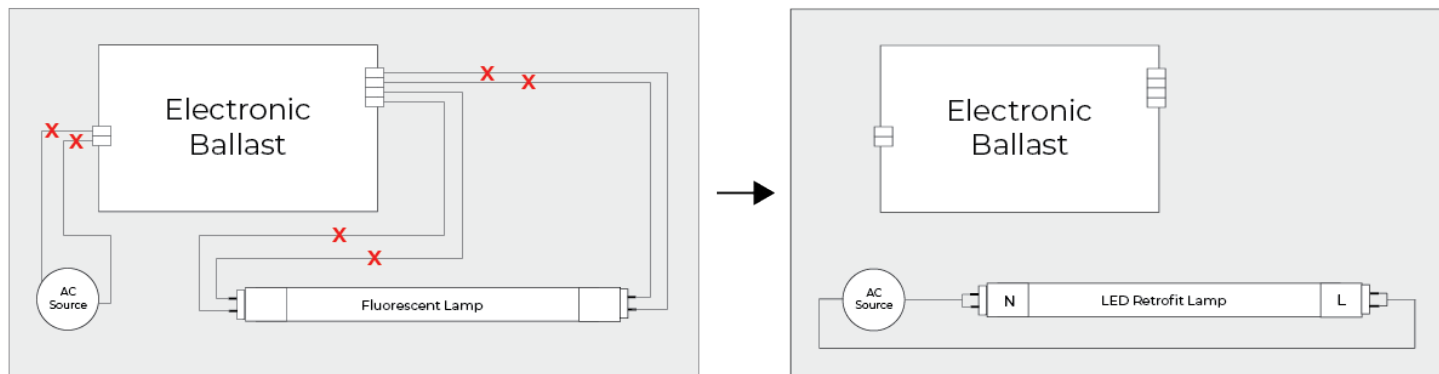

To view full installation instructions, visit the product page on our website www.energyfocus.com