



23105 Kashiwa Court, Torrance, CA 90505
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424
E-mail: info@ledtronics.com
Website: http://www.ledtronics.com

LEDG24QU-8W-XxW-001AW (SERIES)

LED Light Bulb, CFL Style, 4 Pin G24Q Base
85~277Vac, Angle of illumination: 120°
Warm White(3000K), Natural White(4000K)



DWG BY:
UGC / GP
12-19-12

R&D:
UF
09-23-19

MFG:
LD
09-23-19

QA:
SB
09-23-19

REVISION LTR: E
ECR#: 091219-UF01
09-23-19

○ Features


Operating Temperature	-40°C to +50°C
Heatsink Temperature	30°C
Heatsink Material / Color	Extruded Aluminum / Silver
Base Material / Color	Polycarbonate / White
Lens Material / Color	Polycarbonate / Clear
LED LM80 Report	-
LM79 Report	-
LED Type / Qty.	SMD2835 / 40 pcs.
Dimmable	No
Life Span	50,000 hrs.
Warranty	3 Years
Weight	0.18 lbs. / 3 oz.



○ Electro-Optical Characteristics

Part Number	LEDG24QU-8W-XIW-001AW	LEDG24QU-8W-XWW-001AW
Input Voltage (typ)	85~277Vac	85~277Vac
Tested @ (Voltage)	120Vac	120Vac
Power Consumption	8W	8W
Current Consumption	0.065 A	0.065 A
Efficacy: (Lm/W)	80	90
Lumens	635 lm	705 lm
Max Ft-Cd	260 cd	275 cd
Power Factor	1.0	1.0
CRI (Ra)	>80	>80
CCT	2800K~3000K	3800K~4200K
Color	Warm White	Natural White
Angle of illumination	110° x 95°	115° x 100°

○ **Dimensions**

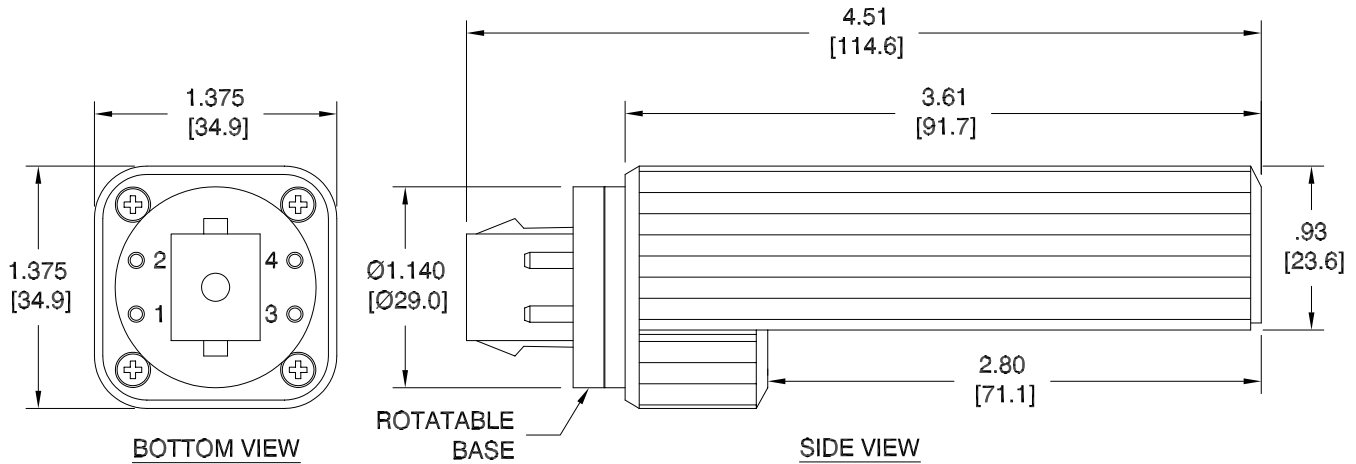

INPUT MAYBE APPLIED
TO THE FOLLOWING
COMBINATION OF PINS

- 1-3
- 1-4
- 2-3
- 2-4

Tolerance:

XXX +/- .010
XX +/- .025

Notes:

1. All Dimensions are in Inches [Millimeters].
2. If the previous non-LED lamp used a ballast or starter, they should be removed or bypassed.

Caution: Intended only for installation where the lamp is oriented horizontally, with light beaming downward.