

LEDG4BP-1.5W-XWW-012V

LED Miniature Low Voltage Lamp, Bi-Pin G4 Base
12Vdc/12Vac, Natural White, 4200K
Omnidirectional

DWG BY:
ETC / GP
12-20-12


R&D:
LUV
09-08-14

MFG:
LD
09-08-14

QA:
RD
09-05-14

REVISION LTR: A
ECR#: 081214-RTD01
09-04-14



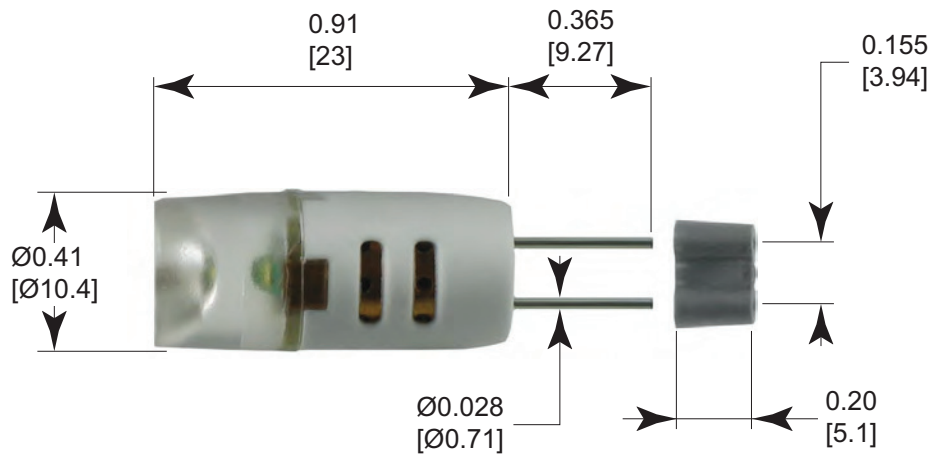

Notes:

1. All Dimensions are in Inches [mm].
2. Supplied with lead protector.
3. Usage: Indoor Lighting



○ **Electro-Optical Characteristics**

Input Voltage (typ)	12Vdc/Vac	
Tested @ (Voltage)	12Vdc	12Vac
Power Consumption	1.0W	1.0W
Current Consumption	0.090 A	0.110 A
Efficacy: (Lm/W)	-	-
Lumens	90 lm	75 lm
Max Ft-Cd	-	-
Power Factor	1.0	0.7
CRI (Ra)	-	-
CCT	4000K~4500K	
Color	Natural White	
Angle of illumination	Omnidirectional	

○ **Features**

Operating Temperature	-30°C to +50°C
Lens Material	Polycarbonate
Lens Color	Clear
Base Material	PBT
Base Color	White
LED LM80 Report	-
LM79 Report	-
Dimmable	No
Life Span	50,000 hrs.
Warranty	2 Years
Weight	0.0055 lbs.