

Product Catalog

August 1, 2016 - July 31, 2017

Direct Importer and Distributor of Quality
Holiday and Commercial Decorative Lighting



**DOWNTOWN
GRAPHICS
NETWORK** INC

we speak main street

www.dgninc.com

1409 S. Fulton St.
Salisbury, NC 28144

dgninc@dgninc.com
www.dgninc.com

Tel: (800) 884-0855 Or
(704) 637-0855

Terms and Conditions

Quality and Reliability

We carry an extensive line of fine Christmas lights and other top-quality decorative lighting products for all occasions. Our products are made by reputable manufacturers from overseas, highly acclaimed for their proven quality and reliability. Our long-term, forward-looking relationships with our suppliers ensure that our products are manufactured with quality materials and workmanship.

Pricing and Availability

Prices are subject to change without notice and are subject to availability of the products. We only charge credit cards at the time of actual product shipment; out of stock items are not charged until they are shipped.

A handling fee of \$8.00 will be charged to all orders less than \$100.00, excluding shipping charges and taxes. We charge \$8.00 for handling drop-ship orders.

Payment Terms

We accept Visa, MasterCard and American Express.

Please note that orders from new customers are shipped prepaid or on credit cards only.

Credit lines can be established upon credit approval and payment history. Please call or write for a credit application.

Once credit lines are established, payment terms are typically net 30 of invoice date. We invoice at the time of shipment of products.

A 1.75% per month fee is charged to all past due accounts. Slow-paying customers may be placed on credit hold, prepay status or credit card only status. NSF checks are subject to a fee of \$30.00.

Freight

Merchandise is shipped F.O.B. shipping point.

We do our best to have merchandise shipped within 1-2 business days after receipt of order. During high season (September - December), orders may take 2 business days to process. Orders received during the weekend are processed on the following business day. We use the most reliable carriers available in the market, whether we ship packages, pallets or containers. Www.dgninc.com is not responsible for deliveries that may be delayed due to events that are outside of our control.

Return Policy

Products may be returned only after receiving an RMA# (Return Merchandise Authorization) from Www.dgninc.com. Returns without an RMA# will not be accepted. Returns through no fault of Www.dgninc.com will be subject to a **20% restocking fee**. Shipping charges are not refundable. Returns must be shipped prepaid, in original packaging materials and in new condition. Consider insuring your shipment, as Www.dgninc.com is not liable for products lost or damaged en route to us.

To receive credit for defective merchandise, it must be returned to Downtown Graphics Network, Inc.; do not destroy or dispose of. Used merchandise, unless found to be defective within the warranty period, cannot be returned.

100% Guarantee

Our products are 100% guaranteed. Customer satisfaction and on-time delivery are our top priorities.

Please call or write for custom quotes or products. Products not listed in our catalog may be special ordered. We have strong relationships with our manufacturers and can work together to fulfill custom orders.

Return Policy (cont'd)

Shipping-related damages or discrepancies must be reported to the carrier immediately. Www.dgninc.com must be notified of any shipping discrepancies or product errors within 5 business days.

Custom ordered products are not returnable. Holiday products cannot be returned after December 15. **Absolutely no returns for any merchandise after 20 days of merchandise receipt.**

Limited Liability and Responsibility

Www.dgninc.com warrants its products to be free of defects in material and workmanship under normal use and service for a period of **90 days (non-LED products) and 1 year (LED products) from the date of shipment**. Please call or write for warranty claim instructions. Once the merchandise is received and examined by Downtown Graphics Network, Inc. and provided that the merchandise had not been misused or abused, at its discretion, will either repair or replace the merchandise. Warranty is voided for products not installed according to current local and/or National Electrical Codes (NEC).

Downtown Graphics Network, Inc. assumes no responsibility in any event for payment of incidental or consequential damages including, without limitation, costs relating to installation or reinstallation of the products, or damages to properties or personal injuries. Our maximum liability to you is the amount paid for your product. These products may induce electrical shocks to persons or fire hazards to properties if not installed properly or if altered in any way.

Downtown Graphics Network, Inc. disclaims all responsibility or liability for damages caused by viruses/malware contained at or within our websites or electronic communication.

Special Note on LED Warranty and Life Hours

Warranty period for LED products is 1 year from date of shipment. Non-dimmable LED bulbs should not be dimmed—doing so may damage the product and will void warranty. Dimmable LED bulbs should only be dimmed with LED-compatible dimmers—using dimmers not designed for LED may damage the product and will void warranty. Average life hours are estimated by the manufacturer under ideal laboratory conditions, and may vary from actual life hours of the product used in the field.

Typographical Errors & Price Updates

We are not responsible for typographical or pictorial errors. The photographs and diagrams included are for illustrative purposes only, and may not be exact. In the event there is a misprint, we reserve the right to correct pricing. We also reserve the right to inform our customers of any price updates or changes.

Table of Contents

HOLIDAY LIGHTING - LED



LED C7 and C9 Bulbs
Pg. 4



LED G30 and G40 Bulbs
Pg. 5



LED Light Strings
Pg. 6–8



LED Icicle and Net Lights
Pg. 8

HOLIDAY LIGHTING – INCANDESCENT



Icicle Lights and Net Lights
Pg. 9



Minilights
Pg. 10



Plugs, Plain Wire & Sockets
Pg. 11



C7 & C9 Strings and Spools
Pg. 12-13

C7/C9 ACCESSORIES, LIGHT STRINGS AND SPOOLS

C7 AND C9 BULBS, MOUNTING CLIPS



C7 and C9 Bulbs
Pg. 14 - 15



Mounting Clips
Pg. 16-17

LIGHTING FOR WEDDINGS/PARTIES/SPECIAL EVENTS



Commercial-grade Light Strings
Pg. 18–19, 28-29



LED Bulbs
Pg. 22-23, 25-27, 30-32, 34,36-37


LIGHTING FOR WEDDINGS/PARTIES/SPECIAL EVENTS






Sign and Tubular Miniature Bulbs
Pg. 39

AMUSEMENT LIGHTING

Look for these icons to quickly look up light type and compatibility!





Socket Size

- Candelabra (E12), 7/16" dia
-  Intermediate (E17), 5/8" dia
-  Medium (E26 or E27), 1" dia
- 

Bulb Material

-  Glass
-  Shatter-Resistant Plastic

Type of Light

- Incandescent
-  L.E.D.
- 

LED Holiday Lighting (E12, E17)

LED C7 and C9 Replacement Bulbs (Faceted Plastic Shell)



Amber Blue Green Red



Pink Purple White Yellow



Pink Purple White Yellow


LED C7, candelabra base (E12), 130V, 3 LEDs



Part #	Color	Packaging+
LDC7AM	Amber (orange)	25/500
LDC7BL	Blue	25/500
LDC7GR	Green	25/500
LDC7MU	Multi (Re/Gr/Bl/Am/Ye)	25/500
LDC7PI	Pink	25/500
LDC7PU	Purple	25/500
LDC7PW	Cool White	25/500
LDC7RE	Red	25/500
LDC7SWW	Sun Warm White	25/500
LDC7WW	Warm White	25/500
LDC7YE	Yellow	25/500
LDC7TWKSWW	Sun Warm White Twinkle	25/500

+Pieces per inner case/Pieces per master case

LED C9, intermediate base (E17), 130V, 5 LEDs



Part #	Color	Packaging+
LDC9AM	Amber (orange)	25/500
LDC9BL	Blue	25/500
LDC9GR	Green	25/500
LDC9MU	Multi (Re/Gr/Bl/Am/Ye)	25/500
LDC9PI	Pink	25/500
LDC9PU	Purple	25/500
LDC9PW	Cool White	25/500
LDC9RE	Red	25/500
LDC9SWW	Sun Warm White	25/500
LDC9WW	Warm White	25/500
LDC9YE	Yellow	25/500
LDC9TWKSWW	Sun Warm White Twinkle	25/500

+Pieces per inner case/Pieces per master case



Cool White Warm White Sun Warm White

What is the difference between the LED white colors?
Cool white casts an almost pure white light (7000K).
Warm white has a yellowish tint (3300K-3400K).
Sun warm white has a darker amber glow, similar to an incandescent clear light. Use this to most closely mimic incandescent clear light (2500K-2600K).

- Energy-saving and eco-friendly (reduce your power consumption by more than 90% compared with conventional incandescent bulbs)
- Bulb shells made of weather-resistant, break-resistant durable plastic; no glassparts
- LED lights produce little heat and are cooler to the touch
- Since LEDs are solid-state chips, they do not have delicate filaments that break
- Plug directly into household power (120V); no additional hardware needed
- Fits into any standard C7 and C9 sockets; no adapter needed
- Non-dimmable and dimmable available (use only LED-compatible dimmers)
- UL listed and CSA approved for indoor and outdoor use
- Manufactured by Minleon International
- 1 year limited factory warranty
- C7: 0.37W (non-dimmable)/0.96W (dimmable) actual power consumption, but use 2W for installation calculation purposes
- C9: 0.49W (non-dimmable)/0.96W (dimmable) actual power consumption, but use 2W for installation calculation purposes
- Average life hours: 30,000

LED Holiday Lighting (E17)

LED G30 Replacement Bulbs (Intermediate Base, Smooth Plastic Shells, 1-1/8" dia)

LED G30, UL listed, commercial grade, smooth finish (not faceted), intermediate (C9) base (E17), 1-1/8" diameter, nickel-plated brass base, 130 Volts, 5 LEDs per bulb for solid colors, 1 LED per bulb for color-changing



Part #	Color	Packaging+
LDG30SAM	Amber (orange)	25/500
LDG30SBL	Blue	25/500
LDG30SGR	Green	25/500
LDG30SMU	Multi (Re/Gr/Bl/Am/Ye)	25/500
LDG30SRE	Red	25/500
LDG30SSWW	Sun Warm White	25/500
LDG30SPW	Cool White	25/500
LDG30SYE	Yellow	25/500
LDG30SCC	Color-changing	25/500



+Pieces per inner case/Pieces per master case

- Non-dimmable and dimmable available (use only LED-compatible dimmers)
- UL listed and CSA approved for indoor and outdoor use
- Manufactured by Minleon International
- 1 year limited factory warranty
- G30 and G40: 0.49W (non-dimmable)/0.96W (dimmable) actual power consumption, but use 2W for installation calculation purposes
- Average life hours: 30,000

What is the difference between **sun warm white** and **cool white** colors?

Sun warm white light produced by LEDs most closely resembles a "clear" (slight amber) light given off by traditional incandescent bulbs (2500K-2600K).

Cool white casts an almost pure white light (7000K).

LED G40 Replacement Bulbs (Intermediate Base, Faceted Plastic Shells, 1-1/2" dia)

LED G40, UL listed, commercial grade, faceted, intermediate (C9) base (E17), 1-1/2" diameter, nickel-plated brass base, 130 Volts, 5 LEDs per bulb



Part #	Color	Packaging+
LDG40AM	Amber (orange)	25/500
LDG40BL	Blue	25/500
LDG40GR	Green	25/500
LDG40MU	Multi (Red, Green, Blue, Amber, Yellow)	25/500
LDG40PW	Cool White	25/500
LDG40RE	Red	25/500
LDG40SWW	Sun Warm White	25/500
LDG40YE	Yellow	25/500



+Pieces per inner case/Pieces per master case

LED Holiday Lighting

LED Light Strings: C7, C9, Polka Dot™, C6 (Strawberry), M5 Classic, M6, G12 (Raspberry)

Standard Grade (Full-Wave Rectified)



Approx. Bulb Length:

- M5 Classic: 7/8"
- Polka Dot: 1/4"
- G12: 1/2"
- M6: 7/8"
- C6: 1-1/4"
- C7: 1-1/2"
- C9: 2-1/2"

Minilight (Incandescent) M5 Classic (LED) Polka Dot (LED) G12 (LED) M6 (LED) C6 (LED) C7 (LED) C9 (LED)



C7 - warm white



C7: 25 lights, 8" spacing, 16.7 ft, green wire

Part#	Light	Packaging
L25C7PMU	Multi	24/case
L25C7PWH	Cool White	24/case
L25C7PWW	Warm White	24/case



C9 - warm white



C9: 25 lights, 8" spacing, 16.7 ft, green wire

Part#	Light	Packaging
L25C9PMU	Multi	24/case
L25C9PWH	Cool White	24/case
L25C9PWW	Warm White	24/case



M5 Mini Classic—warm white



M5 Mini Classic: 70 lights, 4" spacing, 23.7 ft, smooth (non-faceted) finish, green wire

Part#	Light	Packaging
L70M5CPWH	Cool White	24/case
L70M5CPWW	Warm White	24/case

Specifications for standard-grade LED light strings:

- UL listed for indoor and outdoor use
- FWR (Full-Wave Rectification) technology
- 6" x 4" x 6" spacing (70LT strings) or 6" x 8" x 6" spacing (25LT strings)
- Green, white or brown cord
- 22 AWG wire
- 3 Amp fused plug
- 4.8W per string (70LT strings) or 2.4W per string (25LT strings)
- Strings with 25 lights are 16.7' long; strings with 70 lights are 23.7' long
- 24 strings per case
- Not dimmable
- 70LT strings are end-to-end connectable up to 44 sets (approx. 1,040 feet); 25LT strings are end-to-end connectable up to 88 sets (approx. 1,450 feet)



M6 - white wire, warm white bulbs



M6: 70 lights, 4" spacing, 23.7 ft

Part#	Light	Wire	Packaging
L70M6PBL	Blue	Green	24/case
L70M6PGR	Green	Green	24/case
L70M6PMU	Multi	Green	24/case
L70M6POR	Orange	Green	24/case
L70M6PPI	Pink	Green	24/case
L70M6PPU	Purple	Green	24/case
L70M6PRE	Red	Green	24/case
L70M6PWH	Cool White	Green	24/case
L70M6PWW	Warm White	Green	24/case
L70M6PYE	Yellow	Green	24/case
L70M6PWWH	Cool White	White	24/case
L70M6PWWW	Warm White	White	24/case

LED Holiday Lighting

LED Light Strings: C7, C9, Polka Dot™, C6 (Strawberry), M5 Classic, M6, G12 (Raspberry) Standard Grade (Full-Wave Rectified)



Polka Dot - multi



Polka Dot - white wire



Polka Dot - brown wire

NEW!



C6 (Strawberry) - multi

Polka-Dot: 70 lights, 4" spacing, 23.7 ft



Part#	Light	Wire	Packaging
L70PDPBL	Blue	Green	24/case
L70PDPGR	Green	Green	24/case
L70PDPMU	Multi	Green	24/case
L70PDPOR	Orange	Green	24/case
L70PDPPI	Pink	Green	24/case
L70PDPPI	Pink	Green	24/case
L70PDPPU	Purple	Green	24/case
L70PDPRE	Red	Green	24/case
L70PDPWH	Cool White	Green	24/case
L70PDPWW	Warm White	Green	24/case
L70PDPYE	Yellow	Green	24/case
L70PDPWWH	Cool White	White	24/case
L70PDPWWW	Warm White	White	24/case
L70PDPBRWW	Warm White	Brown	24/case

C6: 70 lights, 4" spacing, 23.7 ft, green wire



Part#	Light	Packaging
L70C6PBL	Blue	24/case
L70C6PGR	Green	24/case
L70C6PMU	Multi	24/case
L70C6PRE	Red	24/case
L70C6PWH	Cool White	24/case
L70C6PWW	Warm White	24/case



G12 (Raspberry) - warm white



G12: 70 lights, 4" spacing, 23.7 ft, green wire

Part#	Light	Packaging
L70G12PBL	Blue	24/case
L70G12PGR	Green	24/case
L70G12PMU	Multi	24/case
L70G12PRE	Red	24/case
L70G12PWH	Cool White	24/case
L70G12PWW	Warm White	24/case

- UL listed for indoor and outdoor use
- FWR technology gives these lights brighter colors and flicker-free light compared to conventional lights and lower-performance LEDs
- Energy-efficient and environmentally-friendly (reduce power consumption by more than 90% compared with conventional bulbs)
- Bulbs are permanently molded to the socket (**1-piece mold construction**), making these light strings waterproof, tamper-resistant and resistant to corrosion
- 1 year limited warranty
- Standard grade light strings with 70 lights are end-to-end connectable up to 44 sets (88 sets for 25-light strings), resulting in total length of more than 1,000 feet (maximum of 210W per circuit)
- Light strings plug directly into household power (120V); no additional hardware needed
- Lenses are made of weather-resistant, break-resistant durable plastic; no glass bulbs
- LED lights are safer, as they produce little heat and are cool to the touch
- Since LEDs are solid-state chips, they do not have delicate filaments that break
- Low maintenance, long-lasting light strings require less man-hours to repair or replace

LED Holiday Lighting

Twinkle LED Polka Dot™ Light Strings Standard Grade (Full-Wave Rectified)




Part #	Description	Packaging
L70PDTWKWH	Twinkle LED Polka Dot Light String, green cord, cool white , 70 lights, 4" spacing, 23.7 feet, every 4th bulb twinkles , UL, FWR, plugs directly to outlet (120V)	24/case
L70PDTWKWW	Twinkle LED Polka Dot Light String, green cord, warm white , 70 lights, 4" spacing, 23.7 feet, every 4th bulb twinkles , UL, FWR, plugs directly to outlet (120V)	24/case
L70PDTWKWWW	Twinkle LED Polka Dot Light String, white cord, warm white , 70 lights, 4" spacing, 23.7 feet, every 4th bulb twinkles , UL, FWR, plugs directly to outlet (120V)	24/case



Polka Dot (close-up)

LED Icicle Lights (M6) Standard Grade (Full-Wave Rectified)

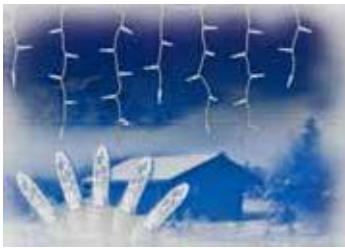

- UL listed
- Indoor and outdoor use
- Warm white or cool white lights
- 22AWG wire
- End-to-end connectable up to 44 sets (max 210W per circuit)
- Each light string includes 15 drops, 6" spacing between drops, 3 to 6 bulbs per drop; 3" spacing between bulbs, longest drop 18", shortest drop 9"
- Total lighted length of 7', total cord length of 8'
- 4.8W per string
- Steady lights (non-twinkle, non-flashing)



Part #	Description	Packaging
LICL70M6WH	LED Icicle Light String, 70 M6 lights, WHITE cord, cool white bulbs	24/case
LICL70M6WW	LED Icicle Light String, 70 M6 lights, WHITE cord, warm white bulbs	24/case
LICL70M6GWW	LED Icicle Light String, 70 M6 lights, GREEN cord, warm white bulbs	24/case

LED Net Lights (Polka-Dot) Standard Grade (Full-Wave Rectified)



- UL listed
- Indoor and outdoor use
- 22AWG wire
- End-to-end connectable up to 30 sets (max 210W per circuit)
- 7W per net
- Net lights have a 6" lead and 4" tail
- Steady lights (non-twinkle, non-flashing)




Part #	Description	Packaging
LNL100PDGWW	LED Net Light, 100 Polka-Dot lights, 4' x 6', green cord, warm white bulbs	12/case
LNL100PDWWW	LED Net Light, 100 Polka-Dot lights, 4' x 6', white cord, warm white bulbs	12/case

Incandescent Holiday Lighting

Incandescent Icicle Lights



- UL listed
- Indoor and outdoor use
- End-to-end connectable up to 3 sets
- Each light string includes 27 drops, 4 to 7 bulbs per drop, 6" spacing between drops; longest drop 20", shortest drop 10"
- Total lighted length of 13', total cord length of 15'
- 2.5 Volts, 170mA, .42W (each bulb)



Part #	Description	Packaging
ICLGCLB	Icicle Light String, 150 lights, 15' cord, green cord, clear bulbs, packed in box	20/case
ICLWCLB	Icicle Light String, 150 lights, 15' cord, white cord, clear bulbs, packed in box	20/case

Incandescent Net Lights

Net Lights, 150 minilight bulbs



- UL listed for indoor and outdoor use
- Wrap around bushes, tree trunks and columns
- End-to-end connectable up to 3 sets
- 22 AWG wire



Part #	Dim	Wire	Bulb	Packaging
NL150BRCL	4'x6'	Brown	Clear	12/case
NL150GCL	4'x6'	Green	Clear	12/case
NL150WCL	4'x6'	White	Clear	12/case
NL150FWF	4'x6'	White	Frosted	12/case
NL212150GCL	2'x12'	Green	Clear	12/case
NL212150WCL	2'x12'	White	Clear	12/case
NL212150FWF	2'x12'	White	Frosted	12/case
NL28150BRCL	2'x8'	Brown	Clear	12/case
NL28150GCL	2'x8'	Green	Clear	12/case
NL28150WCL	2'x8'	White	Clear	12/case
NL28150FWF	2'x8'	White	Frosted	12/case



Commercial-Grade Minilights with Lamp Locks



- UL listed for indoor and outdoor use
- Rated for 2,500 hours
- 22AWG wire
- Lamp locks helps make these strings tamper-resistant
- Maximum # of end-to-end connectable sets:
35LT: 14 sets
50LT: 10 sets
100LT: 5 sets

Minilights w/ lamp locks, 5" spacing, green cord, clear bulbs

Part #	# of Lights	Length	Packaging
MNLK35GCL	35	15 ft.	50/case
MNLK50GCL	50	21.25 ft.	50/case
MNLK100GCL	100	42 ft.	25/case



Incandescent Holiday Lighting

Commercial-Grade Minilights

- Heavy-duty commercial grade
- UL listed for indoor and outdoor use
- 22AWG wire
- Rated for 2,500 hours
- **If one bulb burns out and is not removed, the remaining bulbs stay lit**
- 0.42 Watts/bulb
- Maximum # of end-to-end connectable sets (connectable up to approx. 210 ft):
 - 35LT: 14 sets
 - 50LT: 10 sets
 - 100LT: 5 sets



Minilights - green cord, clear bulbs



Minilights - white cord, clear bulbs

Minilights w/ 20 lights, 4" spacing, 9 ft., no end connector



Part #	Light	Wire	Packaging
MNL20WCLNE	Clear	White	50/case

Minilights w/ 35 lights, 5" spacing, 15 ft., end-to-end



Part #	Light	Wire	Packaging
MNL35GCL	Clear	Green	50/case
MNL35GMU	Multi	Green	50/case
MNL35WCL	Clear	White	50/case

Minilights w/ 50 lights, 5" spacing, 21-1/4 ft., end-to-end




Part #	Light	Wire	Packaging
MNL50BRCL	Clear	Brown	50/case
MNL50GAM	Amber	Green	50/case
MNL50GBL	Blue	Green	50/case
MNL50GCL	Clear	Green	50/case
MNL50GFW	Frosted	Green	50/case
MNL50GGR	Green	Green	50/case
MNL50GMU	Multi	Green	50/case
MNL50GPI	Pink	Green	50/case
MNL50GPU	Purple	Green	50/case
MNL50GRE	Red	Green	50/case
MNL50GYE	Yellow	Green	50/case
MNL50WCL	Clear	White	50/case
MNL50WFW	Frosted	White	50/case

Minilights w/ 50 lights, 6" spacing, 25-1/2 ft., end-to-end



Part #	Light	Wire	Packaging
MNL50GCL6	Clear	Green	50/case

Minilights w/ 50 lights, 6" spacing, 25-1/2 ft., end-to-end, every 4th bulb twinkles (flashes)



Part #	Light	Wire	Packaging
MNL50GCL6TWK	Clear	Green	50/case

Minilights w/ 100 lights, 5" spacing, 42 ft., end-to-end



Part #	Light	Wire	Packaging
MNL100BRCL	Clear	Brown	25/case
MNL100GAM	Amber	Green	25/case
MNL100GBL	Blue	Green	25/case
MNL100GCL	Clear	Green	25/case
MNL100GFW	Frosted	Green	25/case
MNL100GGR	Green	Green	25/case
MNL100GMU	Multi	Green	25/case
MNL100GPI	Pink	Green	25/case
MNL100GPU	Purple	Green	25/case
MNL100GRE	Red	Green	25/case
MNL100GYE	Yellow	Green	25/case
MNL100WCL	Clear	White	25/case
MNL100WFW	Frosted	White	25/case

Minilights w/ 100 lights, 6" spacing, 50 ft., end-to-end




Part #	Light	Wire	Packaging
MNL100GCL6	Clear	Green	25/case



C7 and C9 Accessories

Power Plugs

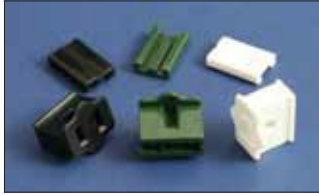

Female Slip-In Quick Plugs



Male Slip-In Quick Plugs



Female and Male Rubber Plugs

Slip-In Quick Plugs, UL listed, for use with C7/C9 strings and spools

Part #	Description	Packaging
SIPLGMBL	Male Slip-In Quick Plug, 10 Amps, SPT-1, black	12/case
SIPLGMGR	Male Slip-In Quick Plug, 10 Amps, SPT-1, green	12/case
SIPLGMWH	Male Slip-In Quick Plug, 10 Amps, SPT-1, white	12/case
SIPLGFBL	Female Slip-In Quick Plug, 10 Amps, SPT-1, black	12/case
SIPLGFGR	Female Slip-In Quick Plug, 10 Amps, SPT-1, green	12/case
SIPLGFWH	Female Slip-In Quick Plug, 10 Amps, SPT-1, white	12/case
SIPLGMBL2	Male Slip-In Quick Plug, 10 Amps, SPT-2, black	12/case
SIPLGMGR2	Male Slip-In Quick Plug, 10 Amps, SPT-2, green	12/case
SIPLGMWH2	Male Slip-In Quick Plug, 10 Amps, SPT-2, white	12/case
SIPLGFBL2	Female Slip-In Quick Plug, 10 Amps, SPT-2, black	12/case
SIPLGFGR2	Female Slip-In Quick Plug, 10 Amps, SPT-2, green	12/case
SIPLGFWH2	Female Slip-In Quick Plug, 10 Amps, SPT-2, white	12/case

Heavy-Duty Rubber Plugs, 15 Amps, UL listed, for use with our commercial-grade patio light strings

Part #	Description	Packaging
PLGMBK	Male Rubber Plug, Black	10/case
PLGMWH	Male Rubber Plug, White	10/case
PLGFBK	Female Rubber Plug, Black	10/case
PLGFWH	Female Rubber Plug, White	10/case

Plain Wire "Lamp Cord"

Part #	Description	Packaging
WR18W100210	White Lead Wire, 100 ft., 18AWG, SPT-2, w/ male plug	10/case
WR18G1000	Green Lead Wire, 1,000 ft., 18AWG, SPT-1	1/case
WR18W1000	White Lead Wire, 1,000 ft., 18AWG, SPT-1	1/case
WR18BR10002	Brown Lead Wire, 1,000 ft., 18AWG, SPT-2	1/case
WR18G10002	Green Lead Wire, 1,000 ft., 18AWG, SPT-2	1/case NEW!
WR18W10002	White Lead Wire, 1,000 ft., 18AWG, SPT-2	1/case



100' Lead Wire w/ Male Plug



1000' Wire - White



1000' Wire - Green

Rubber O Rings for C7 and C9 Sockets **NEW!**

Part #	Description	Packaging+
HOSKRRC7GR	Rubber O Ring for C7 green socket	100/3,000
HOSKRRC9GR	Rubber O Ring for C9 green socket	100/2,000



Twist-On Pin Sockets

- UL Component recognized for indoor use only
- Use with twisted round wire, not for flat SPT wire

Part #	Description	Packaging+
E17TPS	Twist-On Pin Socket, intermediate base, black	50/600
E26TPS	Twist-On Pin Socket, medium base, black	25/375

+Pieces per inner case/Pieces per outer case

Holiday Lighting Sockets



- UL Component recognized
- For indoor and outdoor use
- For SPT-1 or SPT-2 wire

Part #	Description	Packaging+
HOSKC7GR	C7 socket and cap, green, SPT-1	50/1,000
HOSKC7WH	C7 socket and cap, white, SPT-1	50/1,000
HOSKC9GR	C9 socket and cap, green, SPT-1	50/1,000
HOSKC9WH	C9 socket and cap, white, SPT-1	50/1,000
HOSKC7GR2	C7 socket and cap, green, SPT-2	50/1,000
HOSKC7WH2	C7 socket and cap, white, SPT-2	50/1,000
HOSKC9GR2	C9 socket and cap, green, SPT-2	50/1,000
HOSKC9WH2	C9 socket and cap, white, SPT-2	50/1,000

+Pieces per inner case/Pieces per outer case

C7 and C9 Light Strings and Spools

C7 and C9 Light Strings - 25 ft., 50 ft. and 100 ft.

- Bulbs sold separately
- For indoor and outdoor use
- **Maximum run of 7 Amps (840W) for SPT-1 wire - do not connect more than 840 Watts end-to-end**
- Made with UL components
- 25' and 50' light strings are end-to-end connectable (have female connectors)
- 100' light string comes only with a male plug



25' C7 Light String – Green



50' C7 Light String - White



C7 Light String, 12" spacing, 18AWG, SPT-1, candelabra (E12) base

(CAN)

Part #	Length	Color	End-to-end Connectable	Packaging	
XSC25W12F	25 ft.	White	Yes	25/case	EW!
XSC50BK12EF	50 ft.	Black	Yes	10/case	NEW!
XSC50G12EF	50 ft.	Green	Yes	10/case	
XSC50W12EF	50 ft.	White	Yes	10/case	
XSC100BK12F	100 ft.	Black	No	5/case	NEW!
XSC100G12F	100 ft.	Green	No	5/case	
XSC100W12F	100 ft.	White	No	5/case	

C9 Light String, 12" spacing, 18AWG, SPT-1, intermediate (E17) base

(INT)

Part #	Length	Color	End-to-End Connectable	Packaging	
XSI25BK12F	25 ft.	Black	Yes	25/case	NEW!
XSI25G12F	25 ft.	Green	Yes	25/case	
XSI25W12F	25 ft.	White	Yes	25/case	
XSI50BK12EF	50 ft.	Black	Yes	10/case	NEW!
XSI50G12EF	50 ft.	Green	Yes	10/case	
XSI50W12EF	50 ft.	White	Yes	10/case	
XSI100BK12F	100 ft.	Black	No	5/case	NEW!
XSI100G12F	100 ft.	Green	No	5/case	
XSI100W12F	100 ft.	White	No	5/case	

Standard-Grade C9 Spool, Black, 18ga, SPT-2, Intermediate Base (E17)

Standard-Grade C9 Spool, intermediate base, 18 gauge, SPT-2, 12" spacing

(INT)

Part #	Color of Wire	Length (ft.)	# of Sockets	Socket Type	Wire	Max. Wattage	Packaging
XSI500BK122	Black	500	500	Standard C9	18/SPT-2	1,200W (10 Amps)	1/case




- Plugs and light bulbs sold separately.
- Compatible with any of our intermediate base (E17) bulbs.
- Use black Slip In Quick Plugs (SPT-2) listed on page 11
- SPT-2 wire rated for 10 Amps (1,200 Watts)

C7 and C9 Light Strings and Spools

C7 and C9 Bulk Spools (SPT-1 and SPT-2) - 500 ft. and 1,000 ft.

- Maximum run of 7 Amps (840W) for SPT-1 and 10 Amps (1,200W) for SPT-2
- Plugs and light bulbs sold separately
- For indoor and outdoor use
- UL components

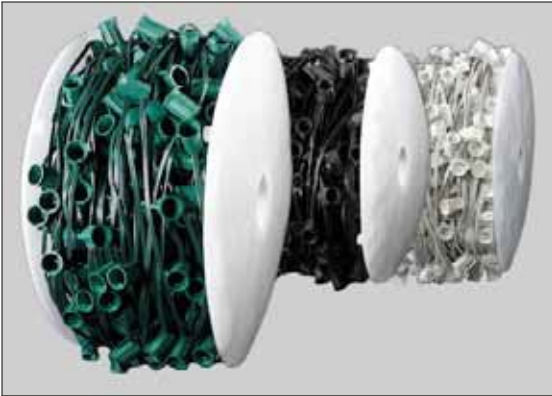

C7 Bulk Spool, 18AWG, candelabra base (E12), plugs sold separately

CAN

Part #	Length	Spacing	Color	SPT	Sockets
XSC500G12	500 ft.	12"	Green	1	500
XSC500W12	500 ft.	12"	White	1	500
XSC1000G6	1,000 ft.	6"	Green	1	2,000
XSC1000W6	1,000 ft.	6"	White	1	2,000
XSC1000G9	1,000 ft.	9"	Green	1	1,333
XSC1000W9	1,000 ft.	9"	White	1	1,333
XSC1000BK12	1,000 ft.	12"	Black	1	1,000 NEW!
XSC1000G12	1,000 ft.	12"	Green	1	1,000
XSC1000W12	1,000 ft.	12"	White	1	1,000
XSC1000G15	1,000 ft.	15"	Green	1	800
XSC1000W15	1,000 ft.	15"	White	1	800
XSC1000G18	1,000 ft.	18"	Green	1	666
XSC1000W18	1,000 ft.	18"	White	1	666
XSC1000G24	1,000 ft.	24"	Green	1	500
XSC1000W24	1,000 ft.	24"	White	1	500
XSC1000G36	1,000 ft.	36"	Green	1	333
XSC1000G122	1,000 ft.	12"	Green	2	1,000
XSC1000W122	1,000 ft.	12"	White	2	1,000

C9 Bulk Spool, 18AWG, intermediate base (E17), plugs sold separately

INT

Part #	Length	Spacing	Color	SPT	Sockets
XSI500G12	500 ft.	12"	Green	1	500
XSI500W12	500 ft.	12"	White	1	500
XSI500G15	500 ft.	15"	Green	1	400
XSI500G18	500 ft.	18"	Green	1	333
XSI1000G6	1,000 ft.	6"	Green	1	2,000
XSI1000W6	1,000 ft.	6"	White	1	2,000
XSI1000G9	1,000 ft.	9"	Green	1	1,333
XSI1000W9	1,000 ft.	9"	White	1	1,333
XSI1000BK12	1,000 ft.	12"	Black	1	1,000 NEW!
XSI1000G12	1,000 ft.	12"	Green	1	1,000
XSI1000W12	1,000 ft.	12"	White	1	1,000
XSI1000G15	1,000 ft.	15"	Green	1	800
XSI1000W15	1,000 ft.	15"	White	1	800
XSI1000G18	1,000 ft.	18"	Green	1	666
XSI1000W18	1,000 ft.	18"	White	1	666
XSI1000G24	1,000 ft.	24"	Green	1	500
XSI1000W24	1,000 ft.	24"	White	1	500
XSI1000G36	1,000 ft.	36"	Green	1	333
XSI1000W36	1,000 ft.	36"	White	1	333
XSI1000G48	1,000 ft.	48"	Green	1	250
XSI1000W48	1,000 ft.	48"	White	1	250
XSI1000G122	1,000 ft.	12"	Green	2	1,000
XSI1000W122	1,000 ft.	12"	White	2	1,000
XSI1000G152	1,000 ft.	15"	Green	2	800 NEW!

C7 and C9 Incandescent Bulbs

C7 Replacement Bulbs

- Commercial grade bulbs
- Brass base, double dip transparent colors
- 4W, 5W and 7W candelabra base (E12)
- Average rated life - regular bulbs: 3,000 hours; twinkle bulbs: 2,000 hours

C7 Transparent Colors



C7 Bulb, candelabra (E12) base, 130V, transparent colors CAN INC GLS

Part #	Color	Watts	Pkg+
4C7CL	Clear	4	25/1000
5C7CL	Clear	5	25/1000
5C7TA	Tr. Amber	5	25/1000
5C7TB	Tr. Blue	5	25/1000
5C7TG	Tr. Green	5	25/1000
5C7TMU	Tr. Multi (Bl, Gr, Am, Re, Pi)	5	25/1000
5C7TPI	Tr. Pink	5	25/1000
5C7TPU	Tr. Purple	5	25/1000
5C7TR	Tr. Red	5	25/1000
5C7TY	Tr. Yellow	5	25/1000

+Pieces per inner case/Pieces per master case

C7 Bulb, candelabra (E12) base, 130V, transparent colors CAN INC GLS

Part #	Color	Watts	Pkg+
7C7CL	Clear	7	25/1000
7C7TA	Tr. Amber	7	25/1000
7C7TB	Tr. Blue	7	25/1000
7C7TG	Tr. Green	7	25/1000
7C7TMU	Tr. Multi (Bl, Gr, Am, Re, Pi)	7	25/1000
7C7TPI	Tr. Pink	7	25/1000
7C7TPU	Tr. Purple	7	25/1000
7C7TR	Tr. Red	7	25/1000
7C7TY	Tr. Yellow	7	25/1000

+Pieces per inner case/Pieces per master case

C7 Ceramic Colors



C7 Bulb, candelabra (E12) base, 130V, ceramic colors CAN INC GLS

Part #	Color	Watts	Pkg+
7C7BL	Ceramic Blue	7	25/1000
7C7GR	Ceramic Green	7	25/1000
7C7OR	Ceramic Orange	7	25/1000
7C7RE	Ceramic Red	7	25/1000
7C7WH	Ceramic White	7	25/1000
7C7YE	Ceramic Yellow	7	25/1000

+Pieces per inner case/Pieces per master case

C7 Clear (Twinkle)



C7 Bulb, candelabra (E12) base, 130V, clear, twinkle (flashing) CAN INC GLS

Part #	Color	Watts	Pkg+
7C7TWKCL	Clear	7	25/1000

+Pieces per inner case/Pieces per master case

C7 and C9 Incandescent Bulbs

C9 Replacement Bulbs

- Commercial grade bulbs
- Brass base, double dip transparent colors
- 7W, 10W intermediate base (E17)
- Average rated life—regular bulbs: 3,000 hours; twinkle bulbs: 2,000 hours

C9 Transparent Colors



C9 Bulb, intermediate (E17) base, 130V, transparent colors



Part #	Color	Watts	Pkg+
7C9CL	Clear	7	25/1000
7C9TA	Tr. Amber	7	25/1000
7C9TB	Tr. Blue	7	25/1000
7C9TG	Tr. Green	7	25/1000
7C9TMU	Tr. Multi (Bl, Gr, Re, Am, Pi)	7	25/1000
7C9TPI	Tr. Pink	7	25/1000
7C9TPU	Tr. Purple	7	25/1000
7C9TR	Tr. Red	7	25/1000
7C9TY	Tr. Yellow	7	25/1000
10C9CL	Clear	10	25/1000

+Pieces per inner case/Pieces per master case

C9 Ceramic Colors



C9 Light , intermediate (E17) base, 130V, ceramic colors



Part #	Color	Watts	Pkg+
7C9BL	Ceramic Blue	7	25/1000
7C9GR	Ceramic Green	7	25/1000
7C9OR	Ceramic Orange	7	25/1000
7C9RE	Ceramic Red	7	25/1000
7C9TWKCL	down twinkle (flashing) White	7	25/1000
7C9YE	Ceramic Yellow	7	25/1000
7C9TWKCL	Clear	7	25/1000

+Pieces per inner case/Pieces per master case

C7 and C9 Accessories

Plastic Mounting Accessories

To be used for 1 holiday season (90 days) only

All-In-One C Clip Swivel



Part #21412
Attaches mini, icicles and C7/C9 lights to gutters. Swivel to rotate orientation of lights.

Universal Light Stake, 4-1/2"



Part #39021
These black 4-1/2" long stakes hold minilight, C7 and C9 lights along driveways, walkways and patios.

Gutter C Clip



Part #31005
Attach C7/C9 lights to gutters easily and snugly.

ORIGINAL All-In-One Clip



Part #39032
Accommodates C7, C9 or minilight strings. They can be slipped under roof shingles or clipped onto gutters.

Shingle Tab



Part # 39001
Shingle Tabs hold C7 and C9 light strings in a horizontal position. Slip them under roof shingles or use them with Parapet Clips on flat surfaces.

Minilight Adhesive Clip



Part #39095
Mini Light Adhesive Clips firmly hold minilights to adhere to most surfaces. Installation and removal are quick and easy (indoor use only)

C Clip Open End



Part # 39006
"C" Clips are designed to be used on all types of flat surfaces. Install them permanently on concrete using silicone, on metal using adhesive magnets or on wood using screws. Fits C7 and C9 light strings.

All-In-One Light Stake, 7-1/2"



Part #39141
These green 7-1/2" long stakes hold minilight, C7 and C9 lights along driveways, walkways and patios.

Parapet Clip



Part #39007
Parapet Clips are designed to be used in conjunction with Shingle Tabs. Install the clips on concrete using silicone or on wood using screws.

All-In-One Clip PLUS



Part #39301
Accommodates C7, C9 or minilight strings. They can be slipped under roof shingles or clipped onto gutters.

Part #	Description	Packaging+
21412B	All-In-One C Clip Swivel	1000
31005A	Gutter C Clip	2000
39001C	Shingle Tab	500
39006A/39006C	C Clip Open End	2000/500
39007A/39007C	Parapet Clip	2000/500

Part #	Description	Packaging+
39021A/39021C	Universal Light Stake, 4.5"	2000/500
39032A/39032C	ORIGINAL All-In-One Clip	2000/500
39095A/39095C	Mini Light Adhesive Clip	2000/500
39141C	All-In-One Light Stake - 7.5"	500
39301A/39301C	All-In-One Clip PLUS	2000/500

+Pieces per packaging: A - 2,000, B - 1,000; C - 500

Lighting for Weddings/Parties/Tent Events

Starlight Sphere Ornaments

- UL listed for indoor/outdoor use
- 12" lead cord
- 50LT connectable up to 10 spheres; 100LT connectable up to 5 spheres



Part #	Description	Packaging
STRWWH6	Starlight Sphere, 6" dia., white sphere, 50 clear lights	12/case
STRWWH6TWK	Starlight Sphere, 6" dia., white sphere, 50 clear lights, every 4th bulb twinkles	12/case
STRWWH75	Starlight Sphere, 7.5" dia., white sphere, 100 clear lights	12/case
STRWWH75TWK	Starlight Sphere, 7.5" dia., white sphere, 100 clear lights, every 4th bulb twinkles	12/case

Steel Cables for Hanging our Commercial-Grade Light Strings

Galvanized steel cable, 1/16" diameter, for use with our commercial-grade strings only, for outdoor use

Part #	Length	Includes 1 snap hook (attached) and 1 loose cable clip	Packaging+
CBL60	60'	Yes	1/10
CBL110	110'	Yes	1/10
CBL350	350'	No	1

+Packaging: Pieces per inner case/pieces per master case


Cable clip (req'd for use with our steel cables). No tools required

Part #	Packaging+
CBLGRP2	1/10

- Note: Our steel cables have a load rating of 100 lbs, however they should be used only for hanging our light strings. Do not use as a safety device for supporting human weight.



350' Spool (L), 110' Cable (R), Cable Clips (R)

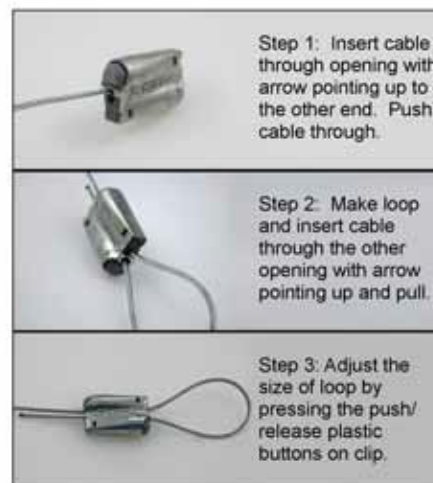

Snap Hook (comes pre-attached on our 60' and 110' cables)



Loops can be created with the cable clip, without the need for additional tools

Commercial-Grade Heavy-Duty Light Strings, Medium Base Sockets

- Designed for year-round, outdoor use or temporary use requiring constant installations and take downs
- Heavy-duty 16AWG SPT-2 wire is robust enough for commercial use, but light enough for easy installation
- PVC encapsulated sockets with brass contacts are resistant to UV sunlight exposure
- Sockets are designed to ensure a snug, weather-resistant seal around lamp bases
- Recommended maximum wattage per medium base socket: 15 Watts
- Maximum run per circuit: 960 Watts (8 Amps) for 48 ft., 54 ft. and 106 ft.; 1,200 Watts (10 Amps) for 330 ft.
- The 48 ft. string includes a 1 ft. lead and a 1 ft. tail
- The 54 ft. and 106 ft. strings include a 6 ft. lead from the male plug to the first socket
- **Not UL listed (only wire and plugs are UL components)**
- **Light bulbs sold separately**
- **48 ft. string is end-to-end connectable; 54 ft. and 106 ft. strings are NOT end-to-end connectable**



Suspended Medium Base Sockets with 11S14 Light Bulbs (clear)



Suspended Medium Base Socket with A15 Light Bulbs (frosted)



In-Line Medium Base Socket with LED S14 Classic Light Bulb (warm white)




In-Line Medium Base Socket with 11S14 Light Bulb (clear)

Intermediate Base
In-line Socket
(see pg. 28)

Medium Base
In-line Socket
(see pg. 19)

Medium Base
Suspended Socket
(see pg. 19)

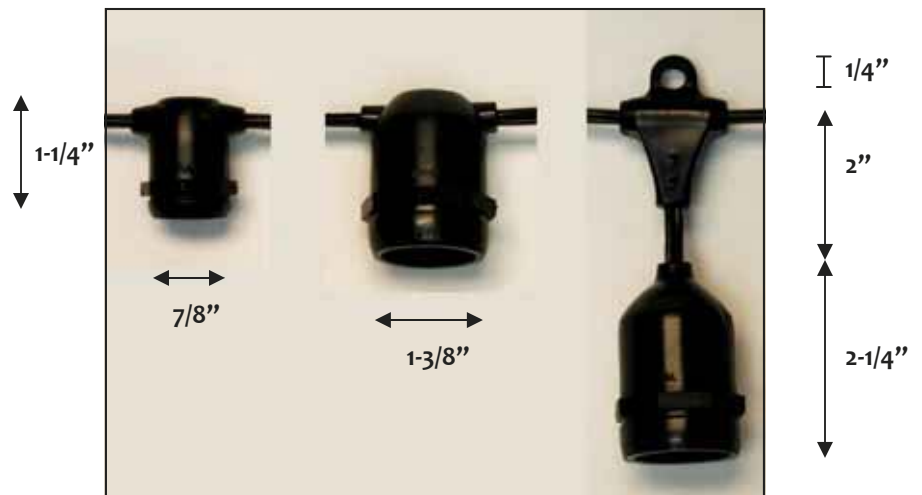


The medium base SUSPENDED SOCKET drops a few inches from the main wire, and allows for cables to be attached to the eyelets using zip ties or other similar accessories. Note the eyelet hole is perpendicular to the main wire.

Lighting for Weddings/Parties/Tent Events (E26/E27)

Commercial-Grade Heavy-Duty Light Strings, Medium Base Sockets

Commercial-Grade Heavy-Duty Light String, medium base in-line sockets, 48 ft., END-TO-END CONNECTABLE

MED **NEW!**

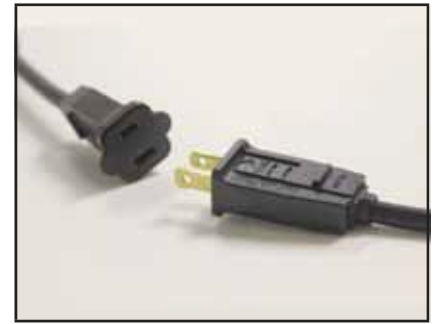

Part #	Color	Length	# of Sockets	End-to-End Connect	Packaging
LSM2448BKEC	Black	48 ft.	24	Yes	8/case
LSM2448WHEC	White	48 ft.	24	Yes	8/case

Commercial-Grade Heavy-Duty Light String, medium base in-line sockets, 24" spacing

MED



Part #	Color	Length	# of Sockets	6' lead with plug	Packaging
LSM2448BKF	Black	54 ft.	24	Yes	8/case
LSM2448GRF	Green	54 ft.	24	Yes	8/case
LSM2448WHF	White	54 ft.	24	Yes	8/case
LSM24102BKF	Black	106 ft.	50	Yes	4/case
LSM24102GRF	Green	106 ft.	50	Yes	4/case
LSM24102WHF	White	106 ft.	50	Yes	4/case
LSM24330BK	Black	330 ft.	165	No	1/case
LSM24330GR	Green	330 ft.	165	No	1/case
LSM24330WH	White	330 ft.	165	No	1/case

Commercial-Grade Heavy-Duty Light String, medium base suspended sockets, 24" spacing

MED



Weather-resistant Sockets

Part #	Color	Length	# of Sockets	6' lead with plug	Packaging
LSMS2448BKF	Black	54 ft.	24	Yes	8/case
LSMS2448GRF	Green	54 ft.	24	Yes	8/case
LSMS2448WHF	White	54 ft.	24	Yes	8/case
LSMS24102BKF	Black	106 ft.	50	Yes	4/case
LSMS24102GRF	Green	106 ft.	50	Yes	4/case
LSMS24102WHF	White	106 ft.	50	Yes	4/case
LSMS24330BK	Black	330 ft.	165	No	1/case
LSMS24330GR	Green	330 ft.	165	No	1/case
LSMS24330WH	White	330 ft.	165	No	1/case



Maximum 1,200 Watts per run for the 330 ft. spools:

Lamp Wattage :	Any of our LED bulbs (<2W)	11S14 (11W)	A15, G50 (15W)
Max. Run (# of Sockets):	330 ft. (165 sockets)	218 ft. (109 sockets)	160 ft. (80 sockets)

Lighting for Weddings/Parties/Tent Events (E27, Incandescent)

11S14 Bulbs, 11 Watts, Medium Base (E27)

11S14 Sign Bulb, 11W, 130V, E27 medium base



Part #	Color	Packaging+	Part #	Color	Packaging+
11S14CL	Clear	20/120	11S14TA	Transp. Amber	20/120
11S14FW	Frosted White	20/120	11S14TB	Transp. Blue	20/120
11S14BL	Ceramic Blue	20/120	11S14TG	Transp. Green	20/120
11S14GR	Ceramic Green	20/120	11S14TPI	Transp. Pink	20/120
11S14OR	Ceramic Orange	20/120	11S14TPU	Transp. Purple	20/120
11S14RE	Ceramic Red	20/120	11S14TR	Transp. Red	20/120
11S14WH	Ceramic White	20/120	11S14TY	Transp. Yellow	20/120
11S14YE	Ceramic Yellow	20/120			

- 7 heavy-duty filament supports
- Medium screw base (E27)
- Double-dipped transparent and ceramic colors
- 5,000-hr rated life
- Length: 3-1/2" Diameter: 1-3/4"



+Pieces per inner case/Pieces per master case



A15 Party Bulbs, 15 Watts, Medium Base (E27)

A15 Party Light Bulb, 15 Watts, 130V, E27 medium base



Part #	Color	Packaging+	Part #	Color	Packaging+
15A15CL	Clear	25/250	15A15TG	Transparent Green	25/250
15A15FW	Frosted White	25/250	15A15TR	Transparent Red	25/250
15A15TA	Transparent Amber	25/250	15A15TY	Transparent Yellow	25/250
15A15TB	Transparent Blue	25/250			



+Pieces per inner case/Pieces per outer case

- Length: 3-1/2" Diameter: 1-3/4"
- Medium screw base (E27)
- 5,000-hr rated life

G50 Globe Bulbs, 15 Watts, Medium Base (E27)

G50 Globe Bulb, 15 Watts, 130V, E27 medium base



Part #	Color	Packaging+
G5015E27CL	Clear	25/500



- Length: 2-3/4" Diameter: 2"
- Medium screw base (E27)
- 2,500-hr rated life

A19 Party Bulbs, 25 Watts, Medium Base (E27)



A19 Party Light Bulb, 25 Watts, 130V, E27 medium base



Part #	Color	Packaging+	Part #	Color	Packaging+
25A19CL	Clear	25/250	25A19TB	Transparent Blue	25/250
25A15FW	Frosted White	25/250	25A19TG	Transparent Green	25/250
25A19TA	Transparent Amber	25/250	25A19TR	Transparent Red	25/250

+Pieces per inner case/Pieces per outer case

- Length: 4" Diameter: 2-1/4"
- Medium screw base (E27)
- 2,000-hr rated life

List of our LED Bulbs for Weddings/Parties/Tent Events

Cat Pg	Part#	Shape	Base	Grade	Material	Watts*	Color	K Temp	Dimmable	Certification
PARTY:										
5	LDG30SPW	G30	I	Com	Sm Pla	0.49/0.96	CW	7000	Both avail	UL, CSA
5	LDG30SSWW	G30	I	Com	Sm Pla	0.49/0.96	SWW	2500	Both avail	UL, CSA
5	LDG40PW	G40	I	Com	Fac Pla	0.49/0.96	CW	7000	Both avail	UL, CSA
5	LDG40SWW	G40	I	Com	Fac Pla	0.49/0.96	SWW	2500	Both avail	UL, CSA
23	LDG50PW	G50	M	Com	Fac Pla	0.55/1.5	CW	3300	Both avail	-
23	LDG50SWW	G50	M	Com	Fac Pla	0.55/1.5	SWW	2500	Both avail	-
23	LDS14PW	S14	M	Com	Fac Pla	0.55/1.5	CW	7000	Both avail	-
23	LDS14SWW	S14	M	Com	Fac Pla	0.55/1.5	SWW	2500	Both avail	-
34	LDSMG4012SWW	G40	C	Com	Sm Pla	0.37/0.96	SWW	2500	Both avail	UL, CSA
30	LDSMG40PW	G40	I	Com	Sm Pla	0.49/0.96	CW	7000	Both avail	UL, CSA
30	LDSMG40SWW	G40	I	Com	Sm Pla	0.49/0.96	SWW	2500	Both avail	UL, CSA
34	LDSMG5012SWW	G50	C	Com	Sm Pla	0.37/0.96	SWW	2500	Both avail	UL, CSA
30	LDSMG5017SWW	G50	I	Com	Sm Pla	0.49/0.96	SWW	2500	Both avail	UL, CSA
23	LDSMS14PW	S14	M	Com	Sm Pla	0.65/1.5	CW	7000	Both avail	-
23	LDSMS14SWW	S14	M	Com	Sm Pla	0.65/1.5	SWW	3300	Both avail	-
CONSTELLATION:										
26	LEDCA19WW	A19	M	Com	Glass	1.1	WW	2200	N	-
37	LEDCC32E12WW	C32	C	Com	Glass	0.7	WW	2200	N	-
31	LEDCC32E17WW	C32	I	Com	Glass	0.7	WW	2200	N	-
26	LEDCG50WW15	G50	M	Com	Glass	0.9	WW	2200	N	-
26	LEDCG80WW	G80	M	Com	Glass	1.1	WW	2200	N	-
26	LEDCG95WW	G95	M	Com	Glass	1.1	WW	2200	N	-
37	LEDCS8E12WW	S8	C	Com	Glass	0.5	WW	2200	N	-
31	LEDCS8E17WW	S8	I	Com	Glass	0.5	WW	2200	N	-
26	LEDCST64WW	ST64	M	Com	Glass	1.1	WW	2200	N	-
37	LEDCT20E12WW	T20	C	Com	Glass	0.9	WW	2200	N	-
31	LEDCT20E17WW	T20	I	Com	Glass	0.9	WW	2200	N	-
LED FILAMENT:										
25	LEDFA15227CL	A15	M	Com	Glass	2.0	WW	2200	Y	-
25	LEDFA19227CL	A19	M	Com	Glass	2.0	WW	2200	Y	-
37	LEDFB10212CL	B10	C	Com	Glass	2.0	WW	2200	Y	ETL
25	LEDFG80227CL	G80	M	Com	Glass	2.0	WW	2200	Y	ETL
25	LEDFS14227CL	S14	M	Com	Glass	2.0	WW	2200	Y	-
25	LEDFST18227CL	ST18	M	Com	Glass	2.0	WW	2200	Y	ETL
25	LEDFT14227CL	T14	M	Com	Glass	2.0	WW	2200	Y	ETL
37	LEDFT6212CL	T6	C	Com	Glass	2.0	WW	2200	Y	ETL
31	LEDFT6217CL	T6	I	Com	Glass	2.0	WW	2200	Y	ETL
25	LEDFT9227CL	T9	M	Com	Glass	2.0	WW	2200	Y	ETL
CLASSIC:										
22	LEDG93G50WH	G50	M	Std	Glass	0.8	CW	6500	N	-
22	LEDG93G50WW	G50	M	Std	Glass	0.8	WW	2500	N	-
22	LEDG93S14WH	S14	M	Std	Glass	0.8	CW	6500	N	-
22	LEDG93S14WW	S14	M	Std	Glass	0.8	WW	2500	N	-
34	LEDGG4012WW	G40	C	Std	Glass	0.6	WW	2500	N	-
30	LEDGG4017WW	G40	I	Std	Glass	0.6	WW	2500	N	-
34	LEDGG5012WW	G50	C	Std	Glass	0.6	WW	2500	N	-
30	LEDGG5017WW	G50	I	Std	Glass	0.6	WW	2500	N	-
22	LEDGG50WH	G50	M	Com	Glass	0.7	CW	6500	N	-
22	LEDGG50WW	G50	M	Com	Glass	0.7	WW	2900	N	-
22	LEDGS14WH	S14	M	Com	Glass	0.7	CW	6500	N	-
22	LEDGS14WW	S14	M	Com	Glass	0.7	WW	2900	N	-
PROFESSIONAL:										
36	LEDPRG3012WW	G30	C	Pro	Glass	0.5	WW	2700	Y	UL
32	LEDPRG4017WW	G40	I	Pro	Glass	1.0	WW	2700	Y	UL
27	LEDPRG50WW	G50	M	Pro	Glass	1.4	WW	2700	Y	UL
27	LEDPRS14WW	S14	M	Pro	Glass	1.4	WW	2700	Y	UL

Base:

C: Candelabra (E12)
I: Intermediate (E17)
M: Medium (E26/E27)

Grade:

Com: Commercial Grade
Pro: Professional Grade
Std: Standard Grade

Shell Material:

Fac Pla: Faceted Plastic
Sm Pla: Smooth Plastic

***Watts:**

Non-Dimmable/Dimmable

Color:

CW: Cool White
SWW: Sun Warm White
WW: Warm White

Lighting for Weddings/Parties/Tent Events (E27, LED)

LED S14 and LED G50 Classic Bulbs, 16 LEDs, 0.7 Watts, Medium Base (E27), Glass (Commercial Grade)

LED S14 Bulb, 0.7 W, 16 LEDs, 120V, E27 medium base, glass shell



Part #	Color	Packaging+
LEDGS14AM	Amber	25/150
LEDGS14BL	Blue	25/150
LEDGS14GR	Green	25/150
LEDGS14MU	Multi (Red, Green, Blue, Amber, Yellow)	25/150
LEDGS14RE	Red	25/150
LEDGS14YE	Yellow	25/150
LEDGS14WW	Warm White	25/150
LEDGS14WH	Cool White	25/150

+Pieces per inner case/Pieces per master case



LED S14 Classic, E27 medium base, 16 LEDs

LED G50 Bulb, 0.7 W, 16 LEDs, 120V, E27 medium base, glass shell, 2" dia



Part #	Color	Packaging+
LEDGG50AM	Amber	25/150
LEDGG50BL	Blue	25/150
LEDGG50GR	Green	25/150
LEDGG50MU	Multi (Red, Green, Blue, Amber, Yellow)	25/150
LEDGG50RE	Red	25/150
LEDGG50YE	Yellow	25/150
LEDGG50WW	Warm White	25/150
LEDGG50WH	Cool White	25/150

+Pieces per inner case/Pieces per master case



LED G50 Classic, E27 medium base, 16 LEDs

- Clear glass shell
- Non-dimmable—attempting to dim may damage products and will void warranty
- 1 year limited factory warranty
- Good replacement for 15W incandescent bulbs
- Warm white: 2800K-2900K
Cool white: 6500K
- 0.7W actual power consumption, but use 2W for installation calculation purposes
- Average life hours: 25,000
- Not UL listed

Ideal for long-term applications requiring everyday ambient, decorative lighting with minimal power consumption.

- S14: Length: 3-1/2" Dia: 1-3/4"
- G50: Length: 2-3/4" Dia: 2"

LED S14 and LED G50 Classic Bulbs, 9 LEDs, 0.8 Watts, Medium Base (E27), Glass (Standard Grade)



LED S14 Bulb, 0.8 W, 9 LEDs, 130V, E27 medium base, glass shell




Part #	Color	Packaging+
LEDG93S14WH	Cool White	25/250
LEDG93S14WW	Warm White	25/250

+Pieces per inner case/Pieces per master case

- S14: Length: 3-1/2" Dia: 1-3/4"



LED G50 Bulb, 0.8 W, 9 LEDs, 130V, E27 medium base, glass shell, 2" dia



Part #	Color	Packaging+
LEDG93G50WH	Cool White	25/250
LEDG93G50WW	Warm White	25/250

+Pieces per inner case/Pieces per master case

- G50: Length: 2-3/4" Dia: 2"



- Clear glass shell
- Non-dimmable—attempting to dim may damage products and will void warranty
- 1 year limited factory warranty
- Good replacement for 11W incandescent
- Warm white: 2500K
Cool white: 6500K
- 0.8W actual power consumption, but use 2.5W for installation calculation purposes
- Average life hours: 15,000
- Not UL listed

Lighting for Weddings/Parties/Tent Events (E27, LED)

LED S14 Bulbs, 0.65W, Medium Base (E27), 16 LEDs, Smooth Plastic Shell NEW!

LED S14 Sign Bulb, 16 LEDs, 130V,
E27 medium base, shatter-resistant plastic shell



Ideal for temporary applications such as weddings/special events requiring frequent installations and take downs.

Part #	Color	Packaging+
LDSMS14PW	Cool White	25/250
LDSMS14SWW	Sun Warm White	25/250

- Non-dimmable and dimmable available (use only LED-compatible dimmers)
- Shatter-resistant, smooth plastic shell
- Manufactured by Minleon International
- 1 year limited factory warranty
- Not UL listed
- Length: 3-1/2" Diameter: 1-3/4"
- Good replacement for 15W incandescent bulbs
- 0.65W (non-dimmable)/1.5W (dimmable) actual power consumption, but use 2W for installation calculation purposes
- Average life hours: 30,000



Thick, shatter-resistant plastic



LED S14, smooth plastic, sun warm white

LED S14 Bulbs, 0.55W, Medium Base (E27), 10 LEDs, Faceted Plastic Shell

LED S14 Sign Bulb, 10 LEDs, 130V,
E27 medium base, shatter-resistant plastic shell



Part #	Color	Packaging+
LDS14AM	Amber (orange)	25/250
LDS14BL	Blue	25/250
LDS14GR	Green	25/250
LDS14MU	Multi (Red, Green, Blue, Amber, Yellow)	25/250
LDS14RE	Red	25/250
LDS14SWW	Sun Warm White	25/250
LDS14PW	Cool White	25/250
LDS14YE	Yellow	25/250



Sun Warm White Cool White Yellow Amber Blue Green Red

- Non-dimmable and dimmable available (use only LED-compatible dimmers)
- Shatter-resistant, faceted plastic shell
- Manufactured by Minleon International
- 1 year limited factory warranty
- Not UL listed
- Length: 3-1/2" Diameter: 1-3/4"
- Good replacement for 11W incandescent bulbs
- 0.55W (non-dimmable)/1.5W (dimmable) actual power consumption, but use 2W for installation calculation purposes
- Average life hours: 30,000

+Pieces per inner case/Pieces per master case

LED G50 Globe Bulbs, 0.55W, Medium Base (E27), 10 LEDs, Faceted Plastic Shell

LED G50 Globe Bulb, 10 LEDs, 130V,
E27 medium base, shatter-resistant plastic shell



Part #	Color	Packaging+
AM	Amber	25/250
LDG50BL	Blue	25/250
LDG50GR	Green	25/250
LDG50MU	Multi (Red, Green, Blue, Amber, Yellow)	25/250
LDG50RE	Red	25/250
LDG50YE	Yellow	25/250
LDG50SWW	Sun Warm White	25/250
LDG50PW	Cool White	25/250



LED G50, E27 medium base



Cool White Sun Warm White

- Non-dimmable and dimmable available (use only LED-compatible dimmers)
- Shatter-resistant, faceted plastic shell
- Manufactured by Minleon International
- 1 year limited factory warranty
- Not UL listed
- Length: 2-3/4" Diameter: 2"
- Good replacement for 11W incandescent
- 0.55W (non-dimmable)/1.5W (dimmable) actual power consumption, but use 2W for installation calculation purposes
- Average life hours: 30,000

Sun warm white light produced by LEDs most closely resembles a "clear" (slight amber) light given off by traditional incandescent bulbs (2500K-2600K). Cool white casts an almost pure white light (7000K).

Antique Vintage-Style Edison Light Bulbs (E27) **NEW!**



ST 18 (Antique Edison),
E27, 25 Watts



T14 Spiral
E27, 15 or 25 Watts



T14 Squirrel Cage,
E27, 15 or 25 Watts



T9 Hairpin,
E27, 25 Watts



- Recommended to be used outdoors with string lights, especially our 106 ft. commercial-grade outdoor patio light strings
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Our medium base vintage bulbs consume 15-25 Watts, providing a very warm, antique glow (approximately 2200 Kelvin)
- 3,000-hr rated life
- Clear, colorless glass
- Various filament patterns available (squirrel cage, spiral, hairpin)

Antique Vintage-Style Light Bulbs, 120V, 2200K, glass




Part #	Base	Watts	Pattern	Shape	Length	Widest Dia	Packaging+
ATQST181325	E27	25	Squirrel Cage	Antique Edison	5-1/8"	2-1/2"	12/24
ATQT141315	E27	15	Squirrel Cage	Radio Style	4-3/8"	1-3/4"	10/100
ATQT141325	E27	25	Squirrel Cage	Radio Style	4-3/8"	1-3/4"	10/100
ATQT143215	E27	15	Spiral	Radio Style	4-3/8"	1-3/4"	10/100
ATQT143225	E27	25	Spiral	Radio Style	4-3/8"	1-3/4"	10/100
ATQT9525	E27	25	Hairpin	Tubular	5-3/16"	1-1/8"	12/144

+Pieces per inner case/Pieces per master case

Lighting for Weddings/Parties/Tent Events (E27, LED)

LED Filament Light Bulbs (E27) **NEW!**

LED Filament Light Bulbs, 2 Watts, 120V, 2200K, glass, DIMMABLE



Part #	Base	Watts	Shape	Length	Widest Dia	Packaging+
LEDFA15227CL	E27	2	Classic Gen Svc	3-1/2"	1-3/4"	10/100
LEDFA19227CL	E27	2	Classic Gen Svc	4"	2-1/4"	10/100
LEDFG80227CL	E27	2	Globe	4-3/4"	3-1/8"	10/100
LEDFS14227CL	E27	2	Sign	3-1/2"	1-3/4"	10/100
LEDFST18227CL	E27	2	Antique Edison	5"	2-1/4"	10/100
LEDFT14227CL	E27	2	Tubular	4"	1-3/4"	10/100
LEDFT9227CL	E27	2	Tubular	5-1/2"	1"	10/100

+Pieces per inner case/Pieces per master case



- Recommended to be used outdoors with commercial-grade string lights
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Very warm, antique-style glow (approximately 2200 Kelvin)
- Average life hours: 25,000
- Clear, colorless glass
- Comparable to 25W incandescent
- ETL Listed
- Dimmable with LED-compatible dimmers only (using non-LED compatible dimmers will void warranty of this product)



G80, E27



ST18, E27



T14, E27



T9, E27




ST18, E27



T14, E27

LED Constellation Light Bulbs (E27) **NEW!**

LED Constellation Light Bulbs, 120V, 2200K, E27, glass, non-dimmable



Part #	Base	Watts	# of LEDs	Shape	Length	Widest Dia	Packaging+
LEDCA19WW	E27	1.1	29	Classic Gen Svc	4"	2-1/4"	25/100
LEDCG50WW15	E27	0.9	15	Globe	2-3/4"	2"	25/100
LEDCG80WW	E27	1.1	33	Globe	4-5/8"	3-1/8"	20
LEDCG95WW	E27	1.1	33	Globe	5"	3-3/4"	20
LEDCST64WW	E27	1.1	37	Antique Edison	5-3/4"	2-1/2"	20

+Pieces per inner case/Pieces per master case

- Recommended to be used outdoors with commercial-grade string lights
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Numerous LEDs in each bulb give a unique lighting effect
- Very warm, antique-style glow (approximately 2200 Kelvin)
- Average life hours: 15,000
- G50 (15 LEDs) comparable to 11W incandescent; all others (29-37 LEDs) comparable to 25W incandescent
- Clear, colorless glass
- Not UL listed
- **Non-dimmable**—attempting to dim these light bulbs may damage products and will void product warranty
- Approximately 1W actual power consumption, but use 2W for installation calculation purposes



A19, E27



ST64, E27



G50 (2"), E27



G80 (3-1/8"), E27




G95 (3-3/4"), E27

Lighting for Weddings/Parties/Tent Events (E26, LED)

LED Professional-Grade Light Bulbs (E26) **NEW!** (UL Listed, rated for wet location)

LED Pro Light Bulbs, 120V, 2700K, glass, 1 LED, UL Listed, DIMMABLE, E26



Part #	Base	Watts	Color Temp	Widest Dia	Packaging+
LEDPRG50WW	E26	1.4	2700K	2"	25/200
LEDPRS14WW	E26	1.4	2700K	1-3/4"	25/200

+Pieces per inner case/Pieces per master case

- Recommended to be used outdoors with our commercial-grade string lights
- Average life hours: 25,000
- Clear, colorless glass
- G50 and S14 comparable to 11W incandescent
- UL listed for wet location, indoor and outdoor
- Ideal for commercial/municipal installations requiring UL Listed LED light bulbs
- **Dimmable with LED-compatible dimmers only (using non-LED compatible dimmers will void warranty of this product)**



G50, E26



S14, E26



Commercial-Grade Heavy-Duty Light Strings, Intermediate Base (E17)

- Designed for year-round, outdoor use or temporary use requiring constant installations and take downs
- Heavy-duty 16AWG SPT-2 wire is robust enough for commercial use, but light enough for easy installation
- PVC encapsulated sockets with brass contacts are resistant to UV sunlight exposure
- Sockets are designed to ensure a snug, weather-resistant seal around lamp bases
- Maximum wattage per intermediate base socket: 10 Watts
- Maximum run per circuit: **960 Watts (8 Amps) for 56 ft. and 100 ft. strings and 1,200 Watts (10 Amps) for 330 ft. spool**
- The 56 ft. string includes an 8 inch lead and an 8 inch tail for end-to-end connections (up to 960 Watts). The 100 ft. string includes a 6 ft. lead from the male plug to the first socket and is not end-to-end connectable
- **Not UL listed (only wire and plugs are UL components)**
- **Light bulbs sold separately**



G40 (1-1/2" dia) clear bulbs (incandescent)



LED G40 (1-1/2" dia) warm white bulb (glass)

NEW!



LED G50 (2" dia)
warm white bulb (glass)

NEW!



LED G40 (1-1/2" dia)
sun warm white bulb (smooth plastic)

Lighting for Weddings/Parties/Tent Events (E17)

Commercial-Grade Heavy-Duty Light String, intermediate base in-line sockets, 15" spacing


INT

Part #	Color of Wire	Length	# of Sockets	Socket Type	Lead	End-to-End Connectable	Max. Wattage	Packaging
LSI1556BKF	Black	56 ft.	45	Weather-resistant	8" lead with plug	Yes	960W	8/case
LSI1556WHF	White	56 ft.	45	Weather-resistant	8" lead with plug	Yes	960W	8/case
LSI15100BKF	Black	100 ft.	75	Weather-resistant	6' lead with plug	No	960W	4/case
LSI15100WHF	White	100 ft.	75	Weather-resistant	6' lead with plug	No	960W	4/case
LSI15330BK	Black	330 ft.	264	Weather-resistant	No	N/A	1,200W	1/case
LSI15330WH	White	330 ft.	264	Weather-resistant	No	N/A	1,200W	1/case

Maximum 1,200 Watts per run for the 330 ft. spools:

Lamp Wattage :	Any of our LED bulbs (<2W)	G40 (5W)	G40 or G50 (7W)	G50 (10W)
Max. Run (# of Sockets):	330 ft. (264 sockets)	300 ft. (240 sockets)	213 ft. (170 sockets)	150 ft. (120 sockets)

NEW!

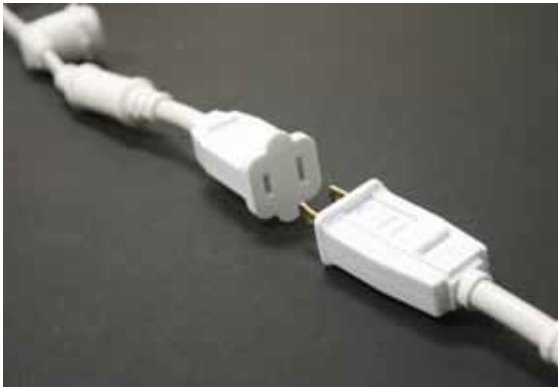

56-foot intermediate base light strings are end-to-end connectable up to 960W (black or white)




Weather-resistant Sockets

Comparison of medium base and intermediate base commercial-grade strings:

Socket (Base) Type	Inside Diameter of Socket	Approx. Length of Socket	Spacing Between Sockets	Length of String	Compatible Light Bulbs	Color	Suspended Socket Available
Intermediate Base (pgs. 28-29)	5/8"	1-1/4"	15"	56 ft., 100 ft. or 330 ft.	G40, G50, LED G30, LED G40	Black or white	No
Medium Base (pgs. 18-19)	1"	2"	24"	48ft., 54 ft., 106 ft. or 330 ft.	11S14, A15, G50, LED G50, LED S14	Black, green or white	Yes

LED G40 and G50 Globe Party Bulbs – Intermediate Base (E17), Smooth Plastic, 5 LEDs

LED Globe Bulbs, intermediate (E17) base, 130V, smooth, plastic finish, 5 LEDs



Part #	Bulb Dia	Color	Packaging+
LDSMG40SWW	1-1/2"	Sun Warm White	25/500
LDSMG5017SWW	2"	Sun Warm White	25/250

+Packaging: Pieces per inner case/pieces per master case

- Shatter-resistant plastic shell
- Non-dimmable and dimmable available (use only LED-compatible dimmers)
- UL listed and CSA approved for indoor and outdoor use
- Manufactured by Minleon International
- 1 year limited factory warranty
- Fits directly into any intermediate base (E17) socket
- 0.49W (non-dimmable)/0.96W (dimmable) actual power consumption, but use 2W for installation calculation purposes
- Average life hours: 30,000

NEW!



LED G40 (1-1/2" dia)
sun warm white
(smooth plastic)

Ideal for temporary applications such as weddings/special events requiring frequent installations and take downs. Also good for locations with limited access to power.

LED G40 and G50 Globe Party Bulbs – Intermediate Base (E17), Glass, 5 or 6 LEDs

LED G40 and G50 Globe Bulbs, intermediate (E17) base, 130V, glass, 5 or 6 warm white LEDs



Part #	Watts	Bulb Dia	LEDs	Packaging+
LEDGG4017WW	0.6	1-1/2"	5	25/250
LEDGG5017WW	0.6	2"	6	25/250

+Packaging: Pieces per inner case/pieces per master case

- Clear glass shell
- 1 year limited factory warranty
- Good replacement for 7W incandescent bulbs
- Warm white: 2500K
- Fits directly into any intermediate base (E17) socket
- 0.6W actual power consumption, but use 2.5W for installation calculation purposes
- Average life hours: 15,000
- Not UL listed
- **Non-dimmable**—attempting to dim these light bulbs may damage products and will void product warranty



LED G40 Globe Bulb (1-1/2") with 5 LEDs (warm white), E17



LED G40 (1-1/2" dia) warm white bulb (glass)

Lighting for Weddings/Parties/Tent Events (E17, LED)

LED Filament Light Bulbs (E17) NEW!

LED Filament Light Bulbs, 2 Watts, 120V, 2200K, glass, ETL Listed, DIMMABLE, E17 INT LED GLS

Part #	Base	Watts	Shape	Length	Widest Dia	Packaging+
LEDFT6217CL	E17	2	Tubular	3-5/8"	3/4"	10/100

+Pieces per inner case/Pieces per master case

- Recommended to be used outdoors with commercial-grade string lights
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Very warm, antique-style glow (approximately 2200 Kelvin)
- Average life hours: 25,000
- Clear, colorless glass
- Comparable to 25W incandescent
- ETL Listed
- **Dimmable with LED-compatible dimmers only (using non-LED compatible dimmers will void warranty of this product)**



T6, E17

LED Constellation Light Bulbs (E17) NEW!

LED Constellation Light Bulbs, 2200K, glass, non-dimmable, E17

INT LED GLS

Part #	Base	Watts	# of LEDs	Shape	Length	Widest Dia	Packaging+
LEDCC32E17WW	E17	0.7	25	Candle	4"	1-1/4"	25/200
LEDCS8E17WW	E17	0.5	9	Sign	2-1/4"	1"	25/200
LEDCT20E17WW	E17	0.9	31	Tubular	4-1/2"	3/4"	25/100

+Pieces per inner case/Pieces per master case

- Recommended to be used outdoors with commercial-grade string lights
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Numerous LEDs in each bulb give a unique lighting effect
- Very warm, antique-style glow (approximately 2200 Kelvin)
- Average life hours: 15,000
- C32 comparable to 10W incandescent; S8 comparable to 5W incandescent; T20 comparable to 11W incandescent
- Clear, colorless glass
- Not UL listed
- **Non-dimmable—attempting to dim these light bulbs may damage products and will void product warranty**
- **0.5W-0.9W actual power consumption, but use 2W for installation calculation purposes**



C32, E17



S8, E17



T20, E17

Antique Vintage-Style Edison Light Bulbs (E17)

NEW!

Antique Vintage-Style Light Bulbs, 120V, 2200K, glass, E17



Part #	Base	Watts	Pattern	Shape	Length	Widest Dia	Packaging+
ATQB11E1710	E17	10	Z-shape	Candle	3-7/8"	1-3/8"	10/100
ATQT8E1715	E17	15	Squirrel Cage	Tubular	3-1/2"	1"	25/200

+Pieces per inner case/Pieces per master case

- Recommended to be used outdoors with our commercial-grade patio string lights or C9 lightstrings
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Our intermediate base vintage bulbs consume 10-15 Watts, providing a very warm, antique glow (approximately 2200 Kelvin)
- 3,000-hr rated life
- Clear, colorless glass




B11, E17



T8, E17

LED Professional-Grade Light Bulbs (E17) **NEW!** (UL rated for wet location)

LED G40 Pro Light Bulbs, 120V, 2700K, glass, 1 LED, UL Listed, DIMMABLE, E17



Part #	Base	Watts	Color Temp	Widest Dia	Packaging+
LEDPRG4017WW	E17	1.0	2700K	1-1/2"	25/200

- Recommended to be used outdoors with our commercial-grade string lights
- Average life hours: 25,000
- Clear, colorless glass
- G40 comparable to 7W incandescent (replacement for our 7W C9 or G40 intermediate base light bulbs)
- UL listed for wet location, indoor and outdoor
- Ideal for commercial/municipal installations requiring UL Listed LED light bulbs
- **Dimmable with LED-compatible dimmers only (using non-LED compatible dimmers will void warranty of this product)**



G40, E17



G40 and G50 Globe Party Bulbs – Intermediate Base (E17) (Incandescent)

G40 Globe Bulbs, intermediate (E17) base, 130V INT INC GLS

Part #	Watts	Bulb Dia	Color	Packaging+
G405E17CL	5	1-1/2"	Clear	25/500
G407E17CL	7	1-1/2"	Clear	25/500

+Packaging: Pieces per inner case/pieces per master case



G50 (2" dia) transparent colors (blue, amber, red and clear)

G50 Globe Bulbs, intermediate (E17) base, 130V

INT INC GLS

Part #	Watts	Bulb Dia	Color	Packaging+
G507E17CL	7	2"	Clear	25/500
G507E17TA	7	2"	Transparent Amber	25/500
G507E17TB	7	2"	Transparent Blue	25/500
G507E17TG	7	2"	Transparent Green	25/500
G507E17TPI	7	2"	Transparent Pink	25/500
G507E17TR	7	2"	Transparent Red	25/500
G507E17TY	7	2"	Transparent Yellow	25/500
G5010E17CL	10	2"	Clear	25/500

+Packaging: Pieces per inner case/pieces per master case



G50 (2" dia) clear light bulbs and C9 white light string

G50 Globe Bulbs with 5 Rice Lights, intermediate (E17) base, 5W, 130V

INT INC GLS

Part #	Watts	Bulb Dia	Color	Packaging+
G505E17CLRC	5	2"	Clear	25/250



G50 Globe Bulb (2") with 5 rice lights (intermediate base E17, 5W)

LED G40 and G50 Globe Party Bulbs – Candelabra Base (E12), Glass, 5 or 6 LEDs

LED G40 and G50 Globe Bulbs, candelabra (E12) base, 130V, glass, 5 or 6 warm white LEDs CAN LED GLS

Part #	Watts	Bulb Dia	LEDs	Packaging+
LEDGG4012WW	0.6	1-1/2"	5	25/250
LEDGG5012WW	0.6	2"	6	25/250

+Packaging: Pieces per inner case/pieces per master case



LED G40 Globe Bulb (1-1/2") with 5 LEDs (warm white), E12

- Clear glass shell
- 1 year limited factory warranty
- Fits directly into any candelabra base (C7) socket
- Good replacement for 5W or 7W incandescent bulbs
- Warm white: 2500K
- 0.6W actual power consumption, but use 2.5W for installation calculation purposes
- Average life hours: 15,000
- Not UL listed
- **Non-dimmable**—attempting to dim these light bulbs may damage products and will void product warranty

LED G40 and G50 Globe Party Bulbs – Candelabra Base (E12), Smooth Plastic, 3 LEDs

LED Globe Bulbs, candelabra (E12) base, 130V, smooth, plastic finish, 3 LEDs CAN LED PLA

Part #	Watts	Bulb Dia	Color	Packaging+
LDSMG4012SWW	0.37	1-1/2"	Sun Warm White	25/500
LDSMG5012SWW	0.37	2"	Sun Warm White	25/250

+Packaging: Pieces per inner case/pieces per master case



LED G40 (1-1/2" dia), sun warm white, smooth plastic

- Shatter-resistant smooth plastic shell
- Non-dimmable and dimmable available (use only LED-compatible dimmers)
- 1 year limited factory warranty
- Fits directly into any candelabra base (C7) socket
- Good replacement for 5W incandescent bulbs
- UL listed and CSA approved for indoor and outdoor use
- Sun warm white: 2500K-2600K
- 0.37W (non-dimmable)/0.96W (dimmable) actual power consumption, but use 2W for installation calculation purposes
- Average life hours: 30,000

G30, G40 and G50 Globe Replacement Bulbs - Candelabra Base (E12)

What's the difference between all these Globe bulbs?

- G30 bulb diameter: 1¼"
- G40 bulb diameter: 1½"
- G50 bulb diameter: 2"

- To be used with C7 strings/spools with candelabra base (E12) sockets (see pg. 12)

G30 Globe Replacement Bulbs, candelabra (E12) base, 130V



Part #	Watts	Bulb Dia	Color	Packaging+
G305E12CL	5	1-1/4"	Clear	25/500
G305E12MU	5	1-1/4"	Satin Multi (Re, Gr, Am, Bl, Pi)	25/500
G305E12WH	5	1-1/4"	Pearl White	25/500

+Packaging: Pieces per inner case/pieces per master case



G40 Globe Replacement Bulbs, candelabra (E12) base, 130V



Part #	Watts	Bulb Dia	Color	Packaging+
G405E12CL	5	1-1/2"	Clear	25/500
G405E12MU	5	1-1/2"	Satin Multi (Re, Gr, Am, Bl, Pi)	25/500
G405E12WH	5	1-1/2"	Pearl White	25/500
G405E12TA	5	1-1/2"	Transparent Amber	25/500
G405E12TB	5	1-1/2"	Transparent Blue	25/500
G405E12TG	5	1-1/2"	Transparent Green	25/500
G405E12TPI	5	1-1/2"	Transparent Pink	25/500
G405E12TR	5	1-1/2"	Transparent Red	25/500
G405E12TY	5	1-1/2"	Transparent Yellow	25/500

+Packaging: Pieces per inner case/pieces per master case



G50 Globe Replacement Bulbs, candelabra (E12) base, 130V



Part #	Watts	Bulb Dia	Color	Packaging+
G507E12CL	7	2"	Clear	25/500
G507E12MU	7	2"	Satin Multi (Re, Gr, Am, Bl, Pi)	25/500
G507E12WH	7	2"	Pearl White	25/500

+Packaging: Pieces per inner case/pieces per master case



Bulbs (L to R): Pearl White, Satin Multi (Amber, Green, Red, Blue, Pink), Clear



G40 (1-1/2" dia) candelabra base - Satin Multi



G50 (2" dia) candelabra base - Pearl White



C7 Light Strings with G40 Bulbs (clear)

Lighting for Weddings/Parties/Tent Events (E12)

Antique Vintage-Style Edison Light Bulbs (E12) **NEW!**

Antique Vintage-Style Light Bulbs, 120V, 2200K, glass, E12



Part #	Base	Watts	Pattern	Shape	Length	Widest Dia	Packaging+
ATQB11E1210	E12	10	Z-shape	Candle	3-7/8"	1-3/8"	10/100
ATQT8E1215	E12	15	Squirrel Cage	Tubular	3-1/2"	1"	25/200

+Pieces per inner case/Pieces per master case

- Recommended to be used outdoors with string lights
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Our candelabra base vintage bulbs consume 10-15 Watts, providing a very warm, antique glow (approximately 2200 Kelvin)
- 3,000-hr rated life
- Clear, colorless glass
- Various filament patterns available



B11, E12



T8, E12

LED Professional-Grade Light Bulbs (E12) **NEW!** (UL rated for wet location)

LED Pro Light Bulbs, 120V, 2700K, glass, 1 LED, UL Listed, DIMMABLE



Part #	Base	Wattage	Color Temp	Widest Dia	Packaging+
LEDPRG3012WW	E12	0.5	2700K	1-1/8"	25/500

+Pieces per inner case/Pieces per master case



G30, E12

- Recommended to be used outdoors with commercial-grade string lights
- Average life hours: 25,000
- Clear, colorless glass
- G30 comparable to 5W incandescent
- UL listed for wet location, indoor and outdoor
- Ideal for commercial/municipal installations requiring UL Listed LED light bulbs
- **Dimmable with LED-compatible dimmers only (using non-LED compatible dimmers will void warranty of this product)**

Lighting for Weddings/Parties/Tent Events (E12, LED)

LED Filament Light Bulbs (E12) **NEW!**

LED Filament Light Bulbs, 2 Watts, 120V, 2200K, glass, ETL Listed, DIMMABLE, E12 CAN LED GLS

Part #	Base	Watts	Shape	Length	Widest Dia	Packaging+
LEDFB10212CL	E12	2	Chandelier	3-3/4"	1-1/4"	10/100
LEDFT6212CL	E12	2	Tubular	3-5/8"	3/4"	10/100

+Pieces per inner case/Pieces per master case

- Recommended to be used outdoors with commercial-grade string lights
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Very warm, antique-style glow (approximately 2200 Kelvin)
- Average life hours: 25,000
- Clear, colorless glass
- Comparable to 25W incandescent
- ETL Listed
- **Dimmable with LED-compatible dimmers only (using non-LED compatible dimmers will void warranty of this product)**



B10, E12



T6, E12



LED Constellation Light Bulbs (E12) **NEW!**

LED Constellation Light Bulbs, 120V, 2200K, glass, NON-DIMMABLE, E12

CAN LED GLS

Part #	Base	Watts	# of LEDs	Shape	Length	Widest Dia	Packaging+
LEDCC32E12WW	E12	0.7	25	Candle	4"	1-1/4"	25/200
LEDCS8E12WW	E12	0.5	9	Sign	2-1/4"	1"	25/200
LEDCT20E12WW	E12	0.9	31	Tubular	4-1/2"	3/4"	25/100

+Pieces per inner case/Pieces per master case

- Recommended to be used outdoors with commercial-grade string lights
- Vintage-style light bulbs are a great way to add soft ambient lighting to your special events
- Numerous LEDs in each bulb give a unique lighting effect
- Very warm, antique-style glow (approximately 2200 Kelvin)
- Average life hours: 15,000
- Not UL listed
- C32 comparable to 10W incandescent; S8 comparable to 5W incandescent; T20 comparable to 11W incandescent
- Clear, colorless glass
- **Non-dimmable—attempting to dim these light bulbs may damage products and will void product warranty**
- 0.5W-0.9W actual power consumption, but use 2W for installation calculation purposes



C32, E12




S8, E12



T20, E12

G30, G40 and G50 Globe Light Sets (Pre-lamped, ready to use)

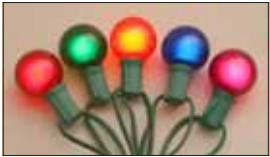

G40 Set - Satin Multi Bulbs



G40 Set - Clear Bulbs



G40 Set - Pearl White Bulbs



- UL listed for indoor and outdoor use
- End-to-end connectable up to 50 ft.
- Light sets have candelabra base (E12) sockets
- Light bulbs included; sets are pre-assembled and ready to use
- 20 AWG SPT-1 wire

G30 Globe Light String Set, 1-1/4" dia, 25 ft, 25 lights, 12" spacing, candelabra base (E12), UL listed



Part #	Wire	Bulb	Packaging
G30LSGCL	Green	Clear	12/case
G30LSGMU	Green	Satin Multi (Re, Gr, Bl, Am, Pi)	12/case
G30LSGWH	Green	Pearl White	12/case

What's the difference between all these Globe bulbs?

- G30 bulb diameter: 1¼"
- G40 bulb diameter: 1½"
- G50 bulb diameter: 2"

G40 Globe Light String Set, 1-1/2" dia, candelabra base (E12), pre-assembled, UL listed



Part #	Length/Spacing	# of Lights	Wire	Bulb	Packaging
G40LSGCL10	10 ft./12"	10	Green	Clear	12/case
G40LSGCL	25 ft./12"	25	Green	Clear	12/case
G40LSGMU	25 ft./12"	25	Green	Satin Multi (Re, Gr, Bl, Am, Pi)	12/case
G40LSGWH	25 ft./12"	25	Green	Pearl White	12/case
G40LSWCL	25 ft./12"	25	White	Clear	12/case
G40LSWWH	25 ft./12"	25	White	Pearl White	12/case

G50 Globe Light String Set, 2" dia, 15 ft, 15 lights, 12" spacing, candelabra base (E12), UL listed



Part #	Wire	Bulb	Packaging
G50LSGCL	Green	Clear	12/case
G50LSGMU	Green	Satin Multi (Re, Gr, Bl, Am, Pi)	12/case
G50LSGWH	Green	Pearl White	12/case



Our pre-lamped globe light sets come in packaging ideal for RETAILERS

Lighting for Weddings/Parties/Tent Events

Chili Lights



Chili Light String - Green



Chili Light String - Yellow



Chili Light String - Red

Chili Light String, 35 chilis, green cord, 3' lighted length, 23" lead, 4" spacing, UL listed for indoor and outdoor, connect end-to-end up to 14 sets

INC

Part #	Chili	Packaging
CHI35GR	Green	24/case
CHI35RE	Red	24/case
CHI35YE	Yellow	24/case



Cluster Yellow

Chili Light Ristra Clusters, 50 chilis, brown cord, 27" lead, 16" cluster, UL listed for indoor and outdoor, stackable up to 5 sets

INC

Part #	Chili	Packaging
CHI50MU	Red, Green and Yellow	24/case
CHI50RE	Red	24/case

Amusement Lighting

7½S11 and 10S11 Sign Bulbs



7-1/2 S11 Sign Bulb, 7.5W, 130V, medium (E26) base

MED INC GLS

Part #	Color	Packaging+
75S11CL	Clear	25/250

+Pieces per inner case/Pieces per outer case

7½S11 Sign Bulb
Medium base (E26)



10S11 Sign Bulb, 10W, 130V, intermediate (E17) base

INT INC GLS

Part #	Color	Packaging+
10S11CL	Clear	25/250

+Pieces per inner case/Pieces per outer case

10S11 Sign Bulb
Intermediate Base (E17)

T3 and T5½ Tubular Bulbs

- 3,000-hr rated life



T3 Tubular Bulbs, E10 base, clear

INC GLS

Part #	Watts	Volts	Packaging+
T33W24	3	24	100/1000
T34W60	4	60	100/1000

+Pieces per inner case/Pieces per outer case

T-3 Miniature Tubular



T5-1/2 Tubular Bulbs, E14 base, clear

INC GLS

Part #	Watts	Volts	Packaging+
T55524	5	24	50/1000
T55860	8	60	50/1000
T558130	8	130	50/1000
T551060	10	60	50/1000
T5510130	10	130	50/1000
T5510230	10	230	50/1000

+Pieces per inner case/Pieces per outer case

T-5½ Tubular



DOWNTOWN GRAPHICS NETWORK INC

we speak main street
www.dgninc.com

**PO Box 4216
Salisbury NC 28145-4216**

**1409 S Fulton St.
Salisbury, NC 28144 6416**

