



# Right-Angled LED Retrofit Paddle Lamps

Variable 30 to 60 Watts or 75 to 115 Watts – 100~277VAC – 5000K White – E39 Base – ETL



## FEATURES

- 5 Year LEDtronics Warranty
- Energy Savings up to 85% over HID Lamps
- Lumen Maintenance over 70% @ 30,000+ Hours
- Tunable Wattage / ETL Listed (5029536)
- Easy Installation; Usable in Enclosed Luminaires
- Die-cast Aluminum Housing with High Thermal Conductivity; Polycarbonate Lens; Internal Fan
- Adjustable E39 Mogul Base Rotates 360 Degrees, with Rotary Base Lock
- Internal Certified Driver, Wide Input Voltage Range
- High Lumen & CRI, Wide Beam, Even Lighting
- No UV/IR, No Mercury or Lead, Flicker-free
- Solid State – High Shock/Vibration Resistant

## APPLICATIONS

Fits Varied Fixtures to Replace Traditional MH & HPS Lamps:

- Street Cobraheads
- Shoebox Luminaires
- Canopies & Wall Packs
- Outdoor & Covered Parking Areas
- Driveway & Walkway Lighting
- Security Flood Lighting

## AVAILABLE OPTIONS

- Other CCT Colors: 3000K & 4000K
- Other Wattages



More than 40 Years of LEDtronics Design, Engineering & Manufacturing Experience




**Color Temp. (CCT)** 5000K Pure White  
**CRI** >80  
**Dimmability** Not Dimmable  
**Housing Material** Die-Cast Aluminum / Black  
**Lens** Polycarbonate / Type III  
**Base** E39 Mogul Screw  
**Operating Temp.** -13°F ~131°F / -25°C ~ +55°C



## LEDRA36T-3060WE39-XPW-103A

	30 Watts	45 Watts	60 Watts
<b>Nominal Power</b>	30 Watts	45 Watts	60 Watts
<b>Input Power</b>	29.3 W	44.8 W	60.6 W
<b>Input Voltage</b>	100~277VAC (Tested @ 120VAC)		
<b>Input Current</b>	0.245A	0.375A	0.508A
<b>Total Lumens</b>	5924 lm	8540 lm	11064 lm
<b>Efficacy</b>	202 lm/W	191 lm/W	183 lm/W
<b>Max. Candela</b>	2215 cd	3241 cd	4226 cd
<b>Power Factor</b>	0.99	1.0	1.0
<b>Beam Angle</b>	80° x 155°	80° x 155°	40° x 155°
<b>Dimensions</b>	L9.33 x W4.45 x H2.56 inch L237 x W113 x H65 mm		
<b>Weight</b>	1.59 lbs / 0.72 Kg		
<b>ETL Listing</b>	5029536 (LDT02-60W-E39-S)		

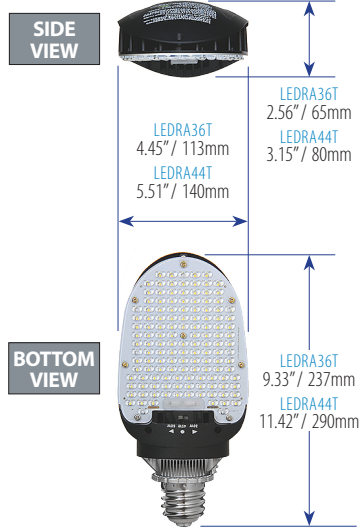

## LEDRA44T-75115WE39-XPW-103A

	75 Watts	95 Watts	115 Watts
<b>Nominal Power</b>	75 Watts	95 Watts	115 Watts
<b>Input Power</b>	74.1 W	94.1 W	111.8 W
<b>Input Voltage</b>	100~277VAC (Tested @ 120VAC)		
<b>Input Current</b>	0.627A	0.792A	0.940A
<b>Total Lumens</b>	14388 lm	17728 lm	20460 lm
<b>Efficacy</b>	194 lm/W	188 lm/W	183 lm/W
<b>Max. Candela</b>	4052 cd	4948 cd	5693 cd
<b>Power Factor</b>	0.99	0.99	0.99
<b>Beam Angle</b>	125° x 145°		
<b>Dimensions</b>	L11.42 x W5.51 x H3.15 inch L290 x W140 x H80 mm		
<b>Weight</b>	2.58 lbs / 1.17 Kg		
<b>ETL Listing</b>	5029536 (LDT01-115W-E39-S)		



Variable Wattage

E39 Base Rotates 360 Degrees



Safety Harness Included

# LEDTRONICS

America's Premium Brand LED Company™



23105 Kashiwa Court, Torrance, CA 90505  
 Phone: (800) 579.4875 / (310) 534.1505  
 Fax: (310) 534.1424  
 E-mail: info@ledtronics.com  
 Website: ledtronics.com

To order LEDtronics products, contact the Distributor or Sales Representative in your area.

Visit our website to find your local Distributor or Representative from our worldwide network:

**LEDtronics.com**

WWW.LEDTRONICS.COM

LOG 899 / Rev 01-2025

Check LEDTRONICS.COM for latest data. Printed material may be outdated.