




23105 Kashiwa Court, Torrance, CA 90505  
Phone: (800) 579-4875 or (310) 534-1505 Fax: (310) 534-1424  
E-mail: info@ledtronics.com  
Website: <http://www.ledtronics.com>

# LEDRA44T-75115WE39-XPW-103A

LED Retrofit Right-Angled Paddle Lamp; E39 Base  
Tunable Wattage: 75W/95W/115W – 100~277Vac  
Pure White (5000K)

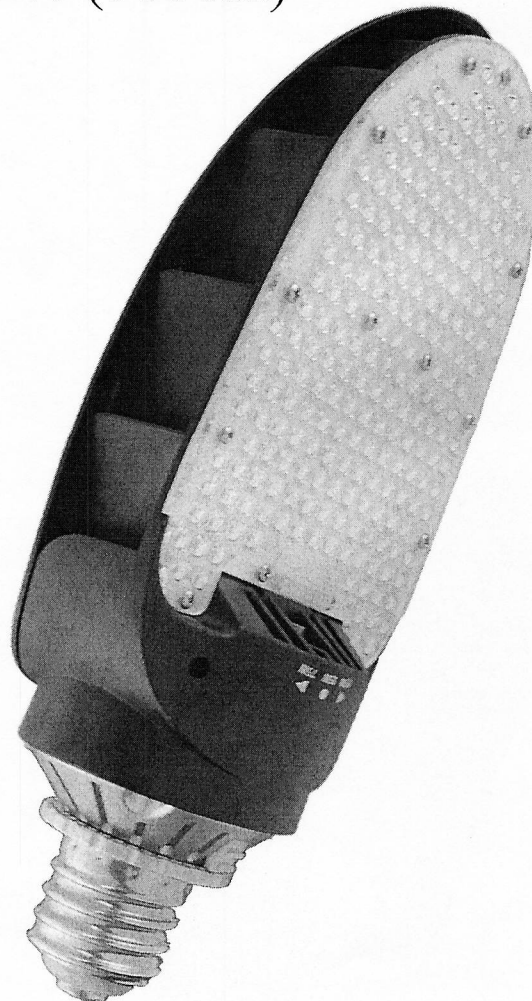

DWG BY:  
STL / HF / NM  
12-19-24

R&D:  
UF  
01-13-25

MFG:  
PP  
01-14-25

QA:  
RR  
01-14-25

REVISION LTR: PRELIMINARY (2)  
ECR#: 011325-UF01  
01-13-25

○ **Features**


Operating Temperature	-25°C to +55°C
Housing Material / Color	Die-Cast Aluminum / Black
Lens Material / Type	Polycarbonate / Type III
LED Type	SMD3030
LED Quantity	210 pcs.
Base	E39
ETL / cETL Listed	5029536 (LDT01-115W-E39-S)
Dimmable	No
Lifespan	>30,000 hrs.
Warranty	5 Years
Weight	2.58 lbs. / 1.17 kg.



○ **Electro-Optical Characteristics**

Part Number	LEDRA44T-75115E39-XPW-103A		
Input Voltage (typ)	100~277Vac		
Tested @ (Voltage)	120Vac		
CRI (Ra)	>80		
Nominal Power	<b>75 W</b>	<b>95 W</b>	<b>115 W</b>
<b>Pure White</b>	<b>CCT: 5000K</b>		
Power Consumption	74.1 W	94.1 W	111.8 W
Current Consumption	0.627 A	0.792 A	0.940 A
Efficacy: (Lm/W)	194	188	183
Lumens	14,388 lm	17,728 lm	20,460 lm
Maximum Candela	4,052 cd	4,948 cd	5,693 cd
Power Factor	0.99	0.99	0.99
Angle of illumination	125° x 145°	125° x 145°	125° x 145°

○ Dimensions

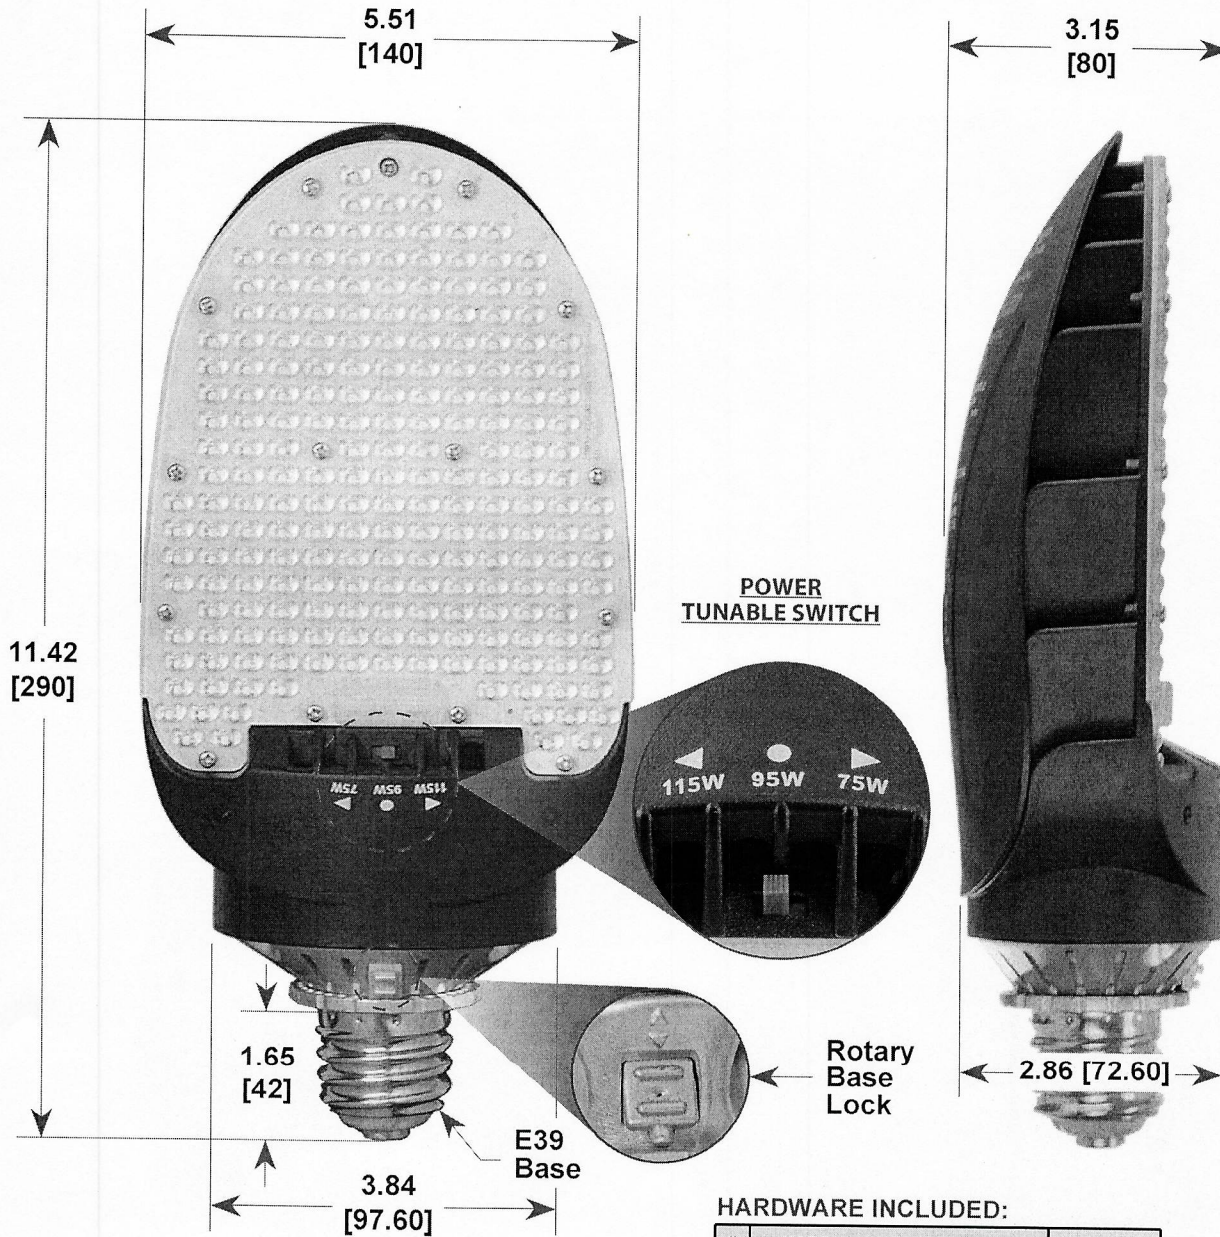

MINIMUM CAVITY REQUIREMENT: 420mm (L) x 420mm (W) x 360mm (H)

**Tolerance:**

XXX +/- .010  
XX +/- .025

**Note:**

1. All Dimensions are in Inches [Millimeters].

**HARDWARE INCLUDED:**

#	HARDWARE DESCRIPTION	QTY.
1	SAFETY HARNESS	1 pc.

