LED Lamps - Tubes



Type C LED Tubes and Drivers

Current's Type C LED Tubes and Drivers are the preferred LED Tube choice for applications that demand dimming, controllability and flexibility. Type C LED Tubes operate from the low voltage DC output of the drivers. With LumenChoice® Drivers and LumenChoice® + SpectraChoice™ Type C LED Tubes, fewer SKUs can be used to address the needs of an entire facility.

PERFORMANCE HIGHLIGHTS:

Type C LED Tubes	
Light Output:	750 - 5,500 Lumens
CRI:	80
Fixed CCT:	3000K, 3500K, 4000K, 5000K
Selectable CCT:	3500K/4000K/5000K
Selectable U-Bend, 8ft CCT:	3000K/3500K/4000K/5000K
Wattage:	6-18W, 15-36W, 36W
Life:	50,000 - 70,000 hours
Temperature Rating:	-20° to 45° C
Rating:	Damp
Fixtures:	Open or Enclosed
Dimming:	0-10V with dimming driver

LIMITED WARRANTY

7 years for 70,000 hours
5 years for 50,000 hours

FEATURES:

Robust and Flexible System:

- Dedicated external LED drivers deliver low voltage Class 2 output from drivers to Type C LED Tubes
- Field-tunable driver output settings
- 0-10V dimming, readily integrated with controls
- Same lamps may be used on different drivers
- T8 & T5 lamps in a variety of lengths and light outputs
- 2.3X longer life than LFL (70,000 vs. 30,000 hours)

BENEFITS:

- Low voltage DC to lampholders
- 0-10V dimming on drivers allows control of many fixtures with few control devices
- LumenChoice® drivers are field-tunable, allowing light levels to be optimized in each space & enabling more energy savings
- LumenChoice® tubes may be used on various drivers, reducing SKU count and simplifying BOMs
- LumenChoice® + SpectraChoice™ tubes provide flexibility with different color temperatures, perfect for every application

LEARN MORE:

To learn more about saving money and energy, go to www.LED.com.

Not all product variations listed on the page are DLC qualified. To ensure that a specific model is qualified, visit www.designlights.org/search.

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Type C Tubes


CUSTOMER NAME
PROJECT NAME
DATE NOTES

Remote Drivers for Type C LED Tubes

Input Watts (Max.)	Order Code	Description	Input Voltage	Carton Qty[2]	Length (in)	Width (in)	Height (in)	Freq. (Hz)	Power Factor	Output Voltage	Max. Output Current (A)	Min. Temp.[1]	Max Temp.	0-10V Dimmable	Default Wattage per Tube Setting	Additional Information
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
36	93313132	LED/6-18/DR/D2L	120-347 VAC	10	9.5	1.3	1.2	60	>0.9	26-34 VDC	0.53x2	-4° F	104° F	Yes	12W	Max. 2 Tubes: Class 2 Output
72	93313181	LED/6-18/DR/D4L	120-347 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	0.53x4	-4° F	104° F	Yes	12W	Max. 4 Tubes: Class 2 Output
72	93324881	LED/15-36/DR/D2L	120-347 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	1.06x2	-4° F	104° F	Yes	36W	Max. 2 Tubes: Class 2 Output
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
66	21379	LED/DR/D4L/LW	120-277 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	0.48x4	-4° F	104° F	Yes	12W	Max. 4 Tubes: Class 2 Output
Fixed Wattage Remote Drivers for Type C LED Tubes																
72	63126	LED36T8/DR/D2L	120-277 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	1.06x2	-4° F	104° F	Yes	36W	Max. 2 Tubes: Class 2 Output

Programming LumenChoice™ Drivers

Before installation, LumenChoice™ Drivers must be set to the desired output. Lumen levels corresponding to the driver settings below are noted in the specification tables. Adjust the switches on the side of the driver to achieve the desired performance according to the table below.



DRIVER DESCRIPTIONS	DRIVER PRODUCT CODES
LED/6-18/DR/D2L LED/6-18/DR/D4L	93313132 93313181

SYSTEM WATTS PER LAMP	SWITCH CODE				
	1	2	3	4	5
18	OFF	OFF	OFF	OFF	OFF
15	ON	OFF	OFF	OFF	OFF
12	OFF	ON	OFF	OFF	OFF
9	OFF	OFF	ON	OFF	OFF
6	OFF	OFF	OFF	ON	OFF

DRIVER DESCRIPTIONS	DRIVER PRODUCT CODES
LED/15-36/DR/D2L	93324881

SYSTEM WATTS PER LAMP	SWITCH CODE				
	1	2	3	4	5
36	OFF	OFF	OFF	OFF	OFF
30	ON	OFF	OFF	OFF	OFF
25	OFF	ON	OFF	OFF	OFF
21	OFF	OFF	ON	OFF	OFF
15	OFF	OFF	OFF	ON	OFF

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Type C Tubes

CUSTOMER NAME
PROJECT NAME
DATE NOTES

Remote Drivers for Type C LED Tubes

Input Watts (Max.)	Order Code	Description	Input Voltage	Carton Qty[2]	Length (in)	Width (in)	Height (in)	Freq. (Hz)	Power Factor	Output Voltage	Max. Output Current (A)	Min. Temp.[1]	Max Temp.	0-10V Dimmable	Default Wattage per Tube Setting	Additional Information
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
36	93313132	LED/6-18/DR/D2L	120-347 VAC	10	9.5	1.3	1.2	60	>0.9	26-34 VDC	0.53x2	-4° F	104° F	Yes	12W	Max. 2 Tubes: Class 2 Output
72	93313181	LED/6-18/DR/D4L	120-347 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	0.53x4	-4° F	104° F	Yes	12W	Max. 4 Tubes: Class 2 Output
72	93324881	LED/15-36/DR/D2L	120-347 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	1.06x2	-4° F	104° F	Yes	36W	Max. 2 Tubes: Class 2 Output
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
66	21379	LED/DR/D4L/LW	120-277 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	0.48x4	-4° F	104° F	Yes	12W	Max. 4 Tubes: Class 2 Output

LumenChoice® + SpectraChoice™ T8 Type C LED Tube and Driver System - 6-18W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Selectable Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 6W	9W	12W	15W	18W
LumenChoice® + SpectraChoice™ 4 ft T8 Glass Tube - Selectable CCT															
T8	G13	93322420	LEDT8/LC/G/4/8SC	20	48	3500K 4000K* 5000K	80	70,000	-	Damp	1000 1050 1050	1450 1500 1500	1850 1950 1950	2200 2300 2300	2550 2650 2650
LumenChoice® + SpectraChoice™ 3 ft T8 Glass Tube - Selectable CCT															
T8	G13	93322422	LEDT8/LC/G/3/8SC	20	36	3500K 4000K* 5000K	80	70,000	-	Damp	950 1000 1000	1350 1450 1450	1750 1850 1850	2100 2200 2200	2450 2550 2550
LumenChoice® + SpectraChoice™ 2 ft T8 Glass Tube - Selectable CCT															
T8	G13	93322418	LEDT8/LC/G/2/8SC	20	24	3500K 4000K* 5000K	80	70,000	-	Damp	900 950 950	1300 1400 1400	1700 1800 1800		

LumenChoice® T8 Type C LED Tube and Driver System - 6-18W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 6W	9W	12W	15W	18W
LumenChoice® 4 ft T8 Glass Tubes - Fixed CCT															
T8	G13	34211	LEDT8/LC/G/4/830	20	48	3000K	80	70,000	Yes	Damp	800	1200	1600	1950	2350
	G13	93314798	LEDT8/LC/G/4/835XL	20	48	3500K	80	70,000	Yes	Damp	1000	1450	1850	2250	2600
	G13	93314800	LEDT8/LC/G/4/840XL	20	48	4000K	80	70,000	Yes	Damp	1050	1500	1900	2300	2650
	G13	93314802	LEDT8/LC/G/4/850XL	20	48	5000K	80	70,000	Yes	Damp	1050	1500	1900	2300	2650
LumenChoice® 3 ft T8 Glass Tubes - Fixed CCT															
T8	G13	36394	LEDT8/LC/G/3/830	20	36	3000K	80	70,000	-	Damp	800	1200	1600	1950	2350
LumenChoice® 2 ft T8 Glass Tubes - Fixed CCT															
T8	G13	36406	LEDT8/LC/G/2/830	20	24	3000K	80	70,000	-	Damp	750	1100	1450		

LumenChoice® + SpectraChoice™ T8 Type C LED Tube and Driver System - 15-36W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Selectable Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 15W	21W	25W	30W	36W
LumenChoice® + SpectraChoice™ 4 ft T8 Glass Tube - Selectable CCT															
T8	G13	93322420	LEDT8/LC/G/4/8SC	20	48	3500K 4000K* 5000K	80	70,000	-	Damp	2200 2300 2300	2900 3000 3000	3400 3500 3500		

LumenChoice® T8 Type C LED Tube and Driver System - 15-36W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 15W	21W	25W	30W	36W
LumenChoice® 4 ft T8 Glass Tubes - Fixed CCT															
T8	G13	34211	LEDT8/LC/G/4/830	20	48	3000K	80	70,000	-	Damp	1950	2650	3100		
	G13	93314798	LEDT8/LC/G/4/835XL	20	48	3500K	80	70,000	-	Damp	2250	2900	3300		
	G13	93314800	LEDT8/LC/G/4/840XL	20	48	4000K	80	70,000	-	Damp	2300	2950	3350		
	G13	93314802	LEDT8/LC/G/4/850XL	20	48	5000K	80	70,000	-	Damp	2300	2950	3350		

[1] The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
[2] Minimum order quantity = Carton Qty
[3] UL 1993 Environmental Requirements for LED LAMPS
Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations
[4] Not all product variations on this page are DLC qualified. Visit qpl.designlights.org/solid-state-lighting to confirm qualification.

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Type C Tubes

CUSTOMER NAME
PROJECT NAME
DATE NOTES

Remote Drivers for Type C LED Tubes

Input Watts (Max.)	Order Code	Description	Input Voltage	Carton Qty[2]	Length (in)	Width (in)	Height (in)	Freq. (Hz)	Power Factor	Output Voltage	Max. Output Current (A)	Min. Temp.[1]	Max Temp.	0-10V Dimmable	Wattage per Tube	Additional Information
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
72	93324881	LED/15-36/DR/D2L	120-347 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	1.06x2	-4° F	104° F	Yes	36W	Max. 2 Tubes: Class 2 Output
Fixed Wattage Remote Drivers for Type C LED Tubes																
72	63126	LED36T8/DR/D2L	120-277 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	1.06x2	-4° F	104° F	Yes	36W	Max. 2 Tubes: Class 2 Output

LumenChoice® + SpectraChoice™ T8 Type C LED Tube and Driver System - 15-36W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Selectable Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 15W	21W	25W	30W	36W
LumenChoice® + SpectraChoice™ 8 ft T8 Glass Tube - Selectable CCT															
T8	Fa8	93324925	LEDT8/LC/G/8/8SC	10	96	3000K 3500K 4000K* 5000K	80	70,000	-	Damp	1950 2050 2100 2050	2700 2800 2850 2800	3100 3200 3250 3200	3700 3800 3850 3800	4600 4600 4650 4600

8ft T8 Type C LED Tube and Driver System - 15-36W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Selectable Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 15W	21W	25W	30W	36W
8 ft T8 Glass Tubes - Fixed CCT															
T8	Fa8	62327	LED36T8/G/8/835	20	96	3500K	80	50,000	-	Damp	1900	2650	3100	3700	4400
	Fa8	62329	LED36T8/G/8/840	20	96	4000K	80	50,000	-	Damp	1900	2650	3100	3700	4400
	Fa8	62349	LED36T8/G/8/850	20	96	4000K	80	50,000	-	Damp	1900	2650	3100	3700	4400

8ft T8 Type C LED Tube and Driver System - T8 on 36W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Input Watts per Lamp	Lumens (Initial)	2-Lamp 36W Driver
8 ft T8 Glass Tubes - Fixed CCT													
T8	Fa8	62327	LED36T8/G/8/835	20	96	3500K	80	50,000	Yes	Damp	36	4400	63126 LED36T8/DR/D2L
	Fa8	62329	LED36T8/G/8/840	20	96	4000K	80	50,000	Yes	Damp	36	4400	63126 LED36T8/DR/D2L
	Fa8	62349	LED36T8/G/8/850	20	96	4000K	80	50,000	Yes	Damp	36	4400	63126 LED36T8/DR/D2L

[1] The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
[2] Minimum order quantity = Carton Qty
[3] UL 1993 Environmental Requirements for LED LAMPS
Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations
[4] Not all product variations on this page are DLC qualified. Visit qpl.designlights.org/solid-state-lighting to confirm qualification.

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Type C Tubes


CUSTOMER NAME
PROJECT NAME
DATE NOTES

Remote Drivers for Type C LED Tubes

Input Watts (Max.)	Order Code	Description	Input Voltage	Carton Qty[2]	Length (in)	Width (in)	Height (in)	Freq. (Hz)	Power Factor	Output Voltage	Max. Output Current (A)	Min. Temp.[1]	Max Temp.	0-10V Dimmable	Default Wattage per Tube Setting	Additional Information
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
36	93313132	LED/6-18/DR/D2L	120-347 VAC	10	9.5	1.3	1.2	60	>0.9	26-34 VDC	0.53x2	-4° F	104° F	Yes	12W	Max. 2 Tubes: Class 2 Output
72	93313181	LED/6-18/DR/D4L	120-347 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	0.53x4	-4° F	104° F	Yes	12W	Max. 4 Tubes: Class 2 Output
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
66	21379	LED/DR/D4L/LW	120-277 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	0.48x4	-4° F	104° F	Yes	12W	Max. 4 Tubes: Class 2 Output

U1/U6 Adjustable Lamp

Lamps ship 15 per carton with U 1-5/8" tube spacing to minimize carton size




SpectraChoice™

Select color temperature using built-in switch.

U 1-5/8" closed position

Two Lamps in One
Easily transform the U 1-5/8" out of the box into a U 6" lamp by pulling apart the tubes, allowing the hinged frames to fully extend and snap into place.

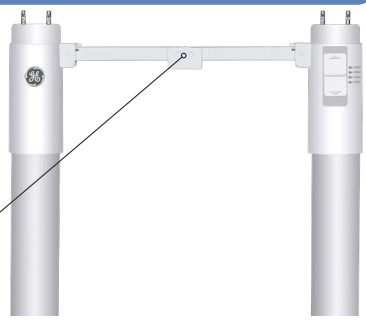

Hinged frames fully extend and snap into place to transform the lamp into U 6" tube spacing

Out of the box: U 1-5/8" configuration



Pull tubes apart to transform the lamp from U 1-5/8" tube spacing to the U 6" tube spacing



U 6" configuration with hinged frames fully extended



LumenChoice® + SpectraChoice™ T8 Type C LED Tube and Driver System - 6-18W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Selectable Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 6W	9W	12W	15W	18W
LumenChoice® + SpectraChoice™ U1/U6 Adjustable Glass Tube - Selectable CCT															
T8	G13	93324924	LEDT8/LC/U/U6/8SC	15	22.6	3000K 3500K 4000K* 5000K	80	70,000	-	Damp	900 900 950 950	1350 1400 1450 1450	1800 1850 1900 1900	2150 2200 2250 2250	2500 2550 2600 2600

LumenChoice® T8 Type C LED Tube and Driver System - 6-18W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 6W	9W	12W	15W	18W
LumenChoice® U1 T8 T8 Glass Tubes - 1-5/8" leg spacing - Fixed CCT															
T8-U1	2G13	28084	LED14T8/U/835	15	22.5	3500K	80	50,000	-	Damp	750	1100	1550		
	2G13	28164	LED14T8/U/840	15	22.5	4000K	80	50,000	-	Damp	750	1100	1550		
LumenChoice® U6 T8 Glass Tubes - 6" leg spacing - Fixed CCT															
T8-U6	2G13	43131	LED15T8/G/U6/830	12	22.5	3000K	80	50,000	-	Damp	700	1050	1450	1700	
	2G13	43135	LED15T8/G/U6/835	12	22.5	3500K	80	50,000	-	Damp	750	1100	1550	1800	
	2G13	43143	LED15T8/G/U6/840	12	22.5	4000K	80	50,000	-	Damp	750	1100	1550	1800	
	2G13	43145	LED15T8/G/U6/850	12	22.5	5000K	80	50,000	-	Damp	750	1100	1550	1800	

[1] The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
[2] Minimum order quantity = Carton Qty
[3] UL 1993 Environmental Requirements for LED LAMPS
Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations
[4] Not all product variations on this page are DLC qualified. Visit qpl.designlights.org/solid-state-lighting to confirm qualification.

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

Type C Tubes

CUSTOMER NAME
PROJECT NAME
DATE NOTES

Remote Drivers for Type C LED Tubes

Input Watts (Max.)	Order Code	Description	Input Voltage	Carton Qty[2]	Length (in)	Width (in)	Height (in)	Freq. (Hz)	Power Factor	Output Voltage	Max. Output Current (A)	Min. Temp.[1]	Max Temp.	0-10V Dimmable	Default Wattage per Tube Setting	Additional Information
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
36	93313132	LED/6-18/DR/D2L	120-347 VAC	10	9.5	1.3	1.2	60	>0.9	26-34 VDC	0.53x2	-4° F	104° F	Yes	12W	Max. 2 Tubes: Class 2 Output
72	93313181	LED/6-18/DR/D4L	120-347 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	0.53x4	-4° F	104° F	Yes	12W	Max. 4 Tubes: Class 2 Output
72	93324881	LED/15-36/DR/D2L	120-347 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	1.06x2	-4° F	104° F	Yes	36W	Max. 2 Tubes: Class 2 Output
LumenChoice® Remote Drivers - Selectable Output for Type C LED Tubes																
66	21379	LED/DR/D4L/LW	120-277 VAC	10	9.5	1.7	1.2	60	>0.9	26-34 VDC	0.48x4	-4° F	104° F	Yes	12W	Max. 4 Tubes: Class 2 Output

LumenChoice® + SpectraChoice™ T5 Type C LED Tube and Driver System - 6-18W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Selectable Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 6W	9W	12W	15W	18W
LumenChoice® + SpectraChoice™ 4 ft T5 Glass Tube - Selectable CCT															
T5	G5	93323642	LEDT5/LC/G/4/8SC	20	46	3500K 4000K* 5000K	80	70,000	-	Damp	1100 1150 1150	1600 1650 1650	2050 2100 2100	2450 2500 2500	2900 2950 2950
LumenChoice® + SpectraChoice™ 3 ft T5 Glass Tube - Selectable CCT															
T5	G5	93323644	LEDT5/LC/G/3/8SC	20	34	3500K 4000K* 5000K	80	70,000	-	Damp	900 950 950	1300 1350 1350	1650 1700 1700	2000 2050 2050	2300 2350 2350
LumenChoice® + SpectraChoice™ 2 ft T5 Glass Tube - Selectable CCT															
T5	G5	93323646	LEDT5/LC/G/2/8SC	20	22	3500K 4000K* 5000K	80	70,000	-	Damp	800 850 850	1200 1250 1250	1550 1600 1600	1800 1850 1850	2100 2150 2150

LumenChoice® T5 Type C LED Tube and Driver System - 6-18W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 6W	9W	12W	15W	18W
LumenChoice® 4 ft T5 HE Glass Tubes - Fixed CCT															
T5	G5	93314792	LEDT5/LC/G/4/835XL	20	46	3500K	80	70,000	Yes	Damp	1150	1700	2150	2650	3050
	G5	93314794	LEDT5/LC/G/4/840XL	20	46	4000K	80	70,000	Yes	Damp	1200	1750	2200	2700	3100
	G5	93314796	LEDT5/LC/G/4/850XL	20	46	5000K	80	70,000	Yes	Damp	1200	1750	2200	2700	3100
LumenChoice® 3 ft T5 HE Glass Tubes - Fixed CCT															
T5	G5	39002	LEDT5LC/G3/840HE	20	34	4000K	80	70,000	-	Damp	900	1300	1650	2000	2300
LumenChoice® 2 ft T5 Glass Tubes - Fixed CCT															
T5	G5	38968	LEDT5/LC/G/2/830	20	22	3000K	80	70,000	-	Damp	800	1200	1550	1800	2150

LumenChoice® + SpectraChoice™ T5 Type C LED Tube and Driver System - 15-36W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Selectable Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 15W	21W	25W	30W	36W
LumenChoice® + SpectraChoice™ 4 ft T5 Glass Tube - Selectable CCT															
T5	G5	93323642	LEDT5/LC/G/4/8SC	20	46	3500K 4000K* 5000K	80	70,000	-	Damp	2450 2500 2500	3400 3500 3500	3950 4050 4050	4650 4750 4750	

LumenChoice® T5 Type C LED Tube and Driver System - 15-36W Driver

Bulb Shape	Base Type	Order Code	Description	Carton Qty[2]	MOL (in)	Color Temp. (Initial)	CRI	Rated Life L70 (Hrs)[1]	DLC®[4]	Location Rating[3]	Initial Lumens at Driver Settings: 15W	21W	25W	30W	36W
LumenChoice® 4 ft T5 HE Glass Tubes - Fixed CCT															
T5	G5	93314792	LEDT5/LC/G/4/835XL	20	46	3500K	80	70,000	-	Damp	2650	3500	4100	4800	5500
	G5	93314794	LEDT5/LC/G/4/840XL	20	46	4000K	80	70,000	-	Damp	2700	3500	4100	4800	5500
	G5	93314796	LEDT5/LC/G/4/850XL	20	46	5000K	80	70,000	-	Damp	2700	3500	4100	4800	5500

[1] The life rating is based on the hours of operation the lamp will provide before reaching 70% of its original lumen output (L70)
[2] Minimum order quantity = Carton Qty
[3] UL 1993 Environmental Requirements for LED LAMPS
Damp Location – Exterior or interior location that is normally or periodically subject to condensation of moisture in, on, or adjacent to electrical equipment, including partially protected locations
[4] Not all product variations on this page are DLC qualified. Visit qpl.designlights.org/solid-state-lighting to confirm qualification.

© 2026 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.