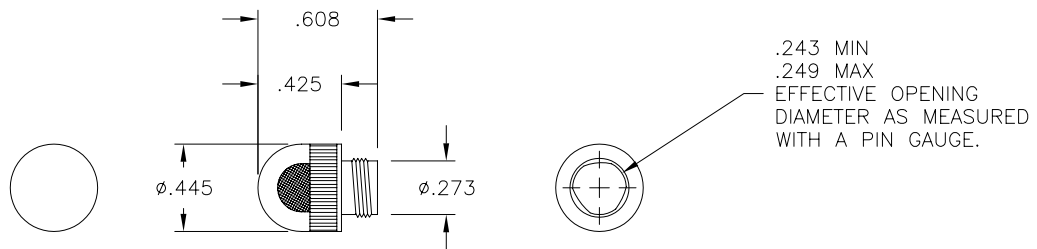


LTR	REVISION	DATE	APPD
C	091409-RTD01: UPDATED DIMENSIONS ON LENS OPENING	09-16-09	GP

**NOTES:**

1. RM820-XX LENS IS RFI/EMI SHIELDED.
2. LENS MEETS MIL SPEC MIL-L-3661/27A.
3. LENS IS HIGH IMPACT PLASTIC.
4. STYLE: LC27
5. TEMPERATURE OPERATING: -55°C TO $+85^{\circ}\text{C}$
6. STORAGE (NONE OPERATING): -65°C TO $+95^{\circ}\text{C}$
7. PARTS WITH (*) ARE "RoHS" CERTIFIED.

RoHS
COMPLIANT
2002/95/EC

COLORS AVAILABLE	
SERIES	COLORS
RM820	RC - CLEAR RED GC - CLEAR GREEN* WC - CLEAR WATER* WT - TRANSLUCENT WHITE RT - TRANSLUCENT RED GT - TRANSLUCENT GREEN AT - TRANSLUCENT AMBER*

REVISION NOTIFICATION

- ☐ PMA
☐ UL
☐ CUSTOMER _____
☐ OTHER

LED[®]
LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary
information of LEDTRONICS, INC.
It may not be copied, used or disclosed
for any purpose without the prior express
written consent of LEDTRONICS, INC.

.XXX $\pm$.010 TOLERANCE PER ANSI-Y14.5
.XX $\pm$.025 (UNLESS OTHERWISE STATED)
ANGLES $\pm$ 0',30'
FRACT. $\pm$ 1/32

TITLE**LENS-RM820-XX****DWG NO**

CMLN0071

SCALE

1:1

SHEET

1 OF 1

DATE

12-01-93

CODE
IDENT NO.
8Z410

DWG BY
WB
12-01-93

CHK BY
PL
09-16-09

QA
RTD
09-16-09

MFG
LD
09-16-09

R&D