

Removable Turn Knob, 3-Way (2-Circuit)

For operating a 2-filament lamp in a sequence of LOW-MEDIUM-HIGH-OFF.

Mandrel threaded #4-36
Interior No. 7090-M, page G9

Cat. No. 7090: Less set screw unless otherwise specified.

• 250W-250V • UL Listed E-3810 • CSA Certified LR-1863 • NOM Certified 057

Per UL 153, 3-way lampholders shall be installed so that bulb will be positioned base down.



Removable Turn Knob, Single Circuit

Knob is removable brown molded plastic.

Mandrel Threaded #4-36
Interior No. 10083-M, page G9

Cat. No. 10083: Less set screw unless otherwise specified.

• 250W-250V • UL Listed E-3810 • CSA Certified LR-1863



Removable Turn Knob 2-Circuit 3-Terminal

Uses single-filament lamp. Wired in series with a keyless socket with single-filament lamp. Switch controls both single-filament lamps in a sequence of:


- (1) keyless ON
- (2) 7070 ON
- (3) both ON
- (4) both OFF

Second socket can be keyless socket for lighting effect or built-in night light. Total power consumption of both lamps must not exceed 250 watts. Removable knob is molded plastic.

Mandrel threaded #4-36
Interior No. 7070-M, page G9

Cat. No. 7070: Less set screw unless otherwise specified.

• 250W-250V • UL Listed E-3810 • CSA Certified LR-1863

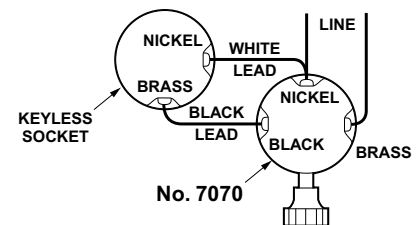

Cat. No. 7070

Larger screw head terminal for easier wiring of two leads.