

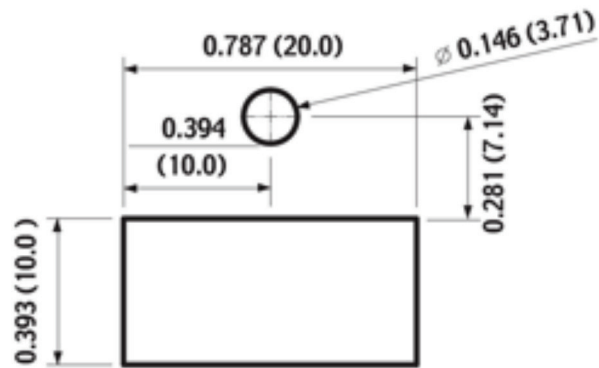


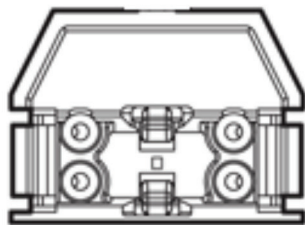

## APPLICATION AND SPECIFICATIONS

- 120w - 600v
- G5 miniature bipin
- Unshunted
- Rotary locking
- Tall profile
- No locator pin (stop)
- Thermoplastic
- Certification(s): cULus (UL E5833, cUL E5833), CUS, CSA listed certified LR-1863, NOM certified 057
- Lamp Axis: 24.9mm
- Push fit - Slide on
- Quick Connects
- Overall Height: 1.47"

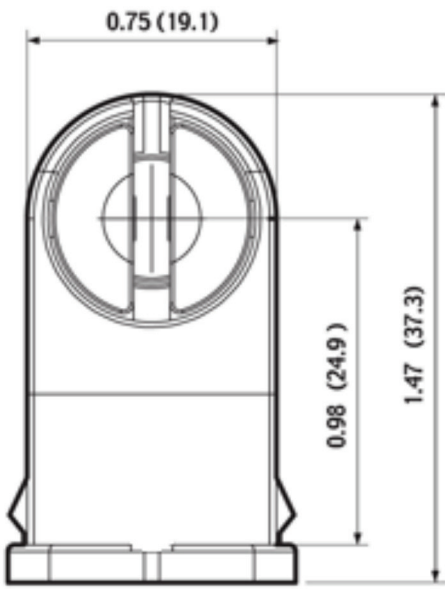

**PANEL CUTOUT**  
20-23 gauge panels