

LR38

PAR 38 | LED LAMP

SOLAIS®

PROJECT

TYPE

SPECIFICATION

- 120 V
 - 50,000 Hours (L70)
 - Halogen PAR form factor (ANSI compliant)
 - Lightest LED lamps on the market
 - RoHs-compliant
 - Dry location rating
 - ETL Certified to UL Standard 1993
 - Contain no lead or mercury
 - Fully dimmable; Compatability list available.
-
- Base Types: E26 Standard; GU24*
 - Recommended for use in open environment fixtures
 - Approved for use in recessed IC and non-IC rated fixtures with open apertures only
-
- **VioLight** color rendering enhancements available
 - *90+ High CRI available for 27K and 30K. Consult factory for availability in other color temperatures. To order, replace 'K' in CCT designation with 'h' in code below.




Ordering Information

Example: LR38/25/30K/1600/WH

Lamp	Beam Spread	CCT	Lumens	Housing Color
LR38	15 25 40	27K / 30K / 35K* / 40K* / 30v /	1600 1600 1600 1600 1850	WH - White SL - Silver* BK - Black*
		27K / 30K / 35K* / 40K* /	2400 2400 2400 2400	



Weight: 9.4 oz.

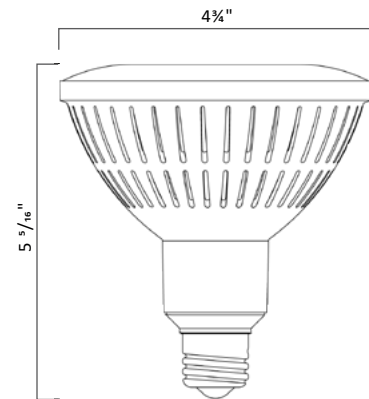

*Consult factory for lead time and availability

Note: VioLight and High CRI products will produce up to 20% less measured lumens than their standard CCT equivalent; Although, perceived lumens will be noticeably higher than their standard counterparts.



Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.



Thermal Throttle – In the event that Solais products begin to overheat, they will undetectably dim themselves to protect your technology investments.



Warranty



IES Files



Dimmers

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**



VIOLIGHT™

VioLight radiates superior quality, enhancing colors in merchandise, making colors more vibrant and offering a truly competitive LED replacement for CMH-like crispness.

SOLAIS
LIGHTING GROUP

Solais + EnergyLite | 8655 Corporate Drive, Suite 100 | Frisco, TX 75033 | 469.294.1516

©Solais Lighting, LLC | All rights reserved | www.solais.com | LR - 08/2020

LR38

PAR 38 | LED LAMP

SOLAIS[®]

PROJECT

TYPE

SPECIFICATION

Product Code				Power (Watts)	CBCP (cd)	Standard CRI		
Lamp	Beam Angle	CCT	Delivered Lumens					
	15	27K	1600	17	13100	83		
	25				8150			
	40				3200			
	15	30K			13100			
	25				8150			
	40				3200			
	15	27K	2400	26	19650			
	25				12350			
	40				4800			
	15	30K			19650			
	25				12350			
	40				4800			
	15	30v	1850	22	15140	85		
	25				9420			
	40				3700			



Warranty



IES Files



Dimmers



THEROTTLE

Thermal Throttle – In the event that Solais products begin to overheat, they will undetectably dim themselves to protect your technology investments.



VIOLIGHT™

VioLight radiates superior quality, enhancing colors in merchandise, making colors more vibrant and offering a truly competitive LED replacement for CMH-like crispness.



LUXIANCE®

Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**

SOLAIS
LIGHTING GROUP

Solais + EnergyLite | 8655 Corporate Drive, Suite 100 | Frisco, TX 75033 | 469.294.1516

©Solais Lighting, LLC | All rights reserved | www.solais.com | LR - 08/2020