

Solais Lighting | LR38sp LED Lamp

Solais LED PAR38 side-prong lamp replacement

Product Description: The Solais LED PAR38 side-prong lamp replacement has the high light output, light weight and full dimming capabilities of halogen incandescent sources – resulting in a high-performance product perfect for commercial, museum, retail and hospitality applications.

Performance Summary: Fully dimmable | Halogen PAR38 side-prong form factor | Certified to UL Standard 1993 | RoHS-compliant Contain no lead or mercury | Dry location rating

Application: Designed for use in track and recessed fixtures (including IC rated housing)

Voltage: 120v Standard

CCT: 3000K

Dimmable: Yes - Visit solais.com/dimming.php for compatibility list

Life: 50,000 Hours (L70)

Base Type: Medium side prong

Weight (oz.): 9.4



Product Code	Power (Watts)	Beam Angle	CCT (K)	Lumen Output	CBCP (cd)	CRI
LR38sp/15/30K/1250/WH	17	15°	3000	1250	10250	83
LR38sp/25/30K/1250/WH	17	25°	3000	1250	6375	83
LR38sp/40/30K/1250/WH	17	40°	3000	1250	2500	83


Housing Color: White (WH)

Ordering Information

Example: LR38sp/15/30K/1250/WH

LR38sp	/		/	30K	/	1250	/	WH
Form Factor (PAR38) LR38sp		Beam Angle 15 25 40		CCT 30K		Lumens 1250		Housing WH - White

Lamp Images

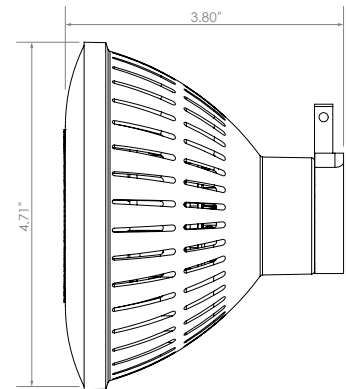

Beam Angles



15°



25°



40°

Color Temperature

3000K

Housing Colors

White

Solais Lighting | LR38sp LED Lamp

LUXIANCE®
powered by SOLAIS

Luxiance utilizes active cooling to remove heat from the LED system - allowing Solais LED lamps to operate cooler, resulting in superior life, light output, and performance.

THEROTTLE™
powered by SOLAIS

Thermal Throttle – In the event that Solais LEDs become overheated, they will dim themselves to protect your technology investments.

LIMITED WARRANTY: Solais Lighting warrants that our lamps and fixtures will operate for a period of five (5) years from the date of purchase or 25,000 hours, whichever comes first, when used in accordance with package and lamp directions. If your Solais product does not last for the warranty period, please send your name and address, the product you are returning, register receipts and proof of purchase to the address listed on our website. This limited warranty does not cover products subject to misuse, electrical current fluctuation, accident, neglect, or acts of God. THIS REPLACEMENT OR REPAIR IS THE SOLE WARRANTY OBLIGATION OF SOLAIS AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. LIABILITY FOR INCIDENTAL AND CONSEQUENTIAL DAMAGES EXCLUDED.

For complete warranty terms and conditions, please see: www.solais.com/warranty

WARNING: Not for use in fully enclosed luminaires. Risk of electric shock. Use in an indoor, dry location only. This device is not intended for use with emergency exit fixtures or emergency exit lights. May not be compatible with all dimmers; please visit solais.com/dimming for up-to-date dimmer compatibility information.

NOTES: This device complies with Part 15 of the FCC Rule. This product may cause interference with other devices. If interference occurs, change the locations of the products involved. **Compatible on 120v systems.**