



LT-CD™ Series

Volumetric LED Troffer - Field Adjustable

DESCRIPTION

The Aleo LT-CD™ (SR/RC) Series LED Field Adjustable Troffer delivers industry-leading Versatility with deep energy savings and continuous dimming. The precision-formed diffuser produces comfortable and pleasant illumination, enhancing productive spaces in various applications.

APPLICATIONS

Provides architectural aesthetics for retail, schools, offices, healthcare, and other commercial applications.

LT-CD™ SERIES

2x4 25W / 30W / 35W

2x2 20W / 25W / 30W

1x4 20W / 25W / 30W

QUICK SHIP

LT-CD-24-UXL-35/8CT G6 (SR/RC)

LT-CD-22-UXL-30/8CT G6 (SR/RC)

LT-CD-14-UXL-30/8CT G6 (SR/RC)

SPECIFICATION FEATURES

CONSTRUCTION

Simple construction with minimal parts allows for easy handling and installation. Low profile design optimizes shipping, storage, and handling. Luminaire features matte white durable finish. Integral T-Bar clips built into luminaire. Diffuser requires no additional frame or fastener for easy installation.

OPTICAL SYSTEM

Reflector systems features highly reflective coating and delivers balanced, comfortable illuminance for productive spaces. Diffuser lens reduces glare and improves occupant comfort while maintaining high efficiency emission.

CERTIFICATION

UL Listed. All components have UL certification. UL Class 2. Driver: SCP, OTP, OVP protection, FCC Part 15 Class B, UL8750 Class 2. DLC Listed.

WARRANTY

7-year Limited Warranty. See warranty documentation for more information.

ELECTRICAL

Luminaire utilizes high-efficacy LED packages maintained at cool temperatures for long life, high efficacy. Reliable driver features continuous dimming. Universal voltage (120-277V) for convenient installation. Comes equipped with luminaire quick-disconnect.

INSTALLATION / MOUNTING

Installs in most standard T-Bar ceiling grid systems. Flange kit available for hard-lid/drywall applications.

CONTROLS / DIMMING

Continuous dimming (0-10V) comes standard. Suitable for use with dimmers, sensors, daylight harvesting and other control strategies to achieve deeper energy-savings and code compliance.

FIELD ADJUSTABLE CCT

Increased versatility and reduced inventory burden. Wattage and Color Temp. can be adjusted in the field by selecting (3) different wattages and (3) different CCTs via switch on driver. can be adjusted in the field by selecting (5) different wattages and (5) different CCTs via switch on driver box.

ORDERING INFORMATION

EXAMPLE: LT-CD-24-UXL-35/8CT G6 (SR/RC)

LT-CD	24	UXL	34	8	CT	[Blank]	[Blank]
Series	Form Factor	Lumen Package	Nominal Max Wattage	CRI	Color Temp	Input Voltage	Dimming
LT-CD Volumetric LED Troffer - Center Diffuser	24 - 2'x4' 22 - 2'x2' 14 - 1'x4'	UXL Field Adjustable	2'x4' 35 25W / 30W / 35W 2'x2' 30 20W / 25W / 30W 1'x4' 30 20W / 25W / 30W	8 83+	CCT Field Adjust. 3500K 4000K 5000K *Utilize 3-way switch to select	Blank 120V-277V	Blank 0-10V Continuous Dimming


Options

Sensor	Controls	Emergency Backup¹	Designation
(SR/RC) Sensor Ready with Sensor Receptacle	See Pg. 4 for details on sensors and controls (Sensor Sold Separately)	EM700 700lm EM1400 1400lm	BAA BABAA Buy America Act Compliant Build America, Buy America Act Compliant


Specifications and Dimensions subject to change without notice.



FIELD-ADJUSTABLE CCT & WATTAGE

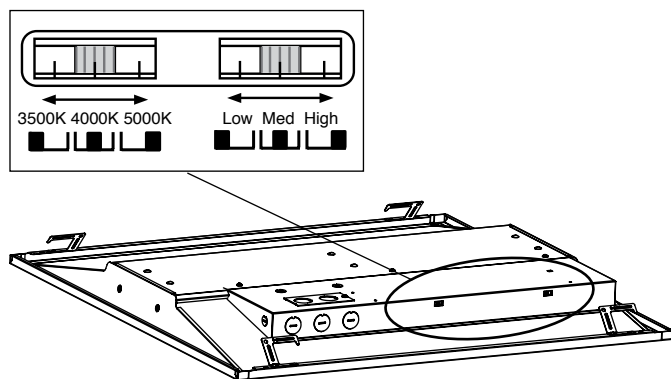

MOUNTING INFORMATION

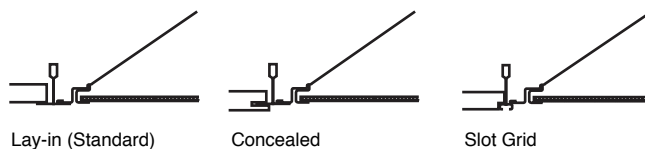

* Fits 9/16, 15/16 and SS T-bar grid.
Flange kit available upon request

PERFORMANCE SUMMARY

Input Voltage	120V-277V	Color Consistency	5-step MacAdam Ellipse
Input Frequency	50/60 Hz	Rated Life	75,000 hours
Rated Wattage	See Performance Table	L70	> 72,000 hours
Delivered Lumens	See Performance Table	Power Factor	> 0.9
Efficacy	> 133 LPW (typ.)	THD	< 20%
CRI	82+, R9 > 0	Dimming	0-10V Continuous (10-100%)
Available CCT	3500K / 4000K / 5000K	Operating Temp.	-20°C to 50°C

DLC QPL DATA

QPL Model No.	Product ID	Technical Req.	Classification	Primary Use
LT-CD-24-UXL-35/8CT G6 (SR/RC) [-YYXX/ZZ]	S-22S36V	5.1	Standard	2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces
LT-CD-22-UXL-30/8CT G6 (SR/RC) [-YYXX/ZZ]	S-GY4TGW	5.1	Standard	2x2 Luminaires for Ambient Lighting of Interior Commercial Spaces
LT-CD-14-UXL-30/8CT G6 (SR/RC) [-YYXX/ZZ]	S-0N7W33	5.1	Standard	1x4 Luminaires for Ambient Lighting of Interior Commercial Spaces



¹ IMPORTANT: THE BATTERY MUST BE RECHARGED EVERY THREE (3) MONTHS. IF NOT RECHARGED ACCORDINGLY, BATTERY MAY FAIL AND VOID WARRANTY
Specifications and Dimensions subject to change without notice.




PERFORMANCE DATA

	Catalog No.	Rated Wattage (W)	3500K		4000K		5000K	
			Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
2' x 4'	LT-CD-24-UXL-35/8CT G6 (SR/RC)	25	3,500	140	3,750	150	3,600	144
		30	4,080	136	4,380	146	4,200	140
		35	4,655	133	5,005	143	4,795	137
2' x 2'	LT-CD-22-UXL-30/8CT G6 (SR/RC)	20	2,820	141	2,980	149	2,840	142
		25	3,425	137	3,625	145	3,450	138
		30	4,020	134	4,260	142	4,050	135
1' x 4'	LT-CD-14-UXL-30/8CT G6 (SR/RC)	20	2,840	142	3,080	154	2,880	144
		25	3,450	138	3,750	150	3,500	140
		30	4,020	134	4,380	146	4,080	136


PRODUCT DIMENSIONS

MOQ Carton Qty: 2


LT-CD-24

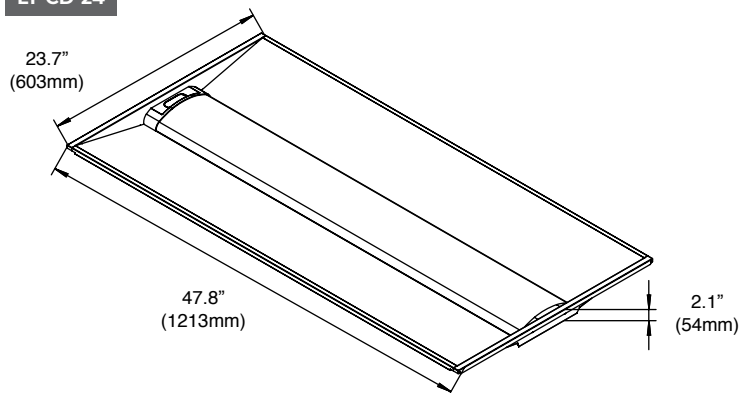

LT-CD-22

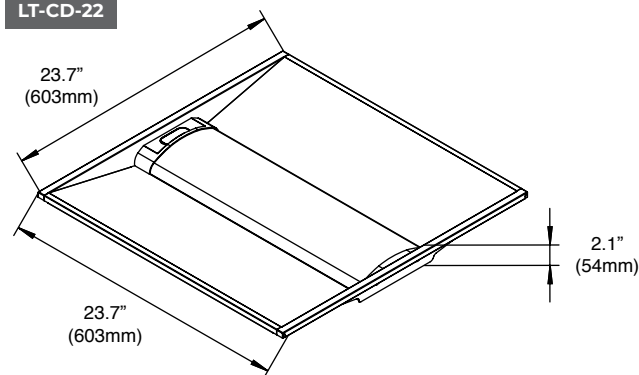

LT-CD-14

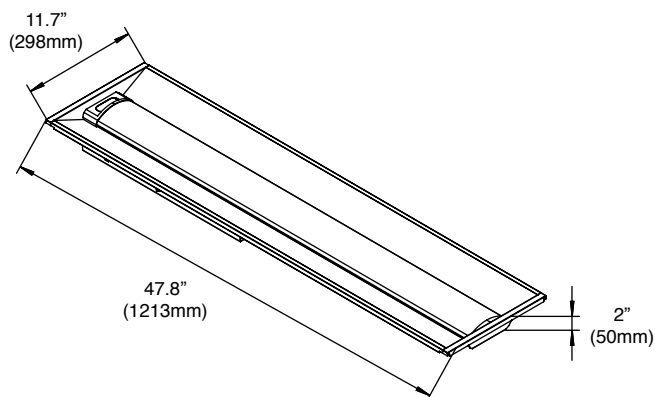

Specifications and Dimensions subject to change without notice.

PRODUCT OPTIONS

SENSOR OPTIONS


Catalog No.	Description	Ordering	Shipping	Remote Control	Sensor Mounting
AB-SPIR-FM-DVE	AleoBlue Multi-level Wireless Bluetooth Occ Sensor w/ Daylight	Order and Ship Separately	Field Install	AleoBlue App	Snap-in
SPIR-OSDL/BTEZ-PP3-DC-121	SimplBlue Multi-level Wireless Bluetooth Occ Sensor w/ Daylight	Order and Ship Separately	Field Install	SimplBlue App	Snap-in



SURFACE MOUNT KITS


SMK-24 G2 ECO

Surface Mount Kit for 2'x4' troffer or panel

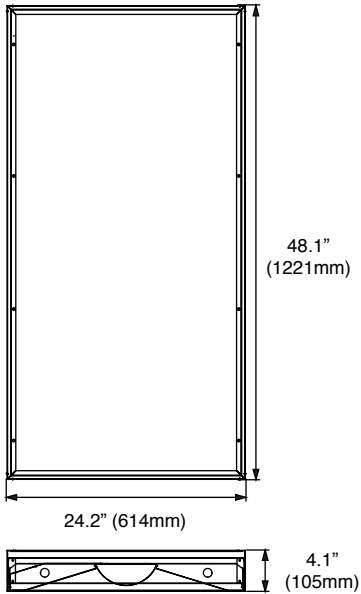



SMK-22 G2 ECO

Surface Mount Kit for 2'x2' troffer or panel

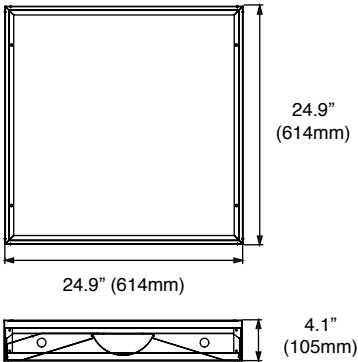

SMK-14 G2 ECO

Surface Mount Kit for 1'x4' troffer or panel

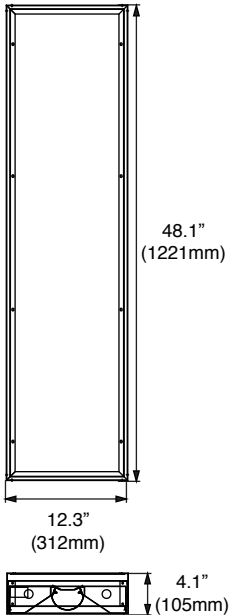


Specifications and Dimensions subject to change without notice.

FLANGE KITS


FK-LT-24

Flange Kit for 2'x4' troffer or panel

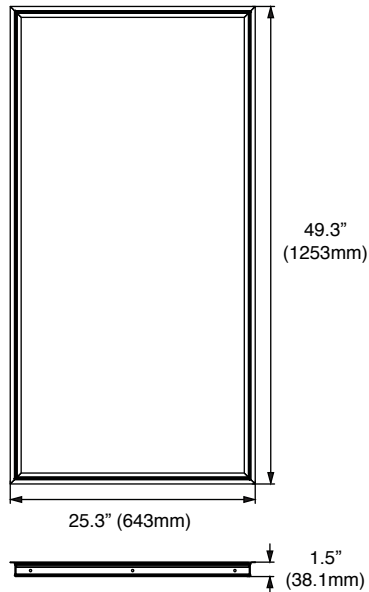



FK-LT-22

Flange Kit for 2'x2' troffer or panel

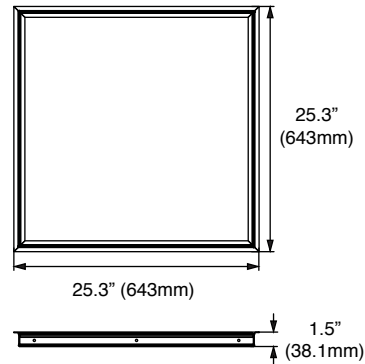

FK-LT-14

Flange Kit for 1'x4' troffer or panel

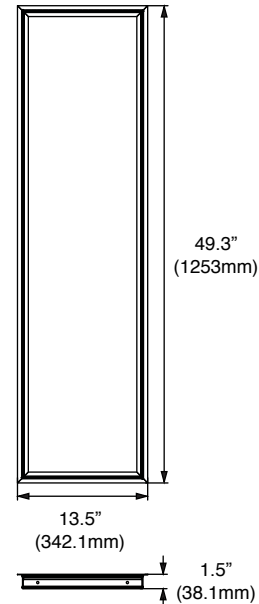

BAA AND BABAA COMPLIANT

BAA - BUY AMERICA ACT COMPLIANT

Complies and Qualifies for projects requiring Buy America Act (BAA) compliant product

BABAA - BUILD AMERICA, BUY AMERICA COMPLIANT

Complies and Qualifies for projects requiring Build America, Buy America Act (BABAA) compliant product



*Note: BAA and BABAA product will require lead times approximately ranging from 12-18 weeks. Contact your Aleo representative for more information

aleoblue™

LOOKING FOR ADDITIONAL ALEOBLUE CONTROL DEVICES?

Enhance your lighting system with optional AleoBlue control devices designed to expand functionality and simplify installation. [Click here](#) or scan the QR code to view all currently available options.



aleo | LIGHTING + CONTROLS

ALEOBLUE WIRELESS BLUETOOTH® CONTROLS




The AleoBlue is a complete solution for managing connected lighting systems using a Bluetooth® NLC lighting network. This enables seamless implementation of simple to complex lighting control scenarios without specialized training or lighting control engineering expertise.


DLC NLC Qualified.

FEATURES AND BENEFITS


- Lighting Zones / Grouping
- Manual control of individual lights
- On Power up Behavior
- Zone Linking
- High-End Trim
- LLLC (Luminaire Level Lighting Controls)
- Energy Monitoring
- Optimized Energy Consumption
- Less Hassle with On-Site Adjustments
- More Savings
- Increased Safety
- More Flexibility
- Intuitive and user-friendly web and iOS apps
- No specialized training or lighting control expertise required
- Optimized for commercial spaces of any size
- No additional wiring or central control box
- Customizable lighting control parameters
- Future proof with Software Updates
- Multiple Zone Configurable
- Built-In Scenarios + Customization

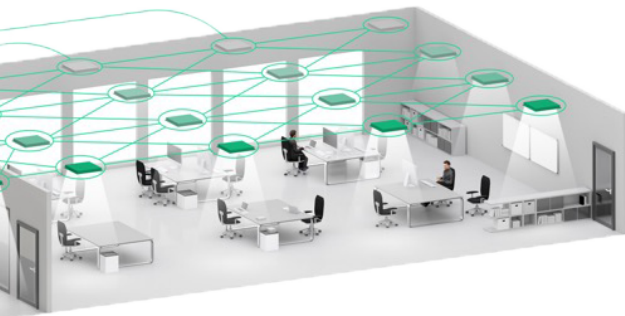

SCHEDULING



SCENES



BLUETOOTH® NLC TECHNOLOGY ADVANTAGES



The fastest low-power communication



Scalability to thousands of devices



The most advanced encryption standards as well as the cutting-edge device authentication



No single point of failure (no central device)




Compatibility with a widely available devices (smart phones & tablets – both with Bluetooth® 4.0 and Bluetooth® 5)

HIGH / LOW END TRIM




OCCUPANCY SENSING





PLANNING

Remote preparation of a retrofit project with the use of our web app. Uploading floor plans, defining individual lighting zones and choosing lighting control scenarios.

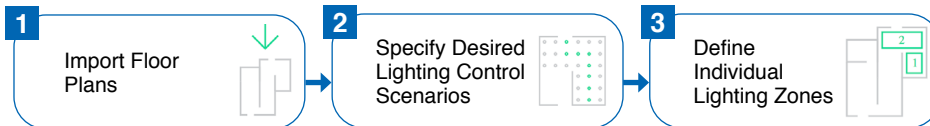

IMPLEMENTATION

Adding lighting devices to the Bluetooth® NLC network on-site with the use of an iOS app. Customization and calibration of lighting control parameters during and after the commissioning process. Defining scenes for specific working activities.

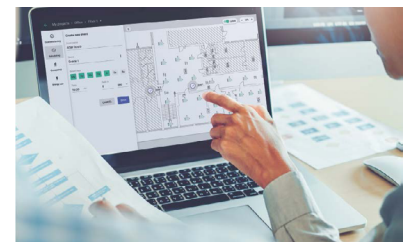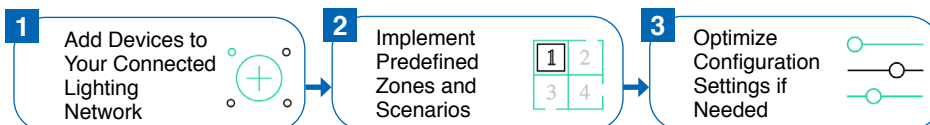

PROVISIONING / CONFIGURATIONS

The Bluetooth® NLC Node is in the Unprovisioned Mode until it is provisioned by a "Provisioner", which typically is a smart phone with a Bluetooth® NLC compatible app.