



Project Name:

Notes:

Distribution Partner:



SPHERE-SPECTRORADIOMETER METHOD (5000K)

Parameter	Result	
Test Voltage (V)	120.0	277.0
Voltage frequency (Hz)	60	60
Test Current (A)	0.498	0.219
Power Factor	0.9872	0.9672
Test Power (W)/2	29.46	29.39
THD A%	9.64	16.48
Luminous Efficacy (lm/W)	118.0	119.0
Total Luminous Flux (lm)	3476.3	3497.4
Color Rendering Index (CRI)	81.8	
R9	4.5	
Correlated Color Temperature (CCT)(K)	4943	
Chromaticity Chroma x	0.3474	
Chromaticity Chroma y	0.3608	
Chromaticity Chroma u	0.2095	
Chromaticity Chroma v	0.3263	
Duv	0.0036	
Chromaticity Chroma u *	0.2095	
Chromaticity Chroma v *	0.4894	

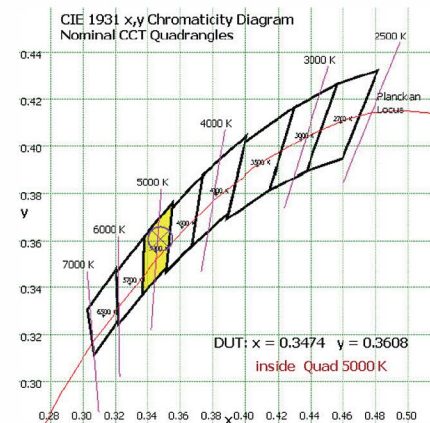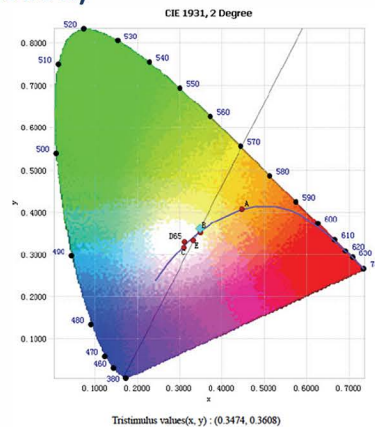


Special Color Rendering Indices													
R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
79.3	86.9	92.3	80.6	79.5	81.4	87.8	66.5	4.6	68.6	78.8	56	71.2	95.9

MECHANICAL CHARACTERISTICS

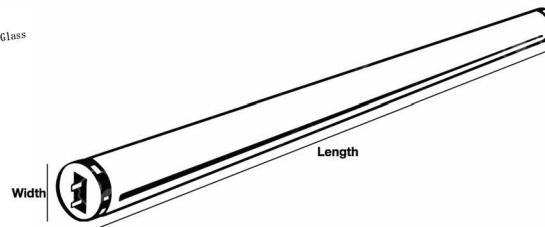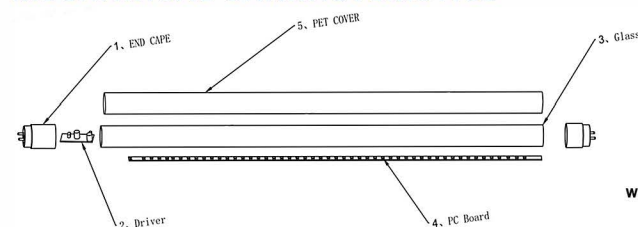

Lamp:	LED T5
Construction:	All Glass
Width:	0.69"
Length:	4FT
Base:	G5

BALLAST COMPATIBILITY**

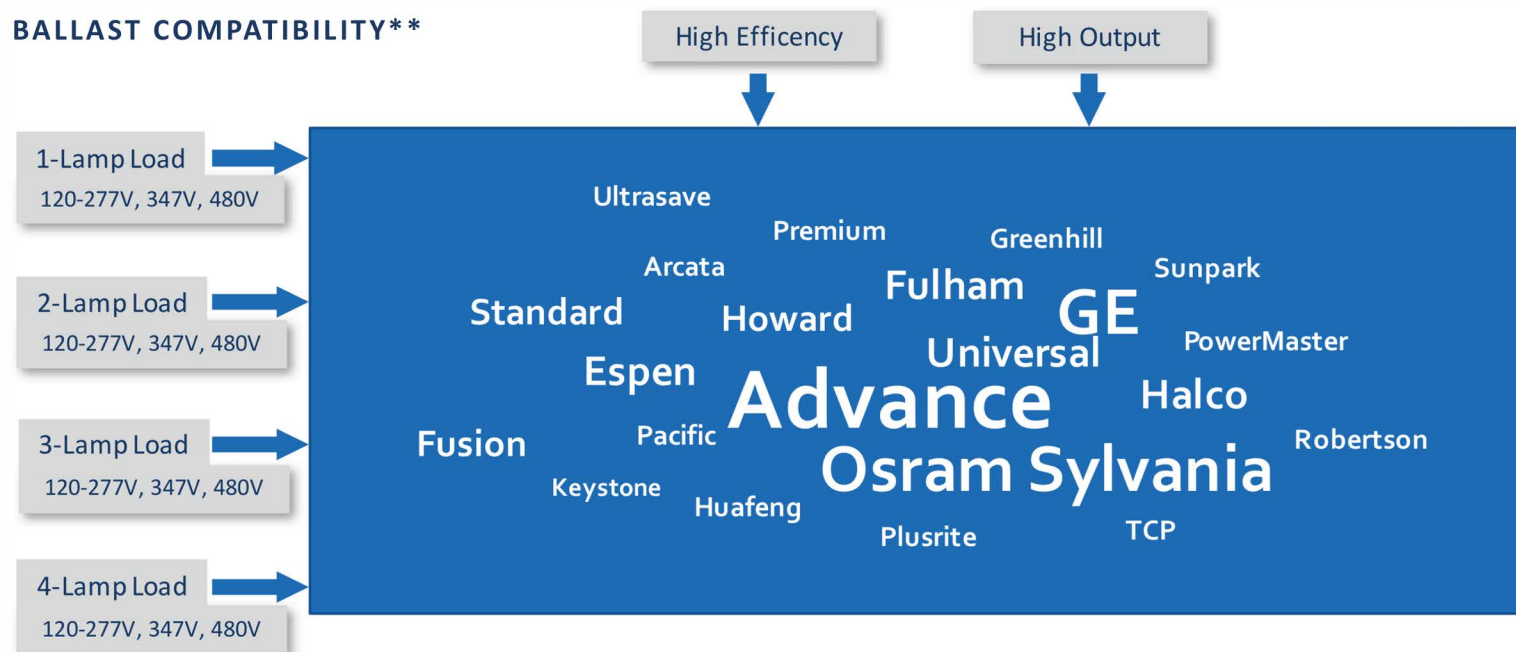

** Visit www.archipelagolighting.com for the up-to-date ballast compatibility list.