

GENERAL INFORMATION

LED Driver Type	Constant Voltage (Class 2)
Maximum Wattage	4 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz

CASE STYLE: POLYCARBONATE



ELECTRICAL SPECIFICATIONS

Watts	Output Voltage	Max Output Current	Input Voltage	Input Current	Power Factor	Efficiency	Hatch Part Number
4W	12 VDC	0.33A	120 - 277 VAC	0.12/0.06A	>0.40	70%	LV004W-12-UNV
	16 VDC	0.25A	120 - 277 VAC	0.12/0.06A	>0.40	70%	LV004W-16-UNV
	24 VDC	0.17A	120 - 277 VAC	0.12/0.06A	>0.40	70%	LV004W-24-UNV

PRODUCT FEATURES


- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Surge voltage rating: L-N 2kV
- Operating temperature range: -20°C to 85°C (measured at Tcase)
- Output Voltage tolerance +/- 5% @ 25°C
- 10% minimum load

APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class A) Non-consumer limits



MECHANICAL SPECIFICATIONS

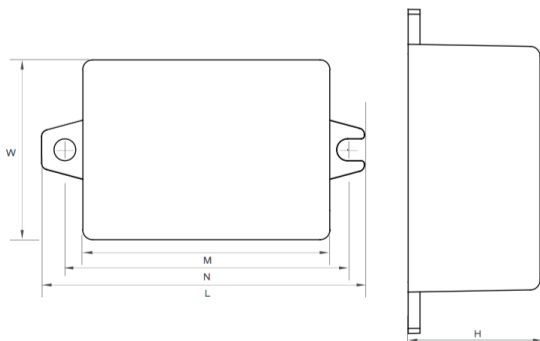

DIMENSIONS

in [mm]

Length:	1.93 [49]
Width:	1.07 [27.2]
Mounting (M):	1.48 [37.5]
Mounting (N):	1.69 [42.9]
Height:	0.79 [20]

WIRING INFORMATION

Input:	7", Black (L), White (N) #20AWG
Output:	9", Red (+), Black (-) #22AWG

PACKAGING INFORMATION

Weight:	4.1oz
Quantity:	160pc/carton

WARRANTY

- 5 year limited warranty