

Prestige™ Edge-Lit Series

Premium die-cast aluminum exit sign



Construction

- Housing, trim plate, trim ring and canopy made of die-cast aluminum
- U-shaped clear acrylic Legend panel features laser-etched letters and chevrons
- 6 inch EXIT lettering legend, available in red or green
- 8 inch EXIT lettering legend, available in red
- Choice of finishes: white, black or brushed aluminum, polished brass, polished chrome or bronze

Mounting

- Modular design allows for surface or recessed mount
- Canopy included for surface wall, end or ceiling mount applications
- Trim ring included for recessed wall or ceiling mount applications.
- Housing provided with conduit knock-out 1/2", top, back and end
- (C) circular or (A) angular trim plate used for surface or recessed wall or ceiling mount applications
- Hanger bars included for lay-in installation in t-bar grid

Special wording panels

- Available. Contact your sales representative with your design requirements

Electronics

- Optional **Advanced Diagnostics**
- Optional **Nexus®** monitoring system
- 120-277 50/60Hz

Approvals


- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- E-California Energy Commission Title 20

Warranty


- Unit has a five year limited warranty
Detailed warranty terms located on page 202 or online at:
www.emergi-lite.com/usa/files/el_warranty.pdf




Mounting configurations

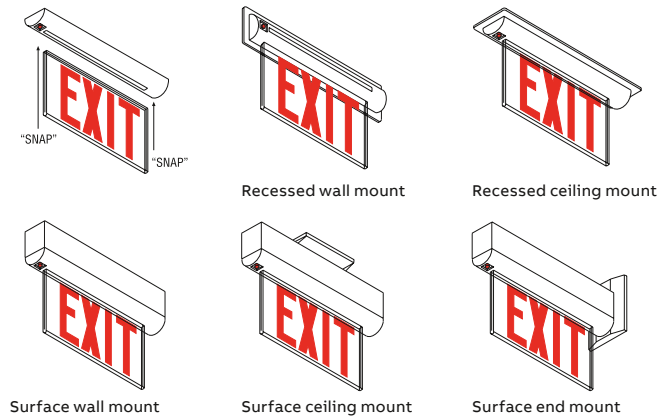


Trim plates

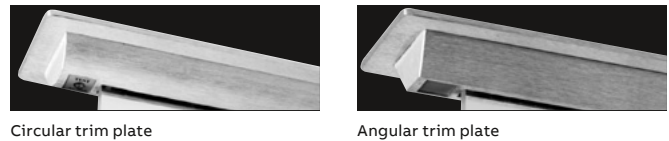

Recessed models

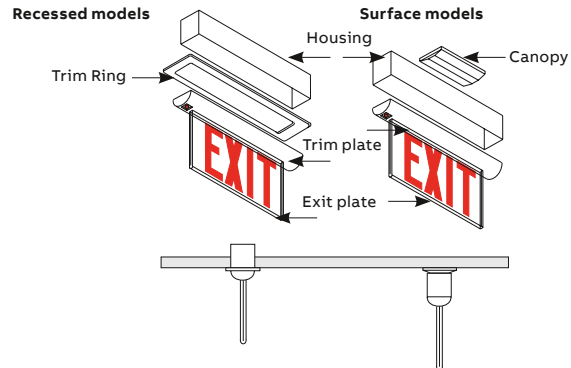


Arrow (chevron) designation




Wording and chevrons not to scale. For illustration purposes only.

Housing color

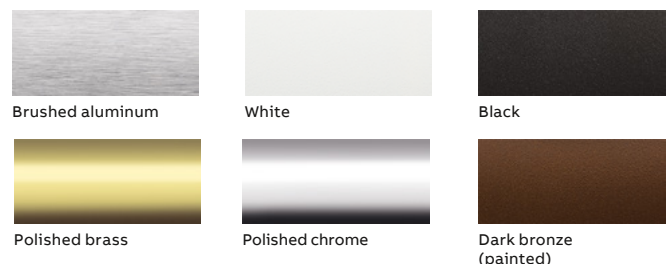

Dimensions

Dimensions are approximate and subject to change.

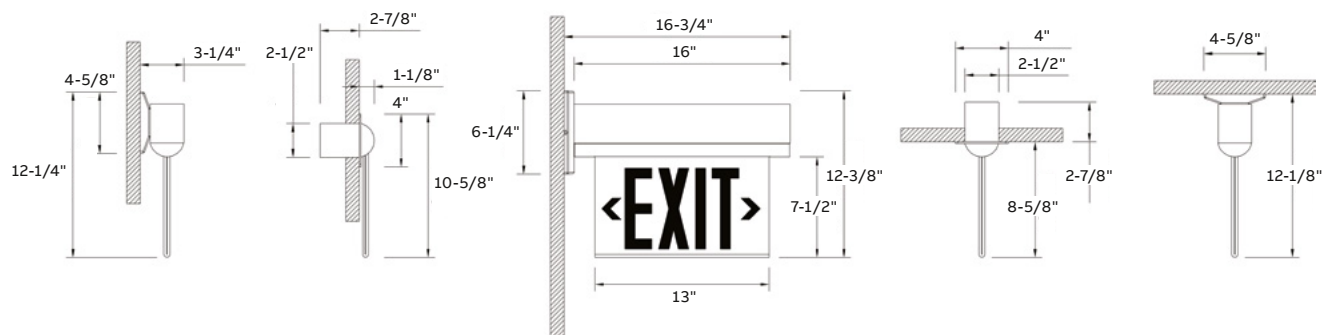

Power consumption

Model	AC specs		DC specs	
AC-only	120 to 277VAC, 50/60Hz	Less than 1.4W	–	–
AC/DC-remote	120 to 277VAC, 50/60Hz	Less than 1.4W	6 to 24VDC	Less than 1.4W
Self-powered	120 to 277VAC, 50/60Hz	Less than 2.3W	Ni-Cd battery	Min. 90 minutes
Self-powered diagnostic	120/277VAC, 50/60Hz	Less than 2.3W	Ni-Cd battery	Min. 90 minutes

Accessories (order as a separate item)

Description	Suffix ¹
White pendant	P*-WT
Black pendant	P*-BK
Gray pendant	P*-GY

¹Custom pendant lengths and colors available, specify (12", 24", 36", etc.)

How to order

Housing color	Series	Faces	Designation	Legend color	Background color	Arrows
Blank= Brushed aluminum	LX= AC-only	1= Single face	N= New design	R= Red	C= Clear (single face only)	Blank= No arrow
W= White	LXN= Self-powered	2= Double face		G= Green	W= White	D= Double arrow
B= Black					M= Mirror	L= Arrow left
PB= Polished brass						R= Arrow right
CH= Polished chrome						RL= Right & left (double face)
BR= Bronze						UA= Universal field installed arrows
Trim	Mounting	Options			Legend size	
-C= Circular	Blank= Universal mount	Blank= No option			Blank= 6" EXIT legend	
-A= Angular		-NEXP= Nexus®Pro IoT ¹ (consult your sales representative)			-8= 8" EXIT legend (red only)	
		-NEXRF= Nexus® wireless ¹ (consult your sales representative)			-LP= Panel shipped separately	
		-D= Self-test and diagnostic ¹			-X= Back box shipped separately	
		-DC= AC/DC remote 6-24 VDC				
		-FA= Fire alarm ¹				
		-FZ= Flasher & buzzer ¹				
		-2CKT= Two circuit, AC only				
		-INV= Inverted panel for mullion mount				

Example: WLXN2NRWRL-A-D

¹Self-powered only