

QWIK MOD™ 12V 12 VDC

12V LED channel letter illumination



Specifications

Qwik Mod

Dimensions L × W × H Qwik Mod 1 1.4" × 0.69" × 0.25"
 Qwik Mod 2 2.2" × 0.69" × 0.25"
 Qwik Mod 3 3.14" × 0.69" × 0.25"
 Qwik Mod 4 1.77" × 1.7" × 0.25"

Beam angle 170° Ultra-wide low dome batwing optic
 with diamondback optic lens technology

Mounting options Peel & Stick and mechanical screw hole

Operating temp -30° C to +60° C

Environment IP68

Spacing Qwik Mod 1 2.5 mods/ft
 (fully-stretched) Qwik Mod 2 1.7 mods/ft
 Qwik Mod 3 & 4 1.5 mods/ft

Qwik
Mod 4

Qwik
Mod 3

Qwik
Mod 2

Qwik
Mod 1

**Qwik Release
Tab reduces
labor time**



Wire color Whites White solid (+) /
 White/Black stripe (-)*
 Colors Gray, Red, Green, or Blue
 solid (+) / White/Black stripe (-)

Warranty 10-Year Product / 5-year Limited Labor

Product	Max. mods (series)	CCT/Wavelength	SKU	Intensity	Efficacy	Packaging	UL number
Qwik Mod 1	75 mods (30 ft)	7100 K	M-QMSX0-71	47.2 lm/mod (118 lm/ft)	118 lm/W	Mods per bag: 150 (60 ft) Mods per case: 1500 (600 ft)	PL-QM1-TW110-P
		5000 K	M-QMSX0-50				PL-QM1-NW110-P
		4100 K†	M-QMSX0-41				PL-QM1-MW110-P
Qwik Mod 2	38 mods (22.35 ft)	7100 K	M-QMDX0-71	94.1 lm/mod (160 lm/ft)	118 lm/W	Mods per bag: 76 (44.7 ft) Mods per case: 912 (536.52 ft)	PL-QM2-TW150-P
		5700 K†	M-QMDX0-57				PL-QM2-WN150-P
		5000 K	M-QMDX0-50				PL-QM2-NW150-P
		4100 K†	M-QMDX0-41				PL-QM2-MW150-P
		3500 K†	M-QMDX0-35				PL-QM2-WW150-P
		3000 K	M-QMDX0-30				PL-QM2-DW150-P
		2700 K	M-QMDX0-27				PL-QM2-IW150-P
		Red (625 nm)	M-QMDX0-RD	22 lm/mod (37.4 lm/ft)	27.5 lm/W		PL-QM2-RD37-P
		Amber (589 nm)	M-QMDX0-AM	20.4 lm/mod (34.68 lm/ft)	22.93 lm/W		PL-QM2-AM150-P
		Red-Orange (613 nm)	M-QMDX0-RO	29.97 lm/mod (50.95 lm/ft)	34 lm/W		PL-QM2-RO150-P
		Orange (617 nm)	M-QMDX0-OR	25.66 lm/mod (43.62 lm/ft)	29.68 lm/W		PL-QM2-OR37-P
		Green (525 nm)	M-QMDX0-GR	44 lm/mod (75 lm/ft)	53.51 lm/W		PL-QM2-GR75-P
		Blue (460 nm)	M-QMDX0-BL	10 lm/mod (17 lm/ft)	12.31 lm/W		PL-QM2-BL17-P
Qwik Mod 3	25 mods (16.67 ft)	7100 K	M-QMTX0-71	136.7 lm/mod (205 lm/ft)	114 lm/W	Mods per bag: 50 (33.3 ft) Mods per case: 750 (500 ft)	PL-QM3-TW200-P
		5000 K	M-QMTX0-50				PL-QM3-NW200-P
		4100 K†	M-QMTX0-41				PL-QM3-MW200-P
		Red (625 nm)	M-QMTX0-RD	34 lm/mod (51 lm/ft)	28.33 lm/W		PL-QM3-RD51-P
		Amber (593 nm)	M-QMTX0-AM	33.44 lm/mod (50.16 lm/ft)	26.42 lm/W		PL-QM3-AM200-P
		Red-Orange (610 nm)	M-QMTX0-RO	67.86 lm/mod (101.78 lm/ft)	52.5 lm/W		PL-QM3-RO200-P
		Orange (612 nm)	M-QMTX0-OR	63.77 lm/mod (95.66 lm/ft)	50.06 lm/W		PL-QM3-OR200-P
		Green (525 nm)	M-QMTX0-GR	86 lm/mod (129 lm/ft)	68.61 lm/W		PL-QM3-GR129-P
		Blue (460 nm)	M-QMTX0-BL	18 lm/mod (27 lm/ft)	14.81 lm/W		PL-QM3-BL27-P
Qwik Mod 4	19 mods (12.67 ft)	7100 K	M-QMQX0-71	180 lm/mod (270 lm/ft)	113 lm/W	Mods per bag: 38 (25.3 ft) Mods per case: 912 (608 ft)	PL-QM4-TW260-P
		5000 K	M-QMQX0-50				PL-QM4-NW260-P
		4100 K†	M-QMQX0-41				PL-QM4-MW260-P

* Check module for polarity.
 † Available in limited supply.



Specifications subject to change without notice.



QWIK MOD™ 12V ¹²VDC


12V LED channel letter illumination



Specifications

Qwik Mod Mini

Dimensions L × W × H	Qwik Mod Mini 1, ..0.55" × 0.35" × 0.35"
	Qwik Mod Mini 1 HD
	Qwik Mod Mini 2...1.02" × 0.35" × 0.35"
Beam angle	180° × 140° Low dome diamondback optic
Mounting options	Peel & Stick, silicone required (Peel & Stick for temporary placement only)
Operating temp	-25° C to +60° C
Environment	IP67
Spacing	Qwik Mod Mini 1 ...4.14 mods/ft
(fully-stretched)	Qwik Mod Mini 1 HD6.1 mods/ft
	Qwik Mod Mini 2...3.33 mods/ft
Wire color	WhitesWhite solid (+) / White/Black stripe (-)*
	Colors.....Gray, Red, Green, or Blue solid (+) / White/Black stripe (-)
Warranty	10-Year Product / 5-year Limited Labor

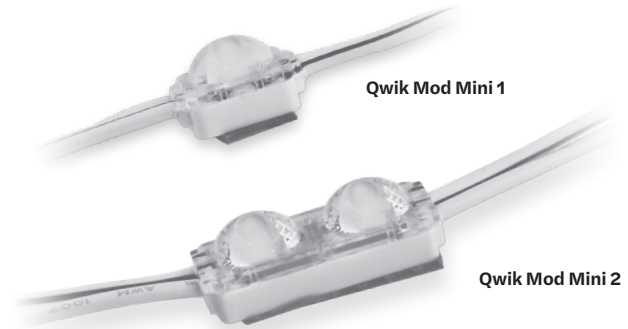

Product	Max. mods (series)	CCT/Wavelength	SKU	Power	Intensity	Efficacy	Packaging	UL number
Qwik Mod Mini 1	240 mods (58 ft)	7000 K	M-QMM10-70	0.24 W/mod (0.99 W/ft)	25 lm/mod (103.5 lm/ft)	104.2 lm/W	Mods per bag: 240 (58 ft) Mods per case: 4,800 (1,160 ft)	PL-MN1-QM70-P
		2700 K*	M-QMM10-27					PL-MN1-QM27-P
Qwik Mod Mini 1 HD	240 mods (39.34 ft)	7000 K	M-QMM1H-70	0.24 W/mod (1.46 W/ft)	25 lm/mod (152.5 lm/ft)	104.2 lm/W	Mods per bag: 240 (39.34 ft) Mods per case: 4,800 (786.89 ft)	PL-MN1-QM70-P (HD)
		5700 K*	M-QMM1H-57					PL-MN1-QM57-P (HD)
		5000 K*	M-QMM1H-50					PL-MN1-QM50-P (HD)
		4100 K*	M-QMM1H-41					PL-MN1-QM41-P (HD)
		3500 K*	M-QMM1H-35		3 lm/mod (18.3 lm/ft)	14.4 lm/W		PL-MN1-QM35-P (HD)
		3000 K*	M-QMM1H-30					PL-MN1-QM30-P (HD)
		2700 K*	M-QMM1H-27					PL-MN1-QM27-P (HD)
		Red (667 nm)	M-QMM1H-RD					PL-MN1-QMRD-P (HD)
		Green (508 nm)	M-QMM1H-GR		19 lm/mod (115.9 lm/ft)	73.5 lm/W		PL-MN1-QMGR-P (HD)
		Blue (453 nm)	M-QMM1H-BL		4 lm/mod (24.4 lm/ft)	9.56 lm/W		PL-MN1-QMBL-P (HD)
Qwik Mod Mini 2	120 mods (36 ft)	7000 K	M-QMM20-70	0.48 W/mod (1.60 W/ft)	50 lm/mod (166.5 lm/ft)	104.2 lm/W	Mods per bag: 120 (36 ft) Mods per case: 3,000 (900 ft)	PL-MN2-QM70-P
		Red (629 nm)	M-QMM20-RD		9.45 lm/mod (31.47 lm/ft)	20.68 lm/W		PL-MN2-QMRD-P
		Ruby Red (637 nm)	M-QMM20-RR		7.1 lm/mod (23.64 lm/ft)	15.72 lm/W		PL-MN2-QMRR-P
		Amber (593 nm)	M-QMM20-AM		8.9 lm/mod (29.64 lm/ft)	18.39 lm/W		PL-MN2-QMAM-P
		Red-Orange (616 nm)	M-QMM20-RO		15.321 lm/mod (51.02 lm/ft)	30.60 lm/W		PL-MN2-QMRO-P
		Orange (617 nm)	M-QMM20-OR		14.46 lm/mod (48.15 lm/ft)	29.54 lm/W		PL-MN2-QMOR-P
		Green (517 nm)	M-QMM20-GR		48.87 lm/mod (162.74 lm/ft)	84.28 lm/W		PL-MN2-QMGR-P
		Blue (462 nm)	M-QMM20-BL		9.5 lm/mod (31.64 lm/ft)	18.27 lm/W		PL-MN2-QMBL-P

* Available in limited supply.



Specifications subject to change without notice.



QWIK MOD™ 12V ¹²VDC

12V LED channel letter illumination



Recommended Coverage Chart (Channel Letters)

Qwik Mod

Model	Depth	Mods/ft	Single stroke width	Multi-row on-center spacing
Qwik Mod 1	2"	3	6"	4"
	3"		8"	7"
	4"	2.5	12"	9"
	5"			11"
Qwik Mod 2	3"	3	8"	7"
	4"	1.7	12"	12"
	5"		16"	13"
	6"		18"	14"
	3"	3	8"	7"
	4"	1.7	12"	12"
	5"		16"	13"
	3"	3	8"	7"
Qwik Mod 3	4"	1.5	13"	12"
	5"		16"	13"
	6"		18"	14"
	7"		22"	16"
	8"		24"	18"
	3"	2	8"	7"
	4"	1.5	13"	12"
	5"		16"	13"
	6"		18"	14"
	7"		20"	16"
	8"		22"	18"
Qwik Mod 4	3"	3	8"	7"
	4"	1.5	13"	12"
	5"		16"	13"
	6"		18"	14"
	7"		22"	16"
	8"		24"	18"

Product and depth may vary depending on face material and desired brightness.

All spacing guidelines in this chart were done using 7328 White Acrylic faces. Other materials, thicknesses, and color can affect these guidelines in your sign. To ensure accuracy, it is recommended that you test the product in your specific application in a dark setting prior to installation. If you have concerns or questions about the materials you are using for your application please contact us for assistance.

Qwik Mod Mini

Model	Depth	Max. stroke (single row)	Multi-row on-center spacing
Qwik Mod Mini 1	1"	2.5" at 7.5 mods/ft	1.5" at 7.5 mods/ft
	2"	4"	3"
Qwik Mod Mini 1 HD	1"	2.5" at 7.5 mods/ft	1.5" at 7.5 mods/ft
	2"	4"	3"
Qwik Mod Mini 2	1"	2.5" at 7.5 mods/ft	1.5" at 7.5 mods/ft
	2"	4"	3"
	3"	6"	5"

Power Supply Options

Qwik Mod

Product	60 W		20 W	
	Watts/Mod [‡]	Max. Mods	Watts/Mod [‡]	Max. Mods
Qwik Mod 1	0.4	150	0.42	47
Qwik Mod 2	0.8	76	0.84	23
Qwik Mod 3	1.2	50	1.26	15
Qwik Mod 4	1.6	38	1.68	11

[‡] Watts per mod may vary depending on run footage.



principalsloan.com
325.227.4577
3490 Venture Dr., San Angelo, TX 76905

© 2025 Principal Industries Rev C 2025-03-05

