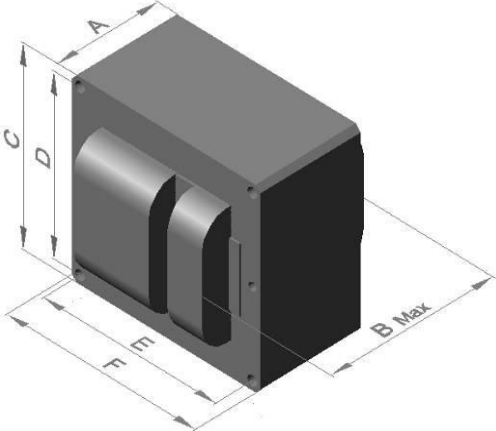
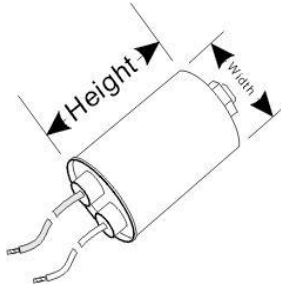



Input Volts (Volts)	120	208	240	277	480	4 1/4 x 4 3/4 CORE, CWA														
Line Current (Amps)																				
Nominal Operating	4.00	2.40	2.10	1.80	1.00															
Max. Open Circuit	3.40	1.95	1.70	1.48	0.85															
Regulation																				
Line Volts	±10%																			
Lamp Watts	±8%					<table border="1"> <tr> <td>A</td> <td>59</td> <td rowspan="6">mm</td> </tr> <tr> <td>B</td> <td>107</td> </tr> <tr> <td>C</td> <td>108</td> </tr> <tr> <td>D</td> <td>98</td> </tr> <tr> <td>E</td> <td>110</td> </tr> <tr> <td>F</td> <td>120</td> </tr> </table>		A	59	mm	B	107	C	108	D	98	E	110	F	120
A	59	mm																		
B	107																			
C	108																			
D	98																			
E	110																			
F	120																			
UL Temperature Ratings																				
Insulating Class	N																			
Coil Temperature Code	B	A	B	A	B															
Nominal Input Watts (W)	470																			
Nominal Open Circuit Voltage (Volts)	270																			
Power Factor	90%																			
Current Crest Factor	1.65																			
Input Voltage At Lamp Dropout (Volts)	96	166	192	222	384															
Min. Ambient Starting Temp.	-40°C																			
60Hz TEST PROCEDURES						Capacitor Model: HQCS-26														
High Potential Test (Volts)						Temp Rating	-40°C~105°C													
1 Minute	2000					Height	100 mm													
1 Second	2500					Width	55 mm													
Open Circuit Voltage Test (Volts)																				
Min.	243																			
Max.	311																			
Short Circuit Current Test (Amps)																				
Secondary Current Min	3.25																			
Max	4.88																			
Recommended Fuse (Amps)	12	7	6	5	3															
Weight (kG)																				
Lead Lengths (mm)	250~350																			
CAPACITOR Specifications																				
Microfarads (µF)	26																			
Volts (Min.) (Volts)	540					Ignitor Model: HQIG-3MCL	<table border="1"> <tr> <td>Temp Rating</td> <td>-40°C~105°C</td> </tr> <tr> <td>A: 65mm</td> <td>B: 10mm</td> </tr> <tr> <td>C: 32mm</td> <td>D: 29mm</td> </tr> </table>	Temp Rating	-40°C~105°C	A: 65mm	B: 10mm	C: 32mm	D: 29mm							
Temp Rating	-40°C~105°C																			
A: 65mm	B: 10mm																			
C: 32mm	D: 29mm																			
IGNITOR Specifications																				
Max. Input Voltage To Reference Ballast (Volts)	108	187	216	249	432															
Pulse Height Scope	3.0~4.0kV																			
Min. Pulse Width @2.70kV (µS)	1.80																			
