

MDF076

Wall Sconce



Features

Housing

Die-formed Cold-rolled Steel

Optical

Shade: High Transmission Glass Creates Excellent Light Distribution and Uniformity

LED: High Efficiency, High CRI, Binned and Mixed to Reach Uniform Light

Electrical

High Power Factor, Low THD

EM Model: Built-in Emergency Light and Bi-Level Lighting

Lamp

LED Type: Integrate LED Module , 3000K LED

More Color Temperature Option 3500K, 4000K, 5000K

GU24 Type: - CFL Bulb, 2700K or 4000K


- 9W LED Bulb, 3000K or 4000K

Certification

UL/cUL or ETL/cETL Listed, Suitable for Damp Locations

Warranty

5 Years Limited Warranty on Driver and LED

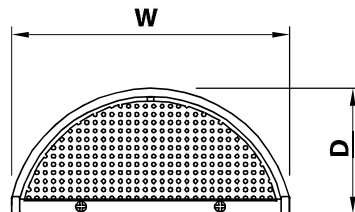

LED Type

| Model | Input Voltage | Input Wattage | LED CT/CRI | Lumen (TYP) | Finish/Shade | Dimension (W x H x D) | Energy Star |
|------------------|---------------|---------------|-------------|-------------|---------------------|-----------------------|-------------|
| MDF076D-xxxxK | 120V | 15W | 3000K / >80 | 1250 | ORB / Frosted Glass | 8.0" x 14.0" x 3.6" | Yes |
| MDF076D-EM-xxxxK | 120V | 15W | 3000K / >80 | 1250 | ORB / Frosted Glass | 8.0" x 14.4" x 3.8" | Yes |

GU24 Type

| Model | Input Voltage | Lamp | Finish | Shade | Dimension (W x H x D) | Energy Star |
|--------------|---------------|--------------|--------|---------------|-----------------------|-------------|
| MDF076PG-223 | 120V | 2 x 23W GU24 | ORB | Frosted Glass | 8.0" x 14.0" x 3.6" | --- |