

## MH 150W/C/U/EM

### GENERAL Characteristics

Lamp Type	Standard MH Single Ended
ANSI Code	M107/E (M57/E Comp.)
Bulb Shape	ED17
Base Type	Medium (E26)
Bulb Finish	Coated
Rated Life	10000 hours
Operating Position	Universal
Dimming	50% Rated Power

### PHOTOMETRIC

Initial Lumens	12800
Scotopic Lumens (S/P 1.7)	21800
Lumens Per Watt	85
Lamp Lumen Depreciation (LLD)	.65 (65%) @ 4000 hours
Correlated Color Temperature	3700K
Chromaticity Coordinates (CIE-x,y)	.395 .390
Color Rendering Index (CRI) or (Ra)	70

### PHYSICAL

Bulb Diameter	2.1" (54mm)
Max. Overall Length (MOL)	5.4" (138mm)
Light Center Length (LCL)	3.4" (86mm)
Effective Arc Length	N/A
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	400
Socket Pulse Rating (KV)	-
Luminaire Type	Enclosed Rated

### ELECTRICAL

Lamp Watts	150
Lamp Oper. Voltage (Nom.)	110
Energy Saving Replacement for	175W Probe Start MH
Watts Saved	25

### SUSTAINABILITY

Recycling Program	Smartpac® 800-451-2606
-------------------	------------------------

### NOTES


Lamp performance ratings published in this data sheet are based on operation with magnetic ballasts. Performance ratings of Universal lamps are based upon vertical ( $\pm 15^\circ$ ) operation. Dimming applicable only when lamp is installed in the Base Up  $\pm 15^\circ$  (BU $\pm 15^\circ$ ) position. To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio.

## Energy Master®

Energy Saving  
Probe Start  
Metal Halide  
Retrofit Lamps


Change Just the  
Lamp and Save

As Simple as a  
Change of a Lamp




Universal  
Any Position

ED17




Dia. = 2.1" (54mm)  
MOL = 5.4" (138mm)  
LCL = 3.4" (86mm)  
Base = Medium (E26)

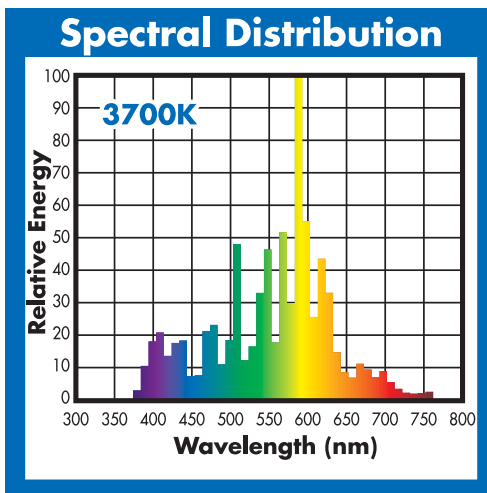

### Change Just the Lamp:

- No need to change luminaires or ballasts
- Save on energy consumption
- Safe alternative - Open-rated lamps available in 360 watt standard probe start metal halide lamps
- Indoor or outdoor, Energy Master lamps are perfect for energy savings in any application

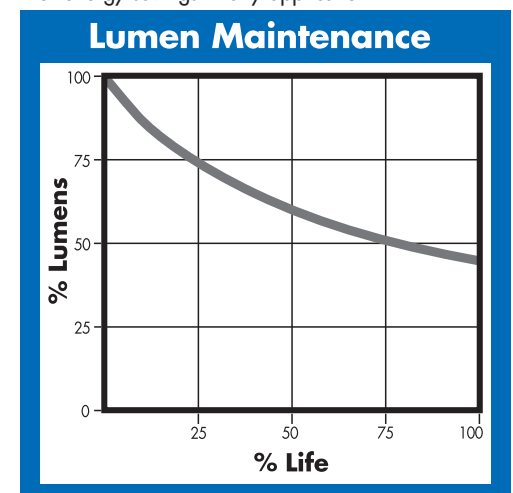

Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

This Product is Recyclable Through  Smartpac  
THE RECYCLING EXPERT