



MSD

MSD 150/2. 1CT/4

These single ended, compact lamps enable optimal light collection and accurate beam control, while they also provide true daylight color temperatures – all to create great stage brightness and vivid entertainment. And since they offer long lifetime usage they help minimize the cost of ownership via fewer lamp replacements and fewer maintenance man hour costs.

Product data


General Information	
Cap-Base	G12 [G12]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life To 50% Failures (Nom)	3000 h
System Description	-
Light Technical	
Color Code	2
Luminous Flux (Min)	9000 lm
Luminous Flux (Nom)	10500 lm
Chromaticity Coordinate X (Nom)	287
Chromaticity Coordinate Y (Nom)	301
Correlated Color Temperature (Nom)	8500 K
Luminous Efficacy (rated) (Nom)	70 lm/W
Color Rendering Index (Nom)	62
Operating and Electrical	
Power (Rated) (Nom)	150 W
Lamp Current (Nom)	1.85 A

Ignition Supply Voltage (Min)	198 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	-
Luminaire Design Requirements	
Bulb Temperature (Max)	650 °C
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	871869641598600
Order product name	MSD 150/2. 1CT/4
EAN/UPC - Product	8718696415986
Order code	928172805115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928172805115
Net Weight (Piece)	18.000 g

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




MSD 150/2

Product	D (max)	O	L (min)	L (max)	L	C (max)
MSD 150/2. 1CT/4	20 mm	5.0 mm	55 mm	57 mm	56 mm	110 mm

Photometric data

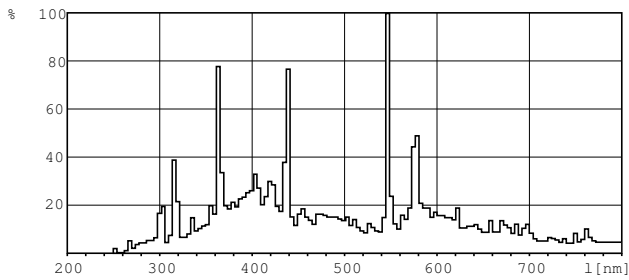

MSD

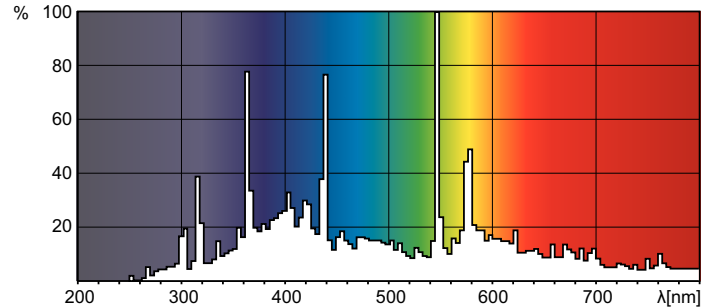

MSD

