



# MSR Short Arc

## MSR 2000 SA 1CT/8

The lamp's short arc and compact design helps enable a compact luminaire that provides high beam intensity, while the excellent color rendition characteristics help ensure optimal colors on stage. The highly innovative P3 technology, developed by Philips, allows MSR Short Arc lamps to be used at higher temperatures in any burning position. The result? Longer lifetime, fewer early failures and a highly consistent performance throughout the lamp's lifetime.

### Product data


General Information	
Cap-Base	GY22 [ GY22]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Main Application	Studio/Disco
Life to 50% Failures (Nom)	750 h
System Description	Short Arc
Light Technical	
Color Code	- [ Not Specified]
Luminous Flux (Min)	164000 lm
Luminous Flux (Nom)	174000 lm
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	334
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	88 lm/W
Color Rendering Index (Nom)	89
Operating and Electrical	
Power (Nom)	2000 W
Lamp Current (Nom)	21.5 A

Ignition Supply Voltage (Min)	207 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	-
Luminaire Design Requirements	
Bulb Temperature (Max)	1000 °C
Pinch Temperature (Max)	500 °C
Product Data	
Full product code	872790091573000
Order product name	MSR 2000 SA 1CT/8
EAN/UPC - Product	8727900915730
Order code	928173205114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928173205114
Net Weight (Piece)	0.096 kg

# MSR Short Arc

## Warnings and Safety



### Dimensional drawing



MSR 2000 SA

Product
MSR 2000 SA 1CT/8

### Photometric data

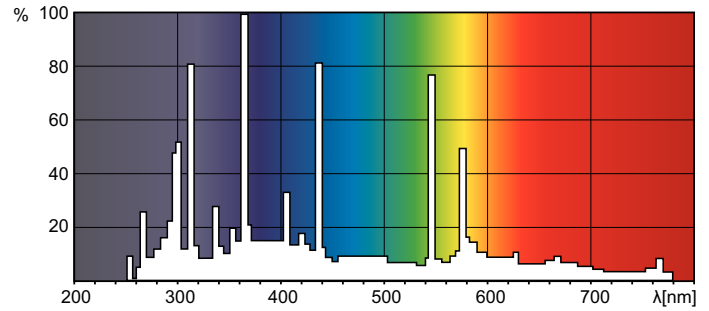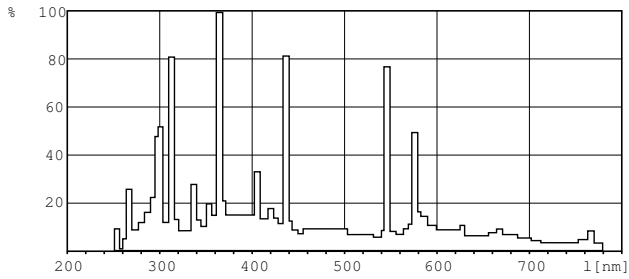

XDPB\_XDMSR\_SA-Spectral power distribution B/W

