

## DESCRIPTION

The Night Falcon™ high wattage LED floodlight luminaire combines high-efficiency, precision engineered optics and energy efficiency in a cost-effective solution. Incorporating an innovative thermal management design into the fixture, that maximizes heat dissipation, results in longer fixture and LED life. The rugged, die-cast housing is IP66 and 3G vibration rated for exceptional durability and long term reliability. The Night Falcon luminaire is ideal floodlight for many area outdoor lighting situations, including parking lots, construction and storage sites, rail yards, light industrial locations, and service areas.

## SPECIFICATION FEATURES

### Construction

Heavy-duty, die cast aluminum housing, driver compartment and driver housing door. A separate driver compartment and external fins provide optimal thermal management that result in longer LED and driver life. The housing, driver compartment and optical chamber are IP66 rated. Access to the driver for maintenance is achieved with a removable driver door using pan head screws. A one-piece silicone gasket seals the door to the fixture housing. The fixture is 3G vibration rated (ANSI C136.31) to ensure durability in area and site lighting applications.

### Optics

The LED chamber(s) incorporate a vacuum metalized reflector that provides high-efficiency illumination. Optics are precisely designed to shape the the NEMA 6H x 6V wide distribution and the 3H x 3V spot distribution, maximizing efficiency and application spacing. Clear glass tempered lens with full circumference form-in-place silicone gasket protects the optics from damage. Offered standard in 4000K (+/- 275K) CCT and minimum 70 CRI. Optional 3000K, 5000K and 5700K CCT.

### Electrical

LED drivers are mounted to the removable die-cast aluminum doors for optimal heat sinking and ease of maintenance. 120-277V 50/60Hz, 347V 60Hz or 480V 60Hz operation. Integral 6kV surge is standard. 10kV/10kA common- and differential- mode surge protection available as an option. 0-10V dimming driver is available to accommodate controls capability such as dimming and occupancy. Standard NEMA 3-PIN twistlock photocontrol receptacle and NEMA 7-PIN twistlock photocontrol receptacles are available as options. Suitable for ambient temperatures from -40°C to 40°C. 90% lumen maintenance greater than 50,000 hours per IESNA TM-21 at 25°C.

### Accessories

Heavy-duty steel top and side visors control glare and spill light. 1/8" thick UV stabilized vandal guard shields glass lens from impact when mounted at low levels. Easy to install wire guard features a heavy-gauge welded construction with corrosion resistant polyester powder coat finish to protect glass from projected objects.

### Mounting

Mounting options include an integral die-cast aluminum slipfitter that fits 2-3/8" - 3" O.D. tenon. The trunnion mounting includes a 1/4" polyester powder coated galvanized steel trunnion with a 14/3 SOW cord. The trunnion mount uses an interlocking slide adjustment that is locked into place with a set screw.

### Finish

Housing and cast parts finished in five-stage super TGIC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Standard color is carbon bronze. Additional colors available in summit white, white, grey, bronze, black, dark platinum and graphite metallic. Consult your lighting representative at Eaton for a complete selection of standard colors.

### Warranty

Five-year warranty.




## NFFLD-L NIGHT FALCON LARGE

Solid State LED


FLOODLIGHT

## DIMENSIONS

### Slipfitter Mount

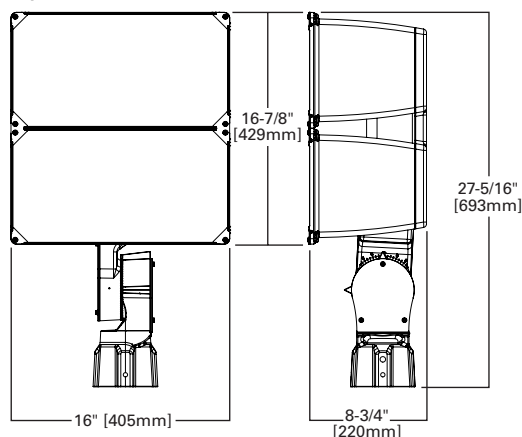

### Trunnion Mount

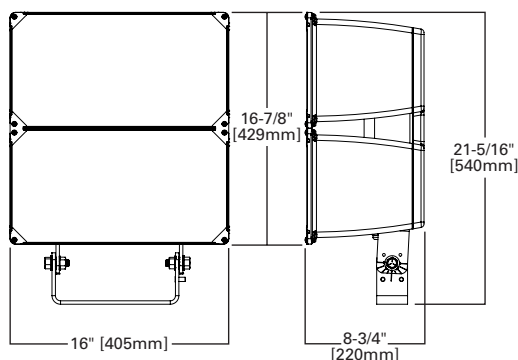

### CERTIFICATION DATA

DesignLights Consortium® Qualified\*  
UL/cUL Wet Location Listed  
IP66 Fixture and Optical Chamber  
LM79/LM80 Compliant  
3G Vibration Rated  
RoHS Compliant

### ENERGY DATA

**Electronic LED Driver**  
> 0.9 Power Factor  
< 20% Total Harmonic Distortion  
120V 50/60Hz, 347V/60Hz and 480V/60Hz  
-40°C Minimum Ambient Temperature  
Rating  
+40°C Maximum Ambient Temperature  
Rating

### EPA

Effective Projected Area (Sq. Ft.): 2.5

### SHIPPING DATA

Approximate Net Weight:  
48 lbs. (22 kgs.)  
55 lbs. (25 kgs.) - with Yoke

## POWER AND LUMENS

|                             | 6x6          |                   |                   |                   | 3x3          |                   |                   |                   |
|-----------------------------|--------------|-------------------|-------------------|-------------------|--------------|-------------------|-------------------|-------------------|
| C75 LED                     | NFFLD-L-C75  | NFFLD-L-C75-7030  | NFFLD-L-C75-7050  | NFFLD-L-C75-7060  | NFFLD-L-C75  | NFFLD-L-C75-7030  | NFFLD-L-C75-7050  | NFFLD-L-C75-7060  |
| Delivered Lumens            | 25,444       | 24,459            | 25,088            | 24,689            | 24,193       | 23,257            | 23,855            | 23,466            |
| CCT (Kelvin)                | 4000K        | 3000K             | 5000K             | 6000K             | 4000K        | 3000K             | 5000K             | 6000K             |
| CRI (Color Rendering Index) | 70           | 70                | 70                | 70                | 70           | 70                | 70                | 70                |
| Power Consumption (Watts)   | 179W         | 179W              | 179W              | 179W              | 236W         | 236W              | 236W              | 236W              |
| C100 LED                    | NFFLD-L-C100 | NFFLD-L-C100-7030 | NFFLD-L-C100-7050 | NFFLD-L-C100-7060 | NFFLD-L-C100 | NFFLD-L-C100-7030 | NFFLD-L-C100-7050 | NFFLD-L-C100-7060 |
| Delivered Lumens            | 33,289       | 32,001            | 32,823            | 32,301            | 28,739       | 27,627            | 28,337            | 27,886            |
| CCT (Kelvin)                | 4000K        | 3000K             | 5000K             | 6000K             | 4000K        | 3000K             | 5000K             | 6000K             |
| CRI (Color Rendering Index) | 70           | 70                | 70                | 70                | 70           | 70                | 70                | 70                |
| Power Consumption (Watts)   | 252W         | 252W              | 252W              | 252W              | 284W         | 284W              | 284W              | 284W              |
| C125 LED                    | NFFLD-L-C125 | NFFLD-L-C125-7030 | NFFLD-L-C125-7050 | NFFLD-L-C125-7060 |              |                   |                   |                   |
| Delivered Lumens            | 37,481       | 36,474            | 37,859            | 36,357            |              |                   |                   |                   |
| CCT (Kelvin)                | 4000K        | 3000K             | 5000K             | 6000K             |              |                   |                   |                   |
| CRI (Color Rendering Index) | 70           | 70                | 70                | 70                |              |                   |                   |                   |
| Power Consumption (Watts)   | 268W         | 268W              | 268W              | 268W              |              |                   |                   |                   |
| C150 LED                    | NFFLD-L-C150 | NFFLD-L-C150-7030 | NFFLD-L-C150-7050 | NFFLD-L-C150-7060 |              |                   |                   |                   |
| Delivered Lumens            | 42,271       | 41,134            | 42,697            | 41,002            |              |                   |                   |                   |
| CCT (Kelvin)                | 4000K        | 3000K             | 5000K             | 6000K             |              |                   |                   |                   |
| CRI (Color Rendering Index) | 70           | 70                | 70                | 70                |              |                   |                   |                   |
| Power Consumption (Watts)   | 316W         | 316W              | 316W              | 316W              |              |                   |                   |                   |
| C175 LED                    | NFFLD-L-C175 | NFFLD-L-C175-7030 | NFFLD-L-C175-7050 | NFFLD-L-C175-7060 |              |                   |                   |                   |
| Delivered Lumens            | 47,106       | 45,840            | 47,581            | 45,693            |              |                   |                   |                   |
| CCT (Kelvin)                | 4000K        | 3000K             | 5000K             | 6000K             |              |                   |                   |                   |
| CRI (Color Rendering Index) | 70           | 70                | 70                | 70                |              |                   |                   |                   |
| Power Consumption (Watts)   | 371W         | 371W              | 371W              | 371W              |              |                   |                   |                   |

## CURRENT DRAW

| Voltage (V) | 6x6         |              |              |              |              | 3x3         |              |
|-------------|-------------|--------------|--------------|--------------|--------------|-------------|--------------|
|             | NFFLD-L-C75 | NFFLD-L-C100 | NFFLD-L-C125 | NFFLD-L-C150 | NFFLD-L-C175 | NFFLD-L-C75 | NFFLD-L-C100 |
|             | Current (A) | Current (A)  | Current (A)  | Current (A)  | Current (A)  | Current (A) | Current (A)  |
| 120V        | 1.499       | 2.141        | 2.279        | 2.688        | 3.155        | 2.008       | 2.391        |
| 277V        | 0.661       | 0.923        | 0.991        | 1.155        | 1.341        | 0.859       | 1.039        |
| 347V        | 0.539       | 0.760        | 0.784        | 0.924        | 1.082        | 0.692       | 0.841        |
| 480V        | 0.398       | 0.548        | 0.565        | 0.666        | 0.772        | 0.509       | 0.639        |

## LUMEN MAINTENANCE


| Ambient Temperature | TM-21 Lumen Maintenance (50,000 Hours) | Theoretical L70 (Hours) |
|---------------------|----------------------------------------|-------------------------|
| 25°C                | 90.3%                                  | >164,000                |
| 40°C                | 88.9%                                  | >158,000                |

## LUMEN MULTIPLIER


| Ambient Temperature | Lumen Multiplier |
|---------------------|------------------|
| 10°C                | 1.03             |
| 15°C                | 1.02             |
| 25°C                | 1.00             |
| 40°C                | 0.97             |

## DIMENSIONS


### Yoke Mount

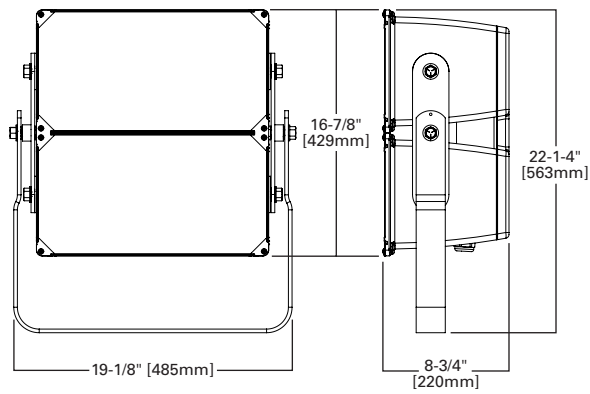

### TRUNNION MOUNT DRILL PATTERN

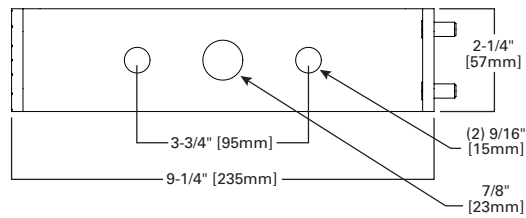


### YOKE MOUNT DRILL PATTERN

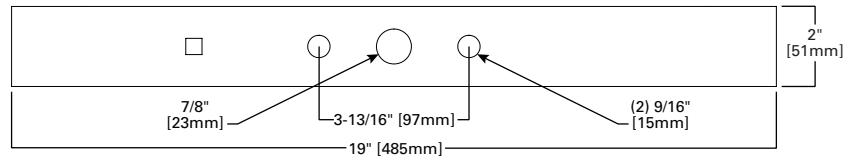


## ACCESSORIES


### Top and Side Visors

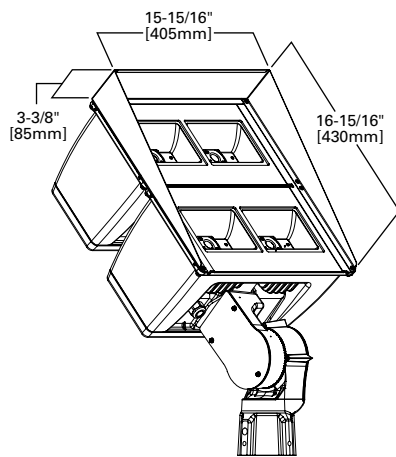

### Wire Guard

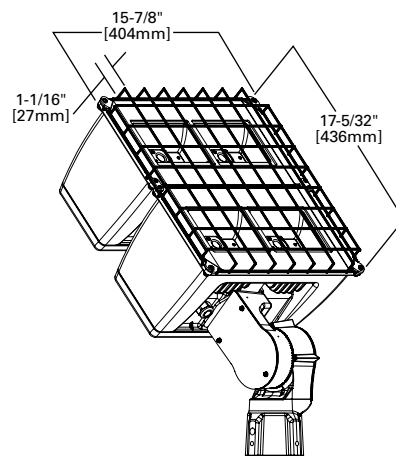

### Vandal Shield

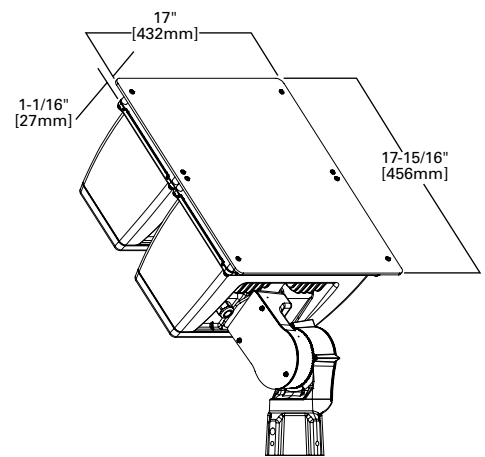

**CONTROL OPTIONS****0-10V (D)**

This fixture is offered with 0-10V dimming driver(s). The D option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

**Photocontrol (PER and PER7)**

Photocontrol receptacles (PER and PER7) provide a flexible solution to enable “dusk-to-dawn” lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PER7 receptacle.

**WaveLinx Wireless Outdoor Lighting Control Module (WOLC-7P-10A)**

The 7-pin wireless outdoor lighting control module enables WaveLinx to control outdoor area, site and flood lighting. WaveLinx controls outdoor lighting using schedules to provide ON, OFF and dimming controls based on astronomic or time schedules based on a 7 day week.

**ORDERING INFORMATION**

Sample Number: NFFLD-L-C100-D-UNV-66-S-CB-PER

| Product Family <sup>1,2</sup>                                                                                                                                                                                                                                                                                                   | Light Engine <sup>3</sup>                                                                                                                                                                 | Driver <sup>4</sup>       | Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Distribution                                                              | Mounting                                                                  | Color                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NFFLD-L</b> =Night Falcon Large<br><b>BAA-NFFLD-L</b> =Night Falcon Large, Buy American Act Compliant <sup>13</sup><br><b>TAA-NFFLD-L</b> =Night Falcon Large, Trade Agreements Act Compliant <sup>13</sup>                                                                                                                  | <b>C100</b> =33,900 Nominal Lumens<br><b>C75</b> =25,900 Nominal Lumens<br><b>C125</b> =38,000 Nominal Lumens<br><b>C150</b> =43,000 Nominal Lumens<br><b>C175</b> =48,000 Nominal Lumens | <b>D</b> =Dimming (0-10V) | <b>UNV</b> =120-277V<br><b>347</b> =347V<br><b>480</b> =480V <sup>5</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>66</b> =NEMA 6H x 6V Wide<br><b>33</b> =NEMA 3H x 3V Spot <sup>6</sup> | <b>S</b> =Slipfitter <sup>7</sup><br><b>T</b> =Trunnion<br><b>Y</b> =Yoke | <b>CB</b> =Carbon Bronze (Standard)<br><b>BK</b> =Black<br><b>BZ</b> =Bronze<br><b>AP</b> =Grey<br><b>WH</b> =White<br><b>WHT</b> =Summit White<br><b>DP</b> =Dark Platinum<br><b>GM</b> =Graphite Metallic |
| <b>Options (Add as Suffix)</b>                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                           |                           | <b>Accessories (Order Separately) <sup>10,14</sup></b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                           |                                                                           |                                                                                                                                                                                                             |
| <b>7030</b> =70 CRI / 3000K <sup>8</sup><br><b>7050</b> =70 CRI / 5000K <sup>8</sup><br><b>7060</b> =70 CRI / 5700K <sup>8</sup><br><b>PER</b> =NEMA 3-PIN Twistlock Photocontrol Receptacle<br><b>PER7</b> =NEMA 7-PIN Twistlock Photocontrol Receptacle <sup>9</sup><br><b>10K</b> =10kV/10kA UL 1449 Surge Protective Device |                                                                                                                                                                                           |                           | <b>FA63</b> =3" O.D. Surface Mount Bracket<br><b>RAB-X</b> =Right Angle Bracket for Slipfitter<br><b>SAB-X</b> =Steel Angle Bracket for Trunnion<br><b>TYS-XX</b> =Slipfitter Adapter for 2-3/8", 3" or 3-1/2" O.D. Tenon<br><b>OA1223</b> =10kV/10kA UL 1449 Surge Protective Device Replacement<br><b>OA/RA1013</b> =Photocontrol Shorting Cap<br><b>OA/RA1014</b> =NEMA Photocontrol - 120V<br><b>OA/RA1016</b> =NEMA Photocontrol - Multi-Tap<br><b>OA/RA1027</b> =NEMA Photocontrol - 480V<br><b>OA/RA1201</b> =NEMA Photocontrol - 347V<br><b>TS2HW/NFFLD-XX</b> =Top and Side Visors <sup>11</sup><br><b>VSHW/NFFLD</b> =Vandal Shield <sup>11</sup><br><b>WGHW/NFFLD</b> =Wire Guard <sup>11</sup><br><b>WOLC-7P-10A</b> =WaveLinx Outdoor Control Module (7-pin) <sup>12</sup> |                                                                           |                                                                           |                                                                                                                                                                                                             |

- NOTES:**
- DesignLights Consortium® Qualified. Refer to [www.designlights.org](http://www.designlights.org) Qualified Products List under Family Models for details.
  - Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to our pole white paper WP513001EN for additional support information.
  - Standard 4000K CCT and minimum 70 CRI. Consult IES file for actual lumen output.
  - Consult factory for driver surge protection values.
  - Only for use with 480V Wye systems. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems).
  - Only available in C75 and C100 light engines.
  - Fits 2-3/8" to 3" O.D. tenon, wire leads run through slipfitter.
  - Extended lead times apply. Use dedicated IES files for 3000K, 5000K and 5700K when performing layouts. These files are published on the Night Falcon large luminaire product page on the website.
  - Must order with dimming driver.
  - Replace XX with paint color.
  - Cannot combine TS2HW/NFFLD (Top and Side Visor), VSHW/NFFLD (Vandal Shield), or WGHW/NFFLD (Wire Guard), limited to one external guard per fixture.
  - Requires 7-pin NEMA twistlock photocontrol receptacle and Universal (120-277V) voltage operation. The WOLC-7 cannot be used in conjunction with additional sensors or controls.
  - Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.
  - Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.

**STOCK ORDERING INFORMATION**

Stock Sample Number: NFFLD-L-C100-S

| Series                                                                                                                                                                                                       | Light Engine                                                            | Mounting                                   | Voltage                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------|----------------------------------------------|
| <b>NFFLD-L</b> =Night Falcon Large<br><b>BAA-NFFLD-L</b> =Night Falcon Large, Buy American Act Compliant <sup>2</sup><br><b>TAA-NFFLD-L</b> =Night Falcon Large, Trade Agreements Act Compliant <sup>2</sup> | <b>C100</b> =33,900 Nominal Lumens<br><b>C75</b> =25,900 Nominal Lumens | <b>S</b> =Slipfitter<br><b>T</b> =Trunnion | <b>[BLANK]</b> =120-277V<br><b>347</b> =347V |

**NOTES:** 1) Options not available with stock products. Order accessories as separate items for field installation. Refer to standard ordering information to add options. Refer to In-Stock Guide for availability. Stock fixture is 4000K, 6x6 distribution, non-dimming, 120-277V or 347V, carbon bronze only. 2) Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analyzed under domestic preference requirements.