


NU4

4" Round Downlight Stud

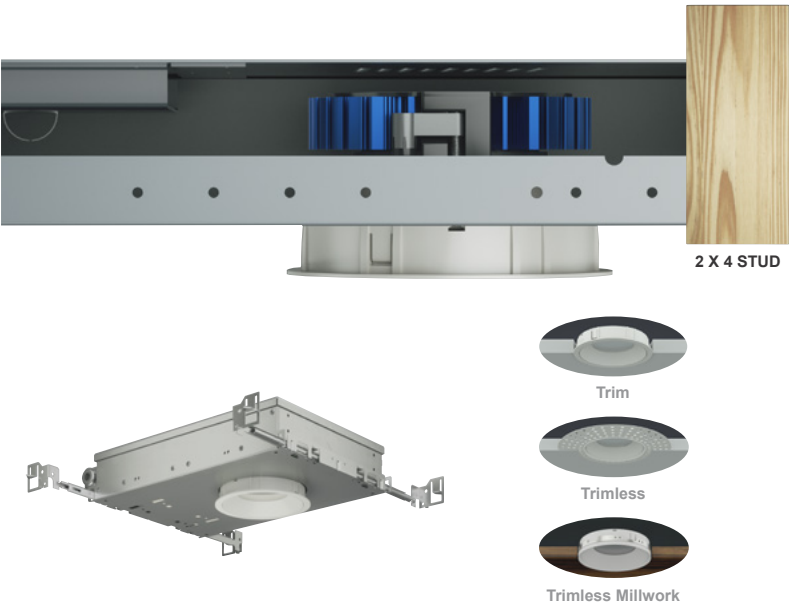

DESCRIPTION

NU STUD is offered in 4" round or square as trimless or as micro-trim install. It is a mere 2-1/4" above the ceiling with an IC enclosure box and a 5/8" standard ceiling thickness (housing height is adjustable for ceiling thickness). With a generous 1" regress bezel trim and microstructure lens, STUD is aesthetically pleasing with trim color options. 5 year fixture warranty.

HOUSING

Electrocoated 20-gauge cold-rolled steel provides enhanced structural reinforcement and rust prevention. Superior, UL-certified, injection-molded commercial-grade Lexan™ (PC) is used for the frame and regressed bezel trim. Lexan provides unmatched durability and impact resistance, and is tested for UV resistance and water exposure in outdoor applications. The thermally-advanced, anodized heat sink uses 6063 aluminum alloy.

MOUNTING

An advanced mounting system allows for quick and secure installation with LED and driver serviceability from below the ceiling. The LED assembly uses die-cast aluminum mounting clamp grips (MCG) that swing out to tighten onto variable ceiling thicknesses. Integrated rubber feet on each MCG provide a non-slip vibration-resistant installation. The hidden MCG system is accessible from below ceiling by removing the snap-in lens/ bezel assembly with either the included suction cup or a screwdriver blade. Integrated bar hangers feature integral toothed nails, T-bar mounting slots with locking holes, tabs for joist positioning. No risk damaging LED or bezel assembly during installation, these are installed during last steps. Fixture and driver are easily removed for servicing after install without damaging drywall.

MOUNTING DIMENSIONS	CEILING THICKNESS	CEILING CUTOUT
Trim	5/8" to 1-1/4"	4-3/8" diameter
Trimless	5/8" to 1-1/4"	4-1/2" diameter
Millwork (Trimless)	5/8" to 1-1/4"	4-3/8" diameter

Bar Hangers (included)	Mounting Length: 14-3/4" to 26"
Extension Kit p/n: K20266 (ordered separately, 1 per fixture)	Extends a pair of Bar Hangers Total Mounting Length: 29" to 48"

LISTINGS

- ETLus Listed to UL1598, cETL Listed to CSA C22.2 #250.0
- IP65 with lens - Suitable for wet locations with lens
- Non-conductive, Lexan dead-front construction
- **Declare.** - LBC Red List Approved

RATINGS / CERTIFICATIONS	STD	IC	ICAT	CP
Type non-IC	✓			
Type IC		✓	✓	✓
Chicago Plenum (CCEA)				✓
Suitable for air handling plenums			✓	✓
Reduced airflow (with lens) ASTM E283	✓	✓	✓	✓

LED INFO

- Standard COB (Nichia 219C):
- 80/90 CRI: SDCM = 2-step MacAdam Ellipse, Lumen Maintenance: L₇₀ > 50,000 hrs

PROJECT INFORMATION					
JOB NAME				TYPE	
ORDERING CODE					

ORDERING CODE					
SERIES	NU4				
TYPE	RDSTUD RDTSTUD RDTSTUDMW	round downlight round downlight trimless round downlight trimless millwork			
LED	SW	standard white (Nichia 219C LED)			
DELIVERED LUMENS	07LM 10LM 13LM 15LM 20LM ¹	528 lm 766 lm 971 lm 1121 lm 1496 lm	Standard Configuration: 3000K 80CRI		
	27K 30K 35K 40K	2700K 3000K 3500K 4000K	CCT	2700K	3000K
CRI	80 90	80 CRI 90 CRI	CRI	80+	90+
			CCT MULTIPLIER FOR LUMEN OUTPUT	0.96	0.81
REFLECTOR	GH85	85° glare control high efficiency diffused lens			
VOLTAGE	120 277 UNV	120V 277V 120V-277V			
DIMMING	DIM10 DIM10Z DALI DALIZ DMXZ ELV ²	eldoLED flicker free 0-10V dimming to 1% eldoLED flicker free 0-10V dimming to 0% eldoLED flicker free DALI dimming to 1% eldoLED flicker free DALI dimming to 0% DMX dim to zero leading & trailing edge dimming (Triac/ELV)			
MOUNTING OPTIONS	STD IC ³ ICAT ³ CP	standard non-IC housing insulation contact housing insulation contact/airtight housing chicago plenum housing			
TRIM COLOR	BK WH MC BZ WT	black white matte chrome bronze wheat	Not applicable to trimless option. Do not include in trimless ordering code.		
BEZEL COLOR	BK WH MC BZ WT	black white matte chrome bronze wheat			

ORDERING CODE

Follow the steps to specify your fixture, example:
NU4 - RDSTUD - SW - 10LM - 35K - 90 - GH85 - 120 - DIM10 - STD - WH - BK

SW (LED)	POWER
DELIVERED LM	W (80/90 CRI)
528	9
766	12
971	16
1121	19
1496	26

NOTES

1. 20LM available in 120V and 277V only.
2. Triac/ELV dimmable to < 1%, available in 120V only.
3. IC/ICAT not available in 15LM/20LM.

* EdoLED and DMX driver uses logarithmic dimming curve as standard. For linear dimming curve add "LIN" after dimming code, i.e. DIM10LIN.

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			





MOUNTING OPTIONS

STD - STANDARD NON-IC HOUSING
IC - INSULATION CONTACT

- STD & IC meet ASTM E283 Air-Tight Requirements.
- IC available for 07LM, 10LM, and 13LM Lumen options.

ICAT - INSULATION CONTACT/AIR TIGHT
CP - CHICAGO PLENUM

- ICAT & CP are suitable for active air handling plenums, and meet ASTM E283 Air-Tight Requirements.
- CP meets City of Chicago Environmental Air Requirements.
- ICAT not available in 20LM Lumen option.
- CP available for all Lumen options.

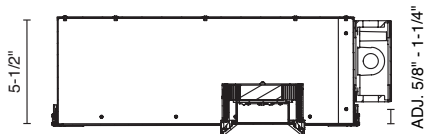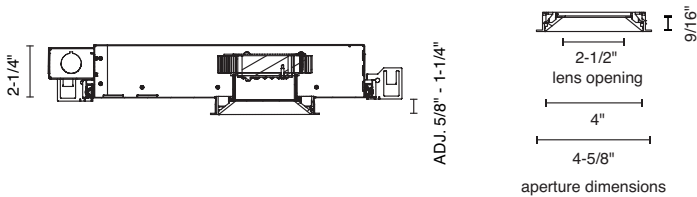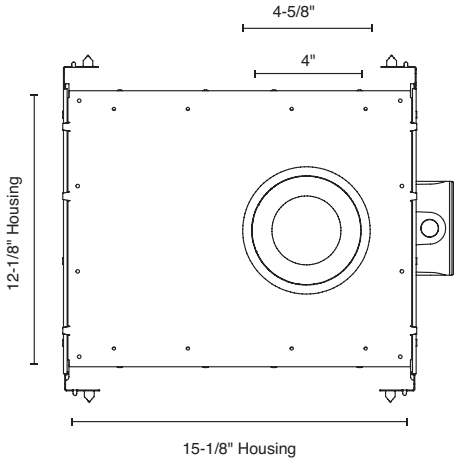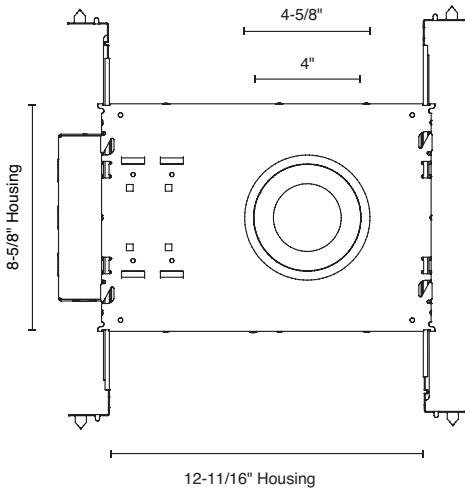

TRIMLESS OPTION



1. Fasten mud frame to ceiling.



2. Insert protective cover (included).
Apply joint compound over the mud frame.



3. Install LED assembly.




4. Install bezel.

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS (CONTINUED)

RDTSTUDMW – MILLWORK TRIMLESS



Millwork Mounting Bracket

- NOTES**
- 1 Ceiling cutout 4-3/8".
 - 2 Millwork Mounting Bracket & Mounting Screws are included with each Luminaire.
 - 3 One Plastic Spacer and two C-Clamps are included with each order.
 - 4 Refer to Installation Instructions for further details.



1. Insert Millwork Mounting Bracket using the included Plastic Spacer for proper depth positioning.



2. Use the included C-Clamps to temporarily hold the Plastic Spacer in position. Fasten the included wood screws into the Mounting Bracket using a right-angle impact driver (supplied by others).



3. Remove Plastic Spacer.



4. Install Luminaire.



5. Insert Bezel to finish the installation.

