





HALOSTAR® 24 V

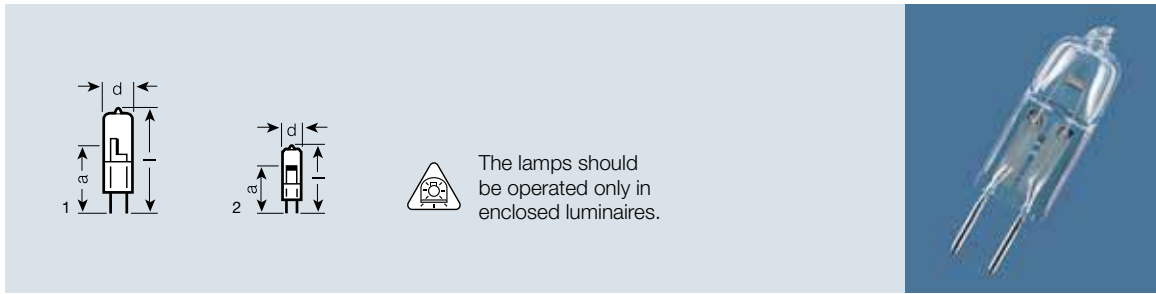

Product reference	Product number	W	V	lm	t [h]		d_{max} [mm]	l_{max} [mm]	a [mm]		No.	
HALOSTAR® 24 V series												
64435 U AX	4050300335513	20	24	320	1000	G4	9,5	33	22	40	2	
64445 U AX	4050300335544	50	24	900	2000	GY6.35	12	44	30	40	1	
64460 U AX	4050300335667	100	24	2200	2000	GY6.35	12	44	30	40	1	
64465 U AX	4050300335698	150	24	3200	2000	GY6.35	16	50	32	40	1	

HALOSTAR® 24 V

UV-reducing quartz suppresses unwanted UV radiation. The UV-related bleaching effect as defined by IEC has therefore been reduced by up to 80% compared with conventional pin-base lamps. Complies with the strictest UV protection thresholds (IEC 60432).

- The base pins are tempered to protect against corrosion
- The axial filament ensures optimum directional light
- High illuminance level

1) Average life at room temperature
These values may be lower at higher ambient temperatures