SunLight2®
INSPIRED BY NATURE

SunLight2 PAR20 LED Bulb

Single CCT 120V Bulb



Input Voltage	120V AC
Wattage	10W
Nominal Lumens	760 lm
CCT	2700K/3000K
CRI/R9	97+, 95+
Color Fidelity (Rf), Gamut (Rg)	94, 100
Percent Flicker	<20%
Dimming	Phase Dimmable
Dimming Range	100% - <0.7%
Beam Angles	15°, 24°, 36°

SunLight2 is an Architectural-Grade LED bulb optimized for an eye healthy lighting experience and no flicker. Its high CRI, full spectrum light provides exceptional color accuracy using patented LED technology.

FEATURES

- Direct replacement for halogen bulbs
- E26 base
- High CRI 97+, R9 95+, TLCI˜95
- Zero ultraviolet emission, won't fade colors
- Beam angles 15°, 24°, 36°
- No flicker
- 3 years / 25k hours warranty

APPLICATIONS

- Retail, Office and Commercial lighting
- Color-critical task lighting (apparel, groceries, hard goods & toys)
- Track lighting
- Down light (new & retrofit)
- Desk lamps
- Pendants
- Indoor & Outdoor

MODEL SPECIFICATIONS


Single CCT (2700K)						
MODEL NUMBER	Watts	Input Voltage	CCT	LUMENS	BEAM ANGLE	*CASE FINISHES
PAR20A10W27K15*	10W	120V AC	2700K	760 lm	15°	B(Black), W(White), S(Silver)
PAR20A10W27K24*	10W		2700K	760 lm	24°	
PAR20A10W27K36*	10W		2700K	760 lm	36°	

Custom Finishes Available


P: +1 (224) 654-6376 F: (773) 337-5628 E: sales@sunlight2.us
11966 Oak Creek Pkwy. Unit P, Huntley, IL 60142 U.S.A. |
©SunLight2, All Rights Reserved.

Single CCT (3000K)						
MODEL NUMBER	Watts	Input Voltage	CCT	LUMENS	BEAM ANGLE	*CASE FINISHES
PAR20A10W30K15*	10W	120V AC	3000K	800 lm	15°	S(Silver), W(White), B(Black)
PAR20A10W30K24*	10W		3000K	800 lm	24°	
PAR20A10W30K36*	10W		3000K	800 lm	36°	

SPECTRORADIOMETRIC CHART

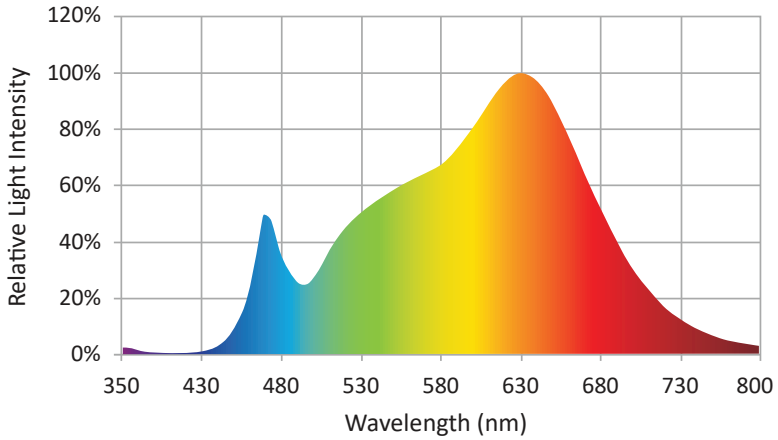


CRI TEST

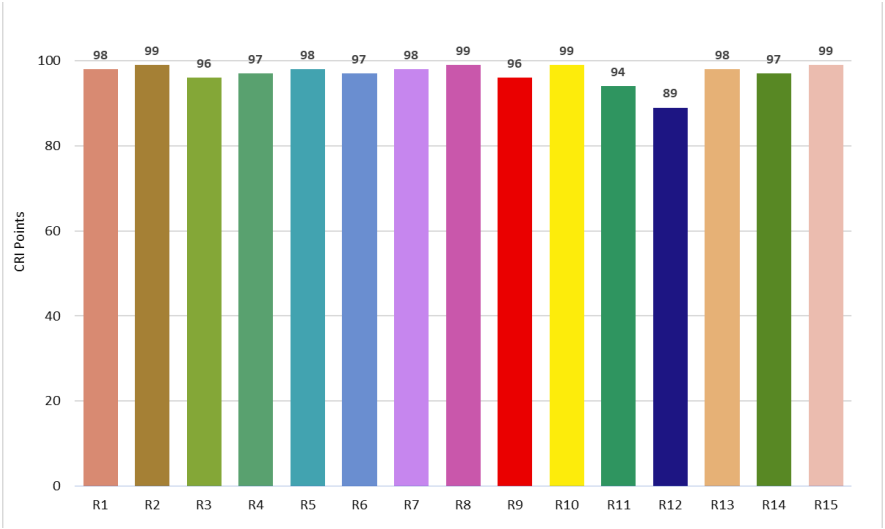


© LTF Technology, All Rights Reserved.


TM30 TEST

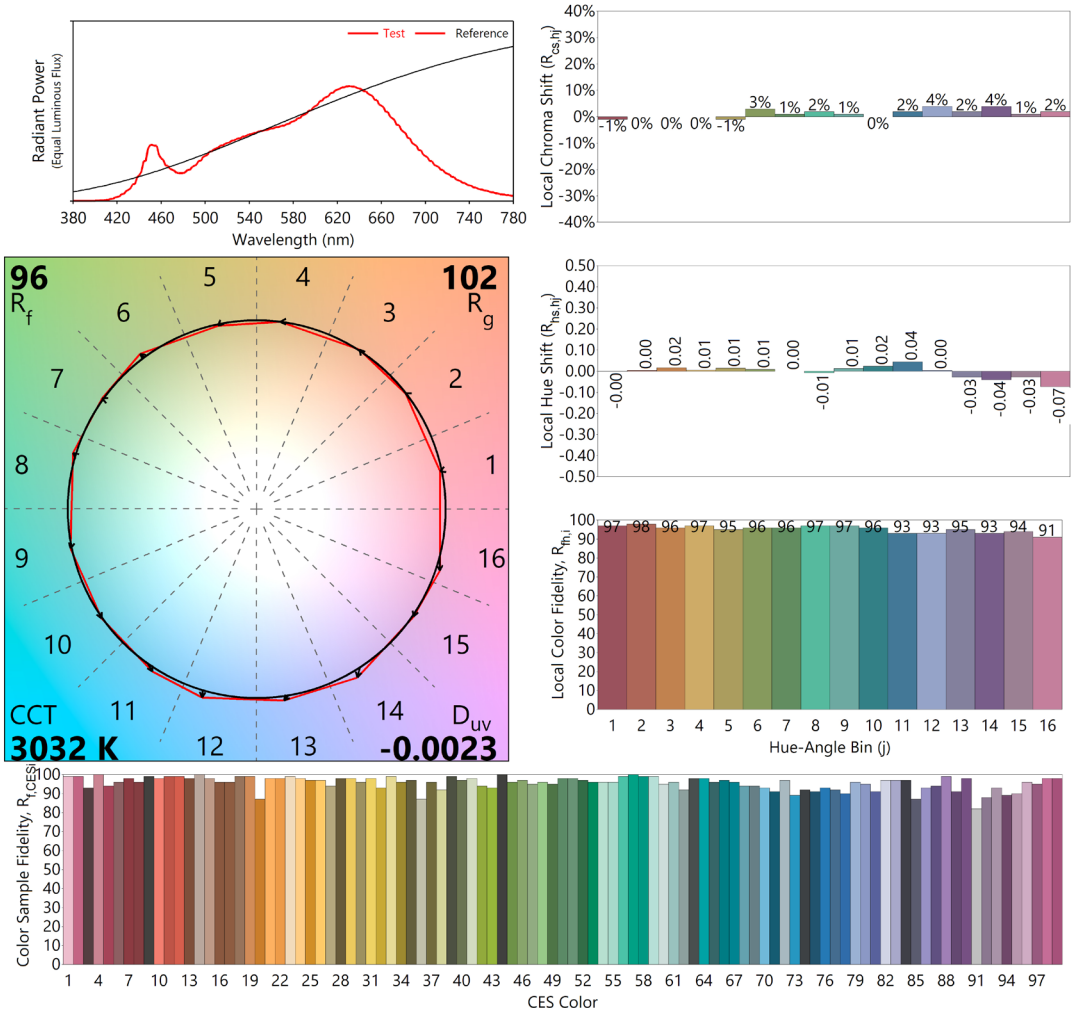


© LTF Technology, All Rights Reserved.

DIMMING CURVE

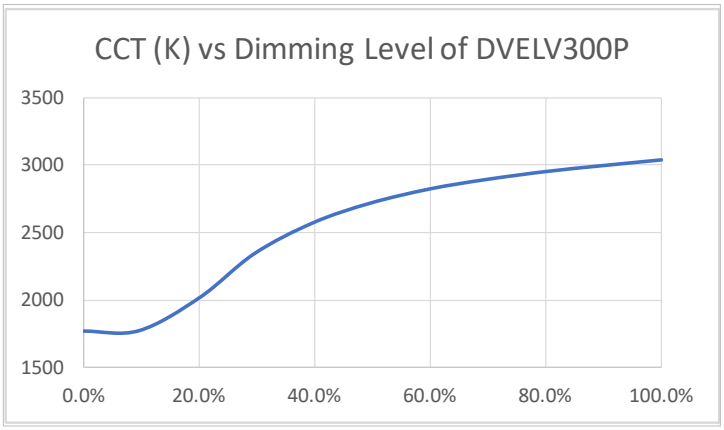

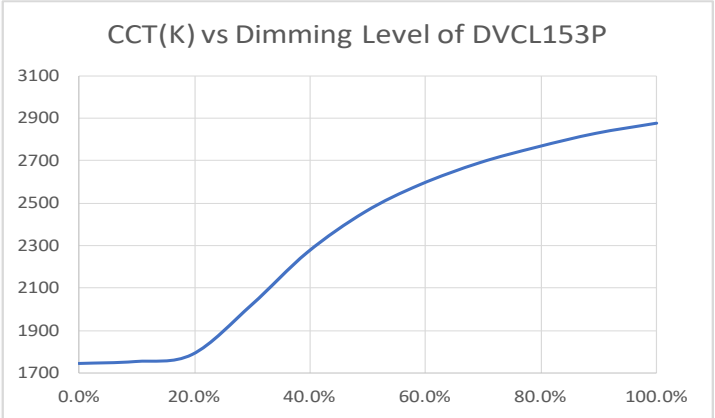

MECHANICAL SPECIFICATIONS

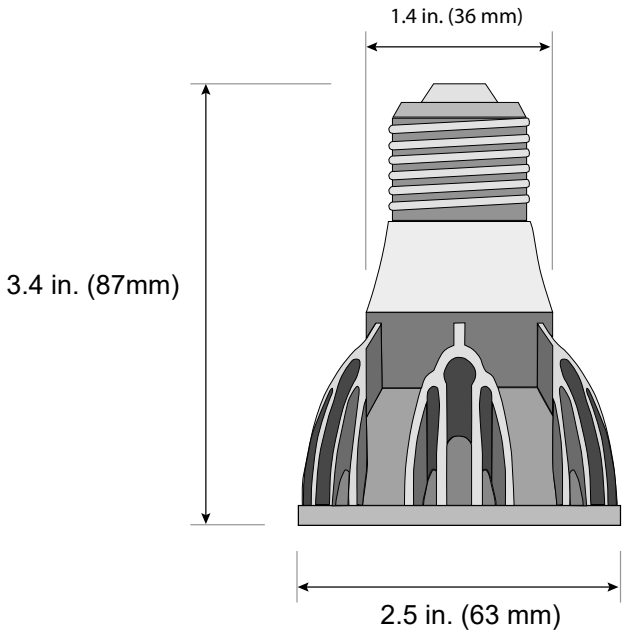

© LTF Technology, All Rights Reserved.