



# Actinic BL PL-S/PL-L

## PL-L 24W/10/4P 1CT/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data

General Information		Voltage (Nom)	
Cap-Base	2G11 [ 2G11]		87 V
Main Application	Insect traps	Mechanical and Housing	
Life to 50% Failures (Nom)	15000 h	Cap-Base Information	4 Pins
Useful Life (Nom)	2000 h	Approval and Application	
Light Technical		Mercury (Hg) Content (Max)	4.4 mg
Color Code	210 [ leadfree 360 glass (10)]	Mercury (Hg) Content (Nom)	4.2 mg
Color Designation	Ultra Violet A	UV	
Chromaticity Coordinate X (Nom)	228	UV-A Radiation 100Hr (IEC)	4.9 W
Chromaticity Coordinate Y (Nom)	230	Product Data	
UV Depreciation at 500 h	17 %	Full product code	871150095206640
UV Depreciation at 2000 h	40 %	Order product name	PL-L 24W/10/4P 1CT/25
UV Depreciation at 5000 h	60 %	EAN/UPC - Product	8711500952066
Operating and Electrical		Order code	927903221007
Power (Rated) (Nom)	24 W	Numerator - Quantity Per Pack	1
Lamp Current (Nom)	0.345 A	Numerator - Packs per outer box	25


# Actinic BL PL-S/PL-L

Material Nr. (12NC)	927903221007
Net Weight (Piece)	82.000 g

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




PL-L 24W/210/4P

Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
PL-L 24W/10/4P 1CT/25	18 mm	39 mm	289.2 mm	315 mm	321.6 mm

## Photometric data

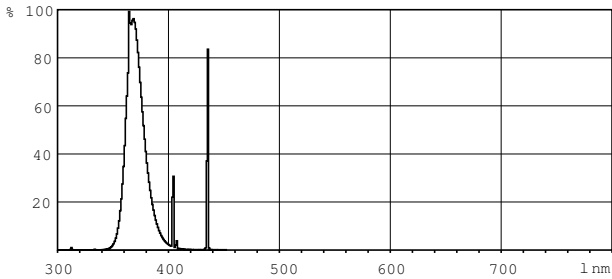

Lightcolor /10, /110 & /210

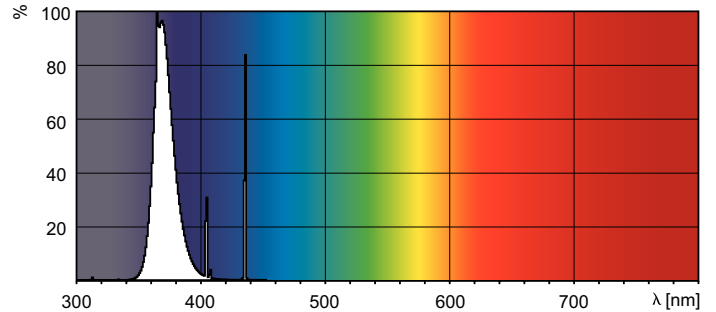

Lightcolor /10, /110 & /210

