



PL-S 2 Pin

PL-S 11W/840/2P 1CT/25

PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.


Product data

General Information	
Cap base	G23 [G23]
Life to 50% failures (nom.)	8000 h
Light Technical	
Lamp Luminous Flux 25°C EL (Nom)	900 lm
Colour Designation	Cool White (CW)
Lumen maintenance 2,000 hours (nom.)	95 %
Lumen maintenance 5,000 hours (nom.)	85 %
Chromaticity coordinate X (nom.)	380
Chromaticity coordinate Y (nom.)	380
Colour Temperature, horizontal (Nom)	4000 K
Lamp Luminous Efficacy EM (Nom)	77 lm/W
Colour Rendering Index, horiz (Nom)	82
Operating and Electrical	
Power (Rated) (Nom)	11.6 W
Lamp current (nom.)	0.160 A
Voltage (Nom)	89 V

Controls and Dimming	
Dimmable	no
Mechanical and Housing	
Cap base information	2P
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Product Data	
Full product code	871150070666900
Order product name	PL-S 11W/840/2P 1CT/25
EAN/UPC – product	8711500706669
Order code	927902308465
Local Code	PLS11W8402P
Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	927902308465
Net weight (piece)	0.043 kg

PL-S 2 Pin


Dimensional drawing




PL-S 11W/840/2P

Product	D	D1	C
PL-S 11W/840/2P 1CT/25	27.1 mm	13 mm	236.3 mm

Photometric data

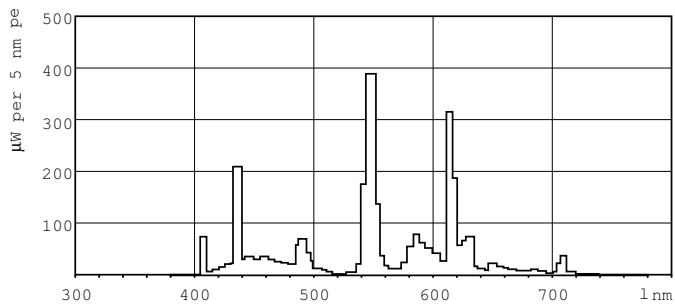

Lightcolour /840

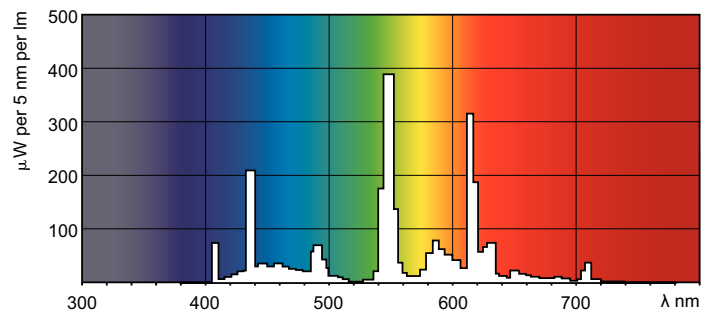

Lightcolour /840

